

---

**py-uds**  
*Release 0.3.0*

**Maciej Dąbrowski**

**Nov 03, 2023**



# CONTENTS

<b>1 Installation</b>	<b>1</b>
1.1 Released versions . . . . .	1
1.2 Development version . . . . .	1
<b>2 User Guide</b>	<b>3</b>
2.1 Diagnostic Messages . . . . .	3
2.2 Segmentation . . . . .	6
2.3 Transport Interfaces . . . . .	9
2.4 Client Simulation . . . . .	13
2.5 Server Simulation . . . . .	14
<b>3 Examples</b>	<b>15</b>
3.1 CAN . . . . .	15
<b>4 API Reference</b>	<b>21</b>
4.1 uds . . . . .	21
<b>5 UDS Knowledge Base</b>	<b>131</b>
5.1 UDS OSI Model . . . . .	131
5.2 Diagnostic Message . . . . .	133
5.3 UDS Packet . . . . .	150
5.4 Segmentation . . . . .	160
5.5 Performance and Error Handling . . . . .	161
<b>6 Contribution</b>	<b>167</b>
6.1 How to contribute? . . . . .	167
6.2 Sponsoring . . . . .	167
6.3 Reporting issues . . . . .	167
6.4 Our Sponsors . . . . .	167
<b>7 Overview</b>	<b>169</b>
<b>8 Implementation Status</b>	<b>171</b>
8.1 Features . . . . .	171
8.2 Buses supported . . . . .	171
<b>9 License</b>	<b>173</b>
<b>10 Contact</b>	<b>175</b>
<b>Python Module Index</b>	<b>177</b>



## INSTALLATION

### 1.1 Released versions

It is **recommended to use released versions** as they were fully tested and are considered as stable. UDS package is distributed via [PyPI](#). All versions and other distribution related details can be found on <https://pypi.org/project/py-uds/> page.

- To install the package, run the following command in your command line interface:

```
pip install py-uds
```

- To update your installation to the newest version of the package, run the following command:

```
pip install -U py-uds
```

### 1.2 Development version

For people who likes risk, but looking for features that are currently under the development, the following command will help with installing the development version of the package that is currently stored on *main* branch of [github repository](#):

```
pip install git+https://github.com/mdabrowski1990/uds.git@main
```

**Warning:** Use this code on your own responsibility.



## USER GUIDE

## 2.1 Diagnostic Messages

Implementation related to diagnostic messages is located in `uds.message` sub-package.

### 2.1.1 UDS Message Implementation

*Diagnostic messages* implementation is divided into two parts:

- *UDS Message* - storage for a new diagnostic message definition
- *UDS Message Record* - storage for historic information of a diagnostic message that was either received or transmitted

#### UDS Message

*UdsMessage* class is meant to provide containers for a new *diagnostic messages* information. Once a diagnostic message object is created, it stores all diagnostic message information that were provided by a user. One can **use these objects to execute complex operations** (provided in other subpackages of `uds`) such as diagnostic messages transmission or segmentation.

---

**Note:** All *UdsMessage* attributes are validated on each value change, therefore a user will face an exception if one tries to set an invalid (e.g. incompatible with the annotation) value to any of these attributes.

---

Example code:

```
import uds

# example how to create an object
uds_message = uds.message.UdsMessage(payload=[0x10, 0x03],
                                         addressing_type=uds.transmission_
                                         ↪attributes.AddressingType.PHYSICAL)

# raw message attribute reassignment
uds_message.payload = (0x62, 0x01, 0x23, 0x45, 0x67, 0x89, 0xAB, 0xCD, 0xEF)

# addressing attribute reassignment
uds_message.addressing_type = uds.transmission_attributes.AddressingType.
                                         ↪FUNCTIONAL
```

## UDS Message Record

*UdsMessageRecord* class is meant to provide containers for historic information of *diagnostic messages* that were either transmitted or received.

---

**Note:** A user should not create objects of this class in normal cases, but one would probably use them quite often as they are returned by other layers of *uds* package.

---

**Warning:** All *UdsMessageRecord* attributes are read only (they are set only once upon an object creation) as they store historic data and history cannot be changed (*can't it, right?*).

A user will face an exception if one tries to modify any attribute.

### 2.1.2 UDS Messages Data

Implementation of data parameters that are part of diagnostic messages data.

#### UDS data parameters:

- *Service Identifiers* - are implemented by:
  - *RequestSID*
  - *ResponseSID*
  - *Negative Response Codes*

#### Service Identifiers

Implementation of *Service Identifier (SID)* values.

#### RequestSID

Enum *RequestSID* contains definitions of request *Service Identifiers* values.

**Warning:** *RequestSID* does not contain definition for every POSSIBLE\_REQUEST\_SIDS value as some Request SID values are reserved for further extension by UDS specification and others are ECU specific (defined by ECU's manufacturer).

---

**Note:** Use *add\_member()* method on *RequestSID* class to add Request SID value.

---

#### Example code:

```
import uds

# check if a value (0xBA in the example) is a Request SID value
uds.message.RequestSID.is_request_sid(0xBA)
```

(continues on next page)

(continued from previous page)

```
# check if there is member defined for the value
uds.message.RequestSID.is_member(0xBA)

# example how to add a new Request SID value
new_member = uds.message.RequestSID.add_member("NewRequestSIDMemberName", 0xBA)

# check if the value was added as a new member
uds.message.RequestSID.is_member(new_member)
uds.message.RequestSID.is_member(0xBA)
```

## ResponseSID

Enum *ResponseSID* contains definitions of response *Service Identifiers* values.

**Warning:** *ResponseSID* does not contain definition for every POSSIBLE\_RESPONSE\_SIDS value as some Response SID values are reserved for further extension by UDS specification and other are ECU specific (defined by ECU's manufacturer).

**Note:** Use *add\_member()* method on *ResponseSID* class to add Response SID.

### Example code:

```
import uds

# check if a value (0xFA in the example) is a Response SID value
uds.message.ResponseSID.is_response_sid(0xFA)

# check if there is member defined for the value
uds.message.ResponseSID.is_member(0xFA)

# example how to add a new Response SID value
new_member = uds.message.ResponseSID.add_member("NewResponseSIDMemberName", ↴
    0xFA)

# check if the value was added as a new member
uds.message.ResponseSID.is_member(new_member)
uds.message.ResponseSID.is_member(0xFA)
```

## Negative Response Codes

Enum `NRC` contains definitions of all common (defined by ISO 14229) *Negative Response Codes* values.

**Warning:** `NRC` does not contain definition for every possible NRC value as some of them are reserved for further extension by UDS specification and other are ECU specific (defined by ECU's manufacturer).

---

**Note:** Use `add_member()` method on `NRC` class to add NRC value that is specific for the system that you communicate with.

---

**Example code:**

```
import uds

# check if a value (0xF0 in the example) is a NRC value
uds.message.NRC.is_member(0xF0)

# example how to add a new NRC value
new_member = uds.message.NRC.add_member("NewNRCMemberName", 0xF0)

# check if the value was added as a new member
uds.message.NRC.is_member(new_member)
uds.message.NRC.is_member(0xF0)
```

## 2.2 Segmentation

Implementation of *segmentation process* is located in `uds.segmentation` sub-package.

### 2.2.1 AbstractSegmenter

`AbstractSegmenter` defines common API and contains common code for all segmenter classes. Each concrete segmenter class handles segmentation process for a specific bus.

**Warning:** A user shall not use `AbstractSegmenter` directly, but one is able (and encouraged) to use `AbstractSegmenter` implementation on any of its children classes.

### 2.2.2 CanSegmenter

`CanSegmenter` handles segmentation process specific for CAN bus.

Following functionalities are provided by `CanSegmenter`:

- Configuration of the segmenter:

As a user, you are able to configure `CanSegmenter` parameters which determines the addressing (Addressing Format and Addressing Information of input and output CAN packets) and the content (e.g. Filler Byte value and whether to use CAN Frame Data Optimization) of CAN packets.

**Example code:**

```

import uds

# define Addressing Information for a CAN Node
can_node_addressing_information = uds.can.CanAddressingInformation(
    addressing_format=uds.can.CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
    tx_physical={"can_id": 0x611},
    rx_physical={"can_id": 0x612},
    tx_functional={"can_id": 0x6FF},
    rx_functional={"can_id": 0x6FE})

# configure CAN Segmeneter for this CAN Node
can_segmenter = uds.segmentation.CanSegmenter(addressing_information=can_
    ↴node_addressing_information,
                                                dlc=8,
                                                use_data_optimization=False,
                                                filler_byte=0xFF)

# change CAN Segmeneter configuration
can_segmenter.addressing_information = uds.can.CanAddressingInformation(
    uds.can.CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
    tx_physical={"can_id": 0x612},
    rx_physical={"can_id": 0x611},
    tx_functional={"can_id": 0x6FE},
    rx_functional={"can_id": 0x6FF})
can_segmenter.dlc=0xF
can_segmenter.use_data_optimization = True
can_segmenter.filler_byte = 0xAA

```

- Diagnostic message segmentation:

As a user, you are able to *segment diagnostic messages* (objects of `UdsMessage` class) into CAN packets (objects for `CanPacket` class).

**Example code:**

```

# let's assume that we have `can_segmenter` already configured as presented,
# in configuration example above

# define diagnostic message to segment
uds_message_1 = uds.message.UdsMessage(payload=[0x3E, 0x00],
                                         addressing_type=uds.transmission_
                                         ↴attributes.AddressingType.FUNCTIONAL)
uds_message_2 = uds.message.UdsMessage(payload=[0x62, 0x10, 0x00] +
                                         ↴[0x20]*100,
                                         addressing_type=uds.transmission_
                                         ↴attributes.AddressingType.PHYSICAL)

# use preconfigured segmeneter to segment the diagnostic messages
can_packets_1 = can_segmenter.segmentation(uds_message_1) # output: Single_
# Frame
can_packets_2 = can_segmenter.segmentation(uds_message_2) # output: First_
# Frame with Consecutive Frame(s)

```

---

**Note:** It is impossible to segment functionally addressed diagnostic message into First Frame and Consecutive Frame(s) as such result is considered incorrect according to *UDS ISO Standards*.

---

- CAN packets desegmentation:

As a user, you are able to *desegment CAN packets* (either objects of *CanPacket* or *CanPacketRecord* class) into diagnostic messages (either objects of *UdsMessage* or *UdsMessageRecord* class).

**Example code:**

```
# let's assume that we have `can_segmenter` already configured as presented
# in configuration example above

# define CAN packets to desegment
can_packets_1 = [
    uds.packet.CanPacket(packet_type=uds.packet.CanPacketType.SINGLE_FRAME,
                         addressing_format=uds.can.CanAddressingFormat.
                         EXTENDED_ADDRESSING,
                         addressing_type=uds.transmission_attributes.
                         AddressingType.FUNCTIONAL,
                         can_id=0x6A5,
                         target_address=0x0C,
                         payload=[0x3E, 0x80])
]
can_packets_2 = [
    uds.packet.CanPacket(packet_type=uds.packet.CanPacketType.FIRST_FRAME,
                         addressing_format=uds.can.CanAddressingFormat.
                         NORMAL_FIXED_ADDRESSING,
                         addressing_type=uds.transmission_attributes.
                         AddressingType.PHYSICAL,
                         target_address=0x12,
                         source_address=0xE0,
                         dlc=8,
                         data_length=15,
                         payload=[0x62, 0x10, 0x00] + 3*[0x20]),
    uds.packet.CanPacket(packet_type=uds.packet.CanPacketType.CONSECUTIVE_
                         FRAME,
                         addressing_format=uds.can.CanAddressingFormat.
                         NORMAL_FIXED_ADDRESSING,
                         addressing_type=uds.transmission_attributes.
                         AddressingType.PHYSICAL,
                         target_address=0x12,
                         source_address=0xE0,
                         dlc=8,
                         sequence_number=1,
                         payload=7*[0x20]),
    uds.packet.CanPacket(packet_type=uds.packet.CanPacketType.CONSECUTIVE_
                         FRAME,
                         addressing_format=uds.can.CanAddressingFormat.
                         NORMAL_FIXED_ADDRESSING,
                         addressing_type=uds.transmission_attributes.
                         AddressingType.PHYSICAL,
                         target_address=0x12,
```

(continues on next page)

(continued from previous page)

```

        source_address=0xE0,
        sequence_number=1,
        payload=2 * [0x20],
        filler_byte=0x99
    ]

# use preconfigured segmenter to desegment the CAN packets
uds_message_1 = can_segmenter.desegmentation(can_packets_1)
uds_message_2 = can_segmenter.desegmentation(can_packets_2)

```

**Warning:** Desegmentation performs only sanity check of CAN packets content, therefore some inconsistencies with Diagnostic on CAN standard might be silently accepted as long as a message can be unambiguously decoded out of provided CAN packets.

**Note:** Desegmentation can be performed for any CAN packets (not only those targeting this CAN Node) in any format.

## 2.3 Transport Interfaces

Transport interfaces are meant to handle Physical (layer 1), Data (layer 2), Network (layer 3) and Transport (layer 4) layers of UDS OSI model which are unique for every communication bus. First two layers (Physical and Data Link) are usually handled by some external packages. Abstract API that is common for all Transport Interfaces (and therefore buses) is defined in [AbstractTransportInterface](#) class. The implementation is located in [uds.transport\\_interface](#) sub-package.

### 2.3.1 CAN Transport Interfaces

The implementation for Transport Interfaces that can be used with CAN bus is located in [uds.transport\\_interface.can\\_transport\\_interface.py](#) module.

#### Common

Common implementation for all all CAN Transport Interfaces is included in [AbstractCanTransportInterface](#).

**Warning:** A user shall not use [AbstractCanTransportInterface](#) directly, but one is able (and encouraged) to use [AbstractCanTransportInterface](#) implementation on any of its children classes.

## Configuration

CAN bus specific configuration is set upon calling `uds.transport_interface.can_transport_interface.AbstractCanTransportInterface.__init__()` method. The following configuration parameters are set then:

- Addressing Information of this CAN node - attribute `addressing_information`
- driver for a CAN bus interface - attribute `bus_manager`
- timing parameters (`N_Br`, `N_Cs`) - attributes `n_br` and `n_cs`
- communication timeout parameters (`N_As`, `N_Ar`, `N_Bs`, `N_Cr`) - attributes `n_as_timeout`, `n_ar_timeout`, `n_bs_timeout` and `n_cr_timeout`
- UDS message segmentation parameters (*base DLC of a CAN frame*, flag whether to use *data optimization for CAN frame*, and the value to use for *CAN frame data padding*) - attributes `d1c`, `use_data_optimization`, `filler_byte`,

Most of these attributes (all except `addressing_information`) can be changed after object is created.

## Python-CAN

Class `PyCanTransportInterface` contains the implementation of CAN Transport Interface that uses `python-can` package for receiving and transmitting CAN frames.

## Configuration

Configuration is set upon calling `uds.transport_interface.can_transport_interface.PyCanTransportInterface.__init__()` method and from the user perspective it does not provide any additional features to `common` implementation provided by `uds.transport_interface.can_transport_interface.AbstractCanTransportInterface.__init__()`.

Example code:

```
import uds
from can import Bus

# define example python-can bus interface (https://python-can.readthedocs.io/en/stable/
# bus.html#bus-api)
python_can_interface = Bus(interface="kvaser", channel=0, fd=True, receive_own_
messages=True)

# define Addressing Information for a CAN Node
can_node_addressing_information = uds.can.CanAddressingInformation(
    addressing_format=uds.can.CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
    tx_physical={"can_id": 0x611},
    rx_physical={"can_id": 0x612},
    tx_functional={"can_id": 0x6FF},
    rx_functional={"can_id": 0x6FE})

# configure CAN Transport Interface for this CAN Node
can_transport_interface = uds.transport_interface.PyCanTransportInterface(
    can_bus_manager=python_can_interface,
    addressing_information=can_node_addressing_information,
    n_as_timeout=50,
```

(continues on next page)

(continued from previous page)

```

n_ar_timeout=900,
n_bs_timeout=50,
n_br=10,
n_cs=0,
n_cr_timeout = 900,
dlc=0xF,
use_data_optimization=True,
filler_byte=0x55)

# change CAN Transport Interface configuration
can_transport_interface.n_as_timeout = uds.transport_interface.PyCanTransportInterface.N_
↪AS_TIMEOUT
can_transport_interface.n_ar_timeout = uds.transport_interface.PyCanTransportInterface.N_
↪AR_TIMEOUT
can_transport_interface.n_bs_timeout = uds.transport_interface.PyCanTransportInterface.N_
↪BS_TIMEOUT
can_transport_interface.n_br = uds.transport_interface.PyCanTransportInterface.DEFAULT_N_
↪BR
can_transport_interface.n_cs = uds.transport_interface.PyCanTransportInterface.DEFAULT_N_
↪CS
can_transport_interface.n_cr_timeout = uds.transport_interface.PyCanTransportInterface.N_
↪CR_TIMEOUT
can_transport_interface.dlc = 8
can_transport_interface.use_data_optimization = False
can_transport_interface.filler_byte = 0xAA

```

## Send Packet

Once an object of `PyCanTransportInterface` class is created, there are two methods which can be used to transmit CAN packets:

- `send_packet()` - for synchronous implementation
- `async_send_packet()` - for asynchronous implementation

### Example synchronous code:

```

# let's assume that we have `can_transport_interface` already configured as presented in_
↪configuration example above

# define some UDS message to send
message = uds.message.UdsMessage(addressing_type=uds.transmission_attributes.
↪AddressingType.PHYSICAL,
                                  payload=[0x10, 0x03])

# segment the message to create a CAN packet
can_packet = can_transport_interface.segmenter.segmentation(message)[0]

# send CAN packet and receive CAN packet record with historic information about the_
↪transmission and the transmitted CAN packet
can_packet_record = can_transport_interface.send_packet(can_packet)

```

### Example asynchronous code:

```
# let's assume that we have `can_transport_interface` already configured as presented in
# configuration example above

# define some UDS message to send
message = uds.message.UdsMessage(addressing_type=uds.transmission_attributes.
    ↪AddressingType.PHYSICAL,
                                payload=[0x10, 0x03])

# segment the message to create a CAN packet
can_packet = can_transport_interface.segmenter.segmentation(message)[0]

# send CAN packet and receive CAN packet record with historic information about the
# transmission and the transmitted CAN packet
can_packet_record = await can_transport_interface.async_send_packet(can_packet)
```

---

**Note:** In the example above, only a coroutine code was presented. If you need a manual how to run an asynchronous program, visit <https://docs.python.org/3/library/asyncio-runner.html#running-an-asyncio-program>.

---

**Warning:** Synchronous and asynchronous implementation shall not be mixed, so use either `send_packet()` and `receive_packet()` (synchronous) or `async_send_packet()` and `async_receive_packet()` (asynchronous) methods for transmitting and receiving CAN Packets.

#### See also:

*Examples for python-can Transport Interface*

### Receive Packet

Once an object of `PyCanTransportInterface` class is created, there are two methods which can be used to receive CAN packets:

- `receive_packet()` - for synchronous implementation
- `async_receive_packet()` - for asynchronous implementation

#### Example synchronous code:

```
# let's assume that we have `can_transport_interface` already configured as presented in
# configuration example above

# receive a CAN packet with timeout set to 1000 ms
can_packet_record = can_transport_interface.receive_packet(timeout=1000)
```

#### Example asynchronous code:

```
# let's assume that we have `can_transport_interface` already configured as presented in
# configuration example above

# receive a CAN packet with timeout set to 1000 ms
can_packet_record = await can_transport_interface.async_receive_packet(timeout=1000)
```

---

**Note:** In the example above, only a coroutine code was presented. If you need a manual how to run an asynchronous program, visit <https://docs.python.org/3/library/asyncio-runner.html#running-an-asyncio-program>.

---

**Warning:** Synchronous and asynchronous implementation shall not be mixed, so use either `send_packet()` and `receive_packet()` (synchronous) or `async_send_packet()` and `async_receive_packet()` (asynchronous) methods for transmitting and receiving CAN Packets.

#### See also:

*Examples for python-can Transport Interface*

### 2.3.2 FlexRay Transport Interfaces

FlexRay FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

### 2.3.3 Ethernet Transport Interfaces

Ethernet FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

### 2.3.4 K-Line Transport Interfaces

K-Line FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

### 2.3.5 LIN Transport Interfaces

LIN FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

### 2.3.6 Custom Transport Interfaces

THIS FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

## 2.4 Client Simulation

This chapter describes how to simulate client (diagnostic tester or any other node which sends its request to other ECUs) in UDS communication. Client simulation enables sending diagnostic requests and receiving diagnostic responses from connected nodes.

THIS FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.

## 2.5 Server Simulation

This chapter describes how to simulate server (any ECU that is recipient of diagnostic requests) in UDS communication. Server simulation supports defining diagnostic responses to incoming requests and then python program send them automatically according to the configuration provided by the user.

**THIS FEATURE IS PLANNED BUT NOT IMPLEMENTED YET, THEREFORE THERE ARE NO MORE INFORMATION TO DISPLAY.**

## EXAMPLES

Location of all example files: <https://github.com/mdabrowski1990/uds/tree/main/examples>

### 3.1 CAN

Code examples of UDS protocol communication over CAN bus.

See also:

<https://github.com/mdabrowski1990/uds/tree/main/examples/can>

#### 3.1.1 Python-CAN

Examples with `python-can` package being used for controlling CAN bus (handling CAN frames transmission and reception).

See also:

<https://github.com/mdabrowski1990/uds/tree/main/examples/can/python-can>

#### Kvaser interface

- Send CAN packets (synchronous implementation):

```
from pprint import pprint
from time import sleep

from can import Bus
from uds.transport_interface import PyCanTransportInterface
from uds.can import CanAddressingInformation, CanAddressingFormat
from uds.message import UdsMessage
from uds.transmission_attributes import AddressingType


def main():
    # configure CAN interfaces
    kvaser_interface_1 = Bus(interface="kvaser", channel=0, fd=True, receive_own_
    ↵messages=True)
    kvaser_interface_2 = Bus(interface="kvaser", channel=1, fd=True, receive_own_
    ↵messages=True)
```

(continues on next page)

(continued from previous page)

```

# configure Addressing Information of a CAN Node
addressing_information = CanAddressingInformation(
    addressing_format=CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
    tx_physical={"can_id": 0x611},
    rx_physical={"can_id": 0x612},
    tx_functional={"can_id": 0x6FF},
    rx_functional={"can_id": 0x6FE})

# create Transport Interface object for UDS communication
can_ti = PyCanTransportInterface(can_bus_manager=kvaser_interface_1,
                                  addressing_information=addressing_information)

# define UDS Messages to send
message_1 = UdsMessage(addressing_type=AddressingType.PHYSICAL, payload=[0x10, 0x03])
message_2 = UdsMessage(addressing_type=AddressingType.FUNCTIONAL, payload=[0x3E])

# create CAN packets that carries those UDS Messages
packet_1 = can_ti.segmenter.segmentation(message_1)[0]
packet_2 = can_ti.segmenter.segmentation(message_2)[0]

# send CAN Packet 1
record_1 = can_ti.send_packet(packet_1)
pprint(record_1.__dict__)

# send CAN Packet 2
record_2 = can_ti.send_packet(packet_2)
pprint(record_2.__dict__)

# close connections with CAN interfaces
del can_ti
sleep(0.1) # wait to make sure all tasks are closed
kvaser_interface_1.shutdown()
kvaser_interface_2.shutdown()

if __name__ == "__main__":
    main()

```

- Send CAN packets (asynchronous implementation):

```

import asyncio
from pprint import pprint

from can import Bus
from uds.transport_interface import PyCanTransportInterface
from uds.can import CanAddressingInformation, CanAddressingFormat
from uds.message import UdsMessage
from uds.transmission_attributes import AddressingType

async def main():

```

(continues on next page)

(continued from previous page)

```

# configure CAN interfaces
kvaser_interface_1 = Bus(interface="kvaser", channel=0, fd=True, receive_own_
˓→messages=True)
kvaser_interface_2 = Bus(interface="kvaser", channel=1, fd=True, receive_own_
˓→messages=True)

# configure Addressing Information of a CAN Node
addressing_information = CanAddressingInformation(
    addressing_format=CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
    tx_physical={"can_id": 0x611},
    rx_physical={"can_id": 0x612},
    tx_functional={"can_id": 0x6FF},
    rx_functional={"can_id": 0x6FE})

# create Transport Interface object for UDS communication
can_ti = PyCanTransportInterface(can_bus_manager=kvaser_interface_1,
                                  addressing_information=addressing_information)

# define UDS Messages to send
message_1 = UdsMessage(addressing_type=AddressingType.PHYSICAL, payload=[0x10, 0x03])
message_2 = UdsMessage(addressing_type=AddressingType.FUNCTIONAL, payload=[0x3E])

# create CAN packets that carries those UDS Messages
packet_1 = can_ti.segmenter.segmentation(message_1)[0]
packet_2 = can_ti.segmenter.segmentation(message_2)[0]

# send CAN Packet 1
record_1 = await can_ti.async_send_packet(packet_1)
pprint(record_1.__dict__)

# send CAN Packet 2
record_2 = await can_ti.async_send_packet(packet_2)
pprint(record_2.__dict__)

# close connections with CAN interfaces
del can_ti
await asyncio.sleep(0.1) # wait to make sure all tasks are closed
kvaser_interface_1.shutdown()
kvaser_interface_2.shutdown()

if __name__ == "__main__":
    asyncio.run(main())

```

- Receive CAN packets (synchronous implementation):

```

from pprint import pprint
from threading import Timer
from time import sleep

from can import Bus, Message
from uds.transport_interface import PyCanTransportInterface

```

(continues on next page)

(continued from previous page)

```

from uds.can import CanAddressingInformation, CanAddressingFormat

def main():
    # configure CAN interfaces
    kvaser_interface_1 = Bus(interface="kvaser", channel=0, fd=True, receive_own_
    ↵messages=True)
    kvaser_interface_2 = Bus(interface="kvaser", channel=1, fd=True, receive_own_
    ↵messages=True)

    # configure Addressing Information of a CAN Node
    addressing_information = CanAddressingInformation(
        addressing_format=CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
        tx_physical={"can_id": 0x611},
        rx_physical={"can_id": 0x612},
        tx_functional={"can_id": 0x6FF},
        rx_functional={"can_id": 0x6FE})

    # create Transport Interface object for UDS communication
    can_ti = PyCanTransportInterface(can_bus_manager=kvaser_interface_1,
                                      addressing_information=addressing_information)

    # some frames to be received later on
    frame_1 = Message(arbitration_id=0x6FE, data=[0x10, 0x03])
    frame_2 = Message(arbitration_id=0x611, data=[0x10, 0x03]) # shall be ignored, as_
    ↵it is not observed CAN ID
    frame_3 = Message(arbitration_id=0x612, data=[0x3E, 0x00, 0xAA, 0xAA, 0xAA, 0xA_
    ↵AA, 0xAA])

    # receive CAN packet 1
    Timer(interval=0.1, function=kvaser_interface_1.send, args=(frame_1,)).start() #_
    ↵schedule transmission of frame 1
    record_1 = can_ti.receive_packet(timeout=1000) # receive CAN packet 1 carried by_
    ↵frame 1
    pprint(record_1.__dict__) # show attributes of CAN packet record 1

    # receive CAN packet 2
    Timer(interval=0.3, function=kvaser_interface_1.send, args=(frame_2,)).start() #_
    ↵schedule transmission of frame 2
    Timer(interval=0.8, function=kvaser_interface_1.send, args=(frame_3,)).start() #_
    ↵schedule transmission of frame 3
    record_2 = can_ti.receive_packet(timeout=1000) # receive CAN packet 2 carried by_
    ↵frame 3
    pprint(record_2.__dict__) # show attributes of CAN packet record 2

    # close connections with CAN interfaces
    del can_ti
    sleep(0.1) # wait to make sure all tasks are closed
    kvaser_interface_1.shutdown()
    kvaser_interface_2.shutdown()

```

(continues on next page)

(continued from previous page)

```
if __name__ == "__main__":
    main()
```

- Receive CAN packets (asynchronous implementation):

```
import asyncio
from pprint import pprint

from can import Bus, Message
from uds.transport_interface import PyCanTransportInterface
from uds.can import CanAddressingInformation, CanAddressingFormat


async def main():
    # configure CAN interfaces
    kvaser_interface_1 = Bus(interface="kvaser", channel=0, fd=True, receive_own_
    ↵messages=True)
    kvaser_interface_2 = Bus(interface="kvaser", channel=1, fd=True, receive_own_
    ↵messages=True)

    # configure Addressing Information of a CAN Node
    addressing_information = CanAddressingInformation(
        addressing_format=CanAddressingFormat.NORMAL_11BIT_ADDRESSING,
        tx_physical={"can_id": 0x611},
        rx_physical={"can_id": 0x612},
        tx_functional={"can_id": 0x6FF},
        rx_functional={"can_id": 0x6FE})

    # create Transport Interface object for UDS communication
    can_ti = PyCanTransportInterface(can_bus_manager=kvaser_interface_1,
                                      addressing_information=addressing_information)

    # some frames to be received later on
    frame_1 = Message(arbitration_id=0x6FE, data=[0x10, 0x03])
    frame_2 = Message(arbitration_id=0x611, data=[0x10, 0x03])  # shall be ignored, as_
    ↵it is not observed CAN ID
    frame_3 = Message(arbitration_id=0x612, data=[0x3E, 0x00, 0xAA, 0xAA, 0xAA, 0xAA,_
    ↵0xAA, 0xAA])

    # receive CAN packet 1
    kvaser_interface_2.send(frame_1)  # transmit CAN Frame 1
    record_1 = await can_ti.async_receive_packet(timeout=1000)  # receive CAN packet 1_
    ↵carried by frame 1
    pprint(record_1.__dict__)  # show attributes of CAN packet record 1

    # receive CAN packet 2
    kvaser_interface_2.send(frame_2)  # transmit CAN Frame 2
    kvaser_interface_2.send(frame_3)  # transmit CAN Frame 3
    record_2 = await can_ti.async_receive_packet(timeout=1000)
    pprint(record_2.__dict__)  # show attributes of CAN packet record 2

    # close connections with CAN interfaces
```

(continues on next page)

(continued from previous page)

```
del can_ti
await asyncio.sleep(0.1) # wait to make sure all tasks are closed
kvaser_interface_1.shutdown()
kvaser_interface_2.shutdown()

if __name__ == "__main__":
    asyncio.run(main())
```

**See also:**

<https://github.com/mdabrowski1990/uds/tree/main/examples/can/python-can/kvaser>

## API REFERENCE

This page contains auto-generated API reference documentation<sup>1</sup>.

### 4.1 uds

Package for handling Unified Diagnostic Services (UDS) protocol defined by ISO-14229.

**The package is meant to provide tools that enables:**

- monitoring UDS communication
- simulation of any UDS node (either a client or a server)
- testing of a device that supports UDS
- injection of communication faults on any layers 3-7 of UDS OSI Model

**The package is created with an idea to support any communication bus:**

- CAN
- LIN
- Ethernet
- FlexRay
- K-Line

#### 4.1.1 Subpackages

##### uds.can

A subpackage with CAN bus specific implementation.

**It provides tools for:**

- definition of CAN specific attributes: - CAN Addressing Formats - Flow Status
- handlers for CAN frame fields: - DLC - CAN ID
- handler for CAN specific packets: - Single Frame - First Frame - Consecutive Frame - Flow Status

---

<sup>1</sup> Created with [sphinx-autoapi](#)

## Submodules

### uds.can.abstract\_addressing\_information

Abstract definition of Addressing Information handler.


## Module Contents

### Classes

<code>PacketAIParamsAlias</code>	Alias of <i>Addressing Information</i> parameters of CAN packets stream.
<code>AbstractCanAddressingInformation</code>	Abstract definition of CAN Entity (either server or client) Addressing Information.

```
class uds.can.abstract_addressing_information.PacketAIParamsAlias
```

Bases: TypedDict

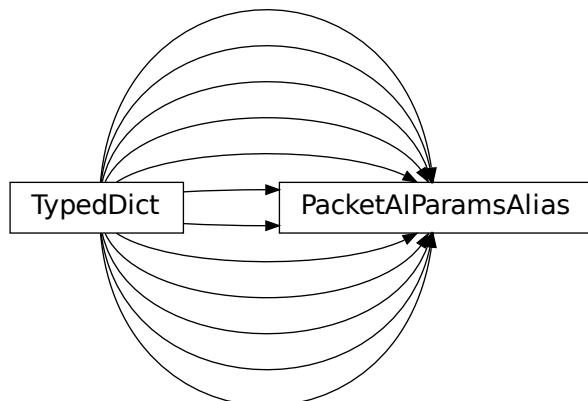

Alias of *Addressing Information* parameters of CAN packets stream.

Initialize self. See help(type(self)) for accurate signature.

`addressing_format: uds.can.addressing_format.CanAddressingFormat`

`addressing_type: uds.transmission_attributes.AddressingType`

`can_id: int`

`target_address: int | None`

`source_address: int | None`

```

address_extension: int | None

class uds.can.abstract_addressing_information.AbstractCanAddressingInformation(rx_physical,
tx_physical,
rx_functional,
tx_functional)

Bases: abc.ABC

```



Abstract definition of CAN Entity (either server or client) Addressing Information.


Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing functionally addressed communication.

```
class InputAIParamsAlias
```

Bases: TypedDict

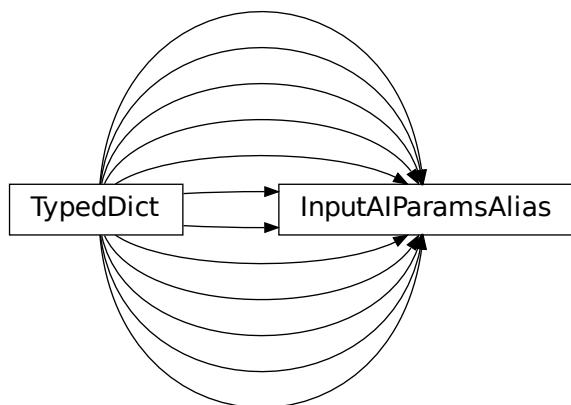

Alias of *Addressing Information* configuration parameters.

Initialize self. See help(type(self)) for accurate signature.

**can\_id:** int

**target\_address:** int

**source\_address:** int

**address\_extension:** int

**abstract property addressing\_format:** uds.can.addressing\_format.CanAddressingFormat

CAN Addressing format used.

**Return type**

*uds.can.addressing\_format.CanAddressingFormat*

**property rx\_packets\_physical\_ai:** PacketAIParamsAlias

Addressing Information parameters of incoming physically addressed CAN packets.

**Return type**

*PacketAIParamsAlias*

**property tx\_packets\_physical\_ai:** PacketAIParamsAlias

Addressing Information parameters of outgoing physically addressed CAN packets.

**Return type**

*PacketAIParamsAlias*

**property rx\_packets\_functional\_ai:** PacketAIParamsAlias

Addressing Information parameters of incoming functionally addressed CAN packets.

**Return type**

*PacketAIParamsAlias*

**property tx\_packets\_functional\_ai:** PacketAIParamsAlias

Addressing Information parameters of outgoing functionally addressed CAN packets.

**Return type**

*PacketAIParamsAlias*

**ADDRESSING\_FORMAT\_NAME:** str = 'addressing\_format'

Name of *CAN Addressing Format* parameter in Addressing Information.

**ADDRESSING\_TYPE\_NAME:** str

Name of *Addressing Type* parameter in Addressing Information.

**CAN\_ID\_NAME:** str = 'can\_id'

Name of CAN Identifier parameter in Addressing Information.

**TARGET\_ADDRESS\_NAME:** str

Name of Target Address parameter in Addressing Information.

**SOURCE\_ADDRESS\_NAME:** str

Name of Source Address parameter in Addressing Information.

**ADDRESS\_EXTENSION\_NAME:** str = 'address\_extension'

Name of Address Extension parameter in Addressing Information.

**AI\_DATA\_BYTES\_NUMBER: int**

Number of CAN Frame data bytes that are used to carry Addressing Information.

**abstract classmethod validate\_packet\_ai(*addressing\_type*=None, *can\_id*=None, *target\_address*=None, *source\_address*=None, *address\_extension*=None)**

Validate Addressing Information parameters of a CAN packet.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type to validate.
- **can\_id** (*Optional[int]*) – CAN Identifier value to validate.
- **target\_address** (*Optional[int]*) – Target Address value to validate.
- **source\_address** (*Optional[int]*) – Source Address value to validate.
- **address\_extension** (*Optional[int]*) – Address Extension value to validate.

**Raises**

- **InconsistentArgumentsError** – Provided values are not consistent with each other (cannot be used together) or with the Addressing format used.
- **UnusedArgumentError** – Provided parameter is not supported by Addressing format used.

**Returns**

Normalized dictionary with the provided information.

**Return type**

*PacketAIParamsAlias*

**uds.can.addressing\_format**


Implementation of CAN Addressing Formats.

**Module Contents****Classes****CanAddressingFormat**

Definition of CAN addressing formats.

**class uds.can.addressing\_format.CanAddressingFormat**

Bases: *aenum.StrEnum*, *uds.utilities.ValidatedEnum*

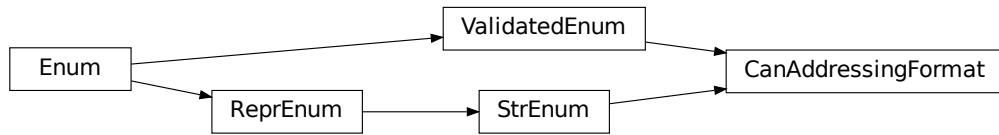

Definition of CAN addressing formats.

*CAN addressing formats* determines how (in which fields of a CAN Packet) *Network Address Information (N\_AI)* is provided.

Initialize self. See help(type(self)) for accurate signature.

**NORMAL\_11BIT\_ADDRESSING:** `CanAddressingFormat = 'Normal 11-bit Addressing'`

*Normal addressing* format that uses 11-bit CAN Identifiers.

**NORMAL\_FIXED\_ADDRESSING:** `CanAddressingFormat = 'Normal Fixed Addressing'`

*Normal fixed addressing* format. It is a subformat of *Normal addressing* which uses 29-bit CAN Identifiers only.

**EXTENDED\_ADDRESSING:** `CanAddressingFormat = 'Extended Addressing'`

*Extended addressing* format.

**MIXED\_11BIT\_ADDRESSING:** `CanAddressingFormat = 'Mixed 11-bit Addressing'`

*Mixed addressing with 11-bit CAN ID* format. It is a subformat of *mixed addressing*.

**MIXED\_29BIT\_ADDRESSING:** `CanAddressingFormat = 'Mixed 29-bit Addressing'`

*Mixed addressing with 29-bit CAN ID* format. It is a subformat of *mixed addressing*.

## uds.can.addressing\_information

Implementation of CAN Addressing Information.

This module contains helper class for managing *Addressing Information* on CAN bus.

### Module Contents

#### Classes

<code>CanAddressingInformation</code>	CAN Entity (either server or client) Addressing Information.
---------------------------------------	--

**class uds.can.addressing\_information.CanAddressingInformation**

CAN Entity (either server or client) Addressing Information.

Create object of CAN Entity (either server or client) Addressing Information.


#### Parameters

- **addressing\_format** – CAN Addressing format used by CAN Entity.

- **rx\_physical** – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** – Addressing Information parameters used for outgoing functionally addressed communication.

```
class DataBytesAIParamsAlias
```

Bases: TypedDict

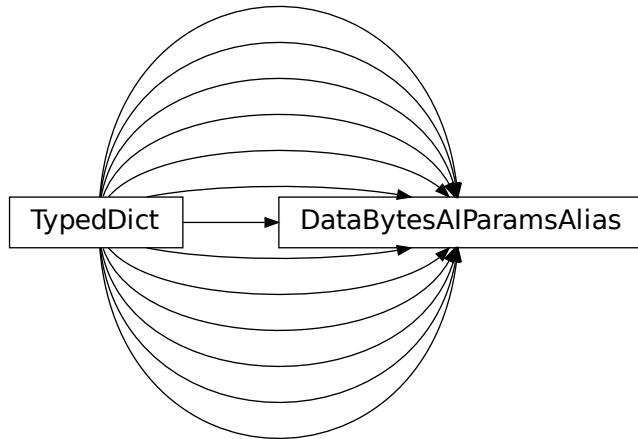

Alias of *Addressing Information* parameters encoded in data field.


Initialize self. See help(type(self)) for accurate signature.

**target\_address:** int

**address\_extension:** int

```
class DecodedAIParamsAlias
```

Bases: TypedDict

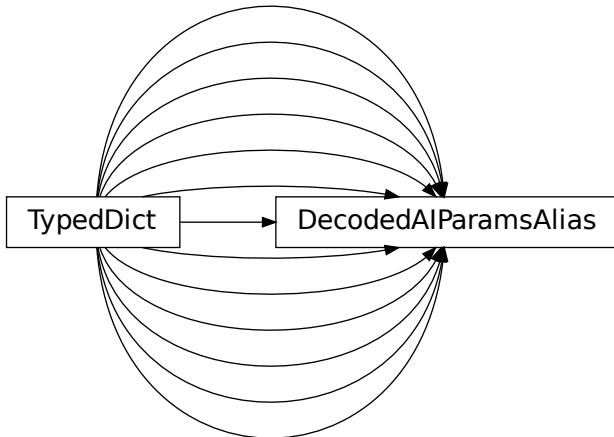

Alias of [Addressing Information](#) parameters encoded in CAN ID and data field.

Initialize self. See help(type(self)) for accurate signature.

**addressing\_type:** `uds.transmission_attributes.AddressingType | None`

**target\_address:** `int | None`

**source\_address:** `int | None`

**address\_extension:** `int | None`

**ADDRESSING\_INFORMATION\_MAPPING:** `Dict[uds.can.addressing_format.CanAddressingFormat, Type[uds.can.abstract_addressing_information.AbstractCanAddressingInformation]]`

Dictionary with CAN Addressing format mapping to Addressing Information handler classes.

**classmethod validate\_packet\_ai**(`addressing_format, addressing_type, can_id=None, target_address=None, source_address=None, address_extension=None`)

Validate Addressing Information parameters of a CAN packet.

#### Parameters

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format value to validate.
- **addressing\_type** (`uds.transmission_attributes.AddressingType`) – Addressing type to validate.
- **can\_id** (`Optional[int]`) – CAN Identifier value to validate.
- **target\_address** (`Optional[int]`) – Target Address value to validate.
- **source\_address** (`Optional[int]`) – Source Address value to validate.
- **address\_extension** (`Optional[int]`) – Address Extension value to validate.

#### Returns

Normalized dictionary with the provided Addressing Information.

**Return type***uds.can.abstract\_addressing\_information.PacketAIParamsAlias***classmethod validate\_ai\_data\_bytes(addressing\_format, ai\_data\_bytes)**

Validate Addressing Information stored in CAN data bytes.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **ai\_data\_bytes** (*uds.utilities.RawBytesAlias*) – Data bytes to validate.

**Raises**

**InconsistentArgumentsError** – Provided number of Addressing Information data bytes does not match Addressing Format used.

**Return type**

None

**classmethod decode\_packet\_ai(addressing\_format, can\_id, ai\_data\_bytes)**

Decode Addressing Information parameters from CAN ID and data bytes.

**Warning:** This methods might not extract full Addressing Information from the provided data as some of them are system specific.

For example, Addressing Type will not be decoded when either Normal 11bit, Extended or Mixed 11bit addressing format is used as the Addressing Type (in such case) depends on system specific behaviour.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **can\_id** (*int*) – Value of CAN Identifier.
- **ai\_data\_bytes** (*uds.utilities.RawBytesAlias*) – Data bytes containing Addressing Information. This parameter shall contain either 0 or 1 byte that is located at the beginning of a CAN frame data field. Number of these bytes depends on *CAN Addressing Format* used.

**Returns**

Dictionary with Addressing Information decoded out of the provided CAN ID and data bytes.

**Return type***DecodedAIParamsAlias***classmethod decode\_ai\_data\_bytes(addressing\_format, ai\_data\_bytes)**

Decode Addressing Information from CAN data bytes.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **ai\_data\_bytes** (*uds.utilities.RawBytesAlias*) – Data bytes containing Addressing Information. This parameter shall contain either 0 or 1 byte that is located at the beginning of a CAN frame data field. Number of these bytes depends on *CAN Addressing Format* used.

**Raises**

**NotImplementedError** – There is missing implementation for the provided Addressing Format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Dictionary with Addressing Information decoded out of the provided data bytes.

**Return type**

*DataBytesAIParamsAlias*

```
classmethod encode_ai_data_bytes(addressing_format, target_address=None,
                                  address_extension=None)
```

Generate a list of data bytes that carry Addressing Information.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **target\_address** (*Optional[int]*) – Target Address value used.
- **address\_extension** (*Optional[int]*) – Source Address value used.

**Raises**

**NotImplementedError** – There is missing implementation for the provided Addressing Format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

List of data bytes that carry Addressing Information in CAN frame Data field.

**Return type**

`uds.utilities.RawBytesListAlias`

```
classmethod get_ai_data_bytes_number(addressing_format)
```

Get number of data bytes that are used to carry Addressing Information.

**Parameters**

**addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.

**Returns**

Number of data bytes in a CAN Packet that are used to carry Addressing Information for provided CAN Addressing Format.

**Return type**

`int`

## **`uds.can.consecutive_frame`**

Implementation specific for Consecutive Frame CAN packets.

This module contains implementation specific for *Consecutive Frame* packets - that includes *Sequence Number (SN)* parameter.

## Module Contents

### Classes

<code>CanConsecutiveFrameHandler</code>	Helper class that provides utilities for Consecutive Frame CAN Packets.
---	---

`class uds.can.consecutive_frame.CanConsecutiveFrameHandler`

Helper class that provides utilities for Consecutive Frame CAN Packets.

`CONSECUTIVE_FRAME_N_PCI: int = 2`

Consecutive Frame N\_PCI value.

`SN_BYTES_USED: int = 1`

Number of CAN Frame data bytes used to carry CAN Packet Type and Sequence Number in Consecutive Frame.

`classmethod create_valid_frame_data(*, addressing_format, payload, sequence_number, dlc=None, filler_byte=DEFAULT_FILLER_BYTE, target_address=None, address_extension=None)`

Create a data field of a CAN frame that carries a valid Consecutive Frame packet.

---

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output. Use `create_any_frame_data()` to create data bytes for a Consecutive Frame with any (also incompatible with ISO 15765) parameters values.

---

### Parameters

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format used by a considered Consecutive Frame.
- **payload** (`uds.utilities.RawBytesAlias`) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **sequence\_number** (`int`) – Value of Sequence Number parameter.
- **dlc** (`Optional[int]`) – DLC value of a CAN frame that carries a considered CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill the unused data bytes.
- **filler\_byte** (`int`) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (`Optional[int]`) – Target Address value carried by this CAN Packet. The value must only be provided if `addressing_format` uses Target Address parameter.
- **address\_extension** (`Optional[int]`) – Address Extension value carried by this CAN packet. The value must only be provided if `addressing_format` uses Address Extension parameter.

### Raises

`InconsistentArgumentsError` – Provided `payload` contains invalid number of bytes to fit it into a properly defined Consecutive Frame data field.

**Returns**

Raw bytes of CAN frame data for the provided Consecutive Frame packet information.

**Return type**

uds.utilities.RawBytesListAlias

```
classmethod create_any_frame_data(*, addressing_format, payload, sequence_number, dlc,
                                 filler_byte=DEFAULT_FILLER_BYTE, target_address=None,
                                 address_extension=None)
```

Create a data field of a CAN frame that carries a Consecutive Frame packet.

---

**Note:** You can use this method to create Consecutive Frame data bytes with any (also inconsistent with ISO 15765) parameters values. It is recommended to use [create\\_valid\\_frame\\_data\(\)](#) to create data bytes for a Consecutive Frame with valid (compatible with ISO 15765) parameters values.

---

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format used by a considered Consecutive Frame.
- **payload** (`uds.utilities.RawBytesAlias`) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **sequence\_number** (`int`) – Value of Sequence Number parameter.
- **dlc** (`int`) – DLC value of a CAN frame that carries a considered CAN Packet.
- **filler\_byte** (`int`) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (`Optional[int]`) – Target Address value carried by this CAN Packet. The value must only be provided if `addressing_format` uses Target Address parameter.
- **address\_extension** (`Optional[int]`) – Address Extension value carried by this CAN packet. The value must only be provided if `addressing_format` uses Address Extension parameter.

**Raises**

**InconsistentArgumentsError** – Provided `payload` contains too many bytes to fit it into a Consecutive Frame data field.

**Returns**

Raw bytes of CAN frame data for the provided Consecutive Frame packet information.

**Return type**

uds.utilities.RawBytesListAlias

```
classmethod is_consecutive_frame(addressing_format, raw_frame_data)
```

Check if provided data bytes encodes a Consecutive Frame packet.

**Warning:** The method does not validate the content of the provided frame data bytes. Only, [CAN Packet Type \(N\\_PCI\)](#) parameter is checked whether contain Consecutive Frame N\_PCI value.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.

- **raw\_frame\_data** (*uds.utilities.RawBytesAlias*) – Raw data bytes of a CAN frame to check.

**Returns**

True if provided data bytes carries Consecutive Frame, False otherwise.

**Return type**

bool

**classmethod decode\_payload(*addressing\_format*, *raw\_frame\_data*)**

Extract diagnostic message payload from Consecutive Frame data bytes.

**Warning:** The output might contain additional filler bytes (they are not part of diagnostic message payload) that were added during *CAN Frame Data Padding*. The presence of filler bytes in *Consecutive Frame* cannot be determined basing solely on the information contained in a Consecutive Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **raw\_frame\_data** (*uds.utilities.RawBytesAlias*) – Raw data bytes of a considered CAN frame.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a Consecutive Frame CAN packet.

**Returns**

Payload bytes (with potential Filler Bytes) of a diagnostic message carried by a considered Consecutive Frame.

**Return type**

*uds.utilities.RawBytesListAlias*

**classmethod decode\_sequence\_number(*addressing\_format*, *raw\_frame\_data*)**

Extract a value of Sequence Number from Consecutive Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.

- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a Consecutive Frame CAN packet.

**Returns**

Extracted value of Sequence Number.

**Return type**

int

**classmethod `get_min_dlc`(*addressing\_format*, *payload\_length*=1)**

Get the minimum value of a CAN frame DLC to carry a Consecutive Frame packet.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format that considered CAN packet uses.
- **payload\_length** (int) – Number of payload bytes that considered CAN packet carries.

**Raises**

- **TypeError** – Provided value of Payload Length is not integer value.
- **ValueError** – Provided value of Payload Length is out of range.
- **InconsistentArgumentsError** – Provided Addressing Format and Payload Length values cannot be used together.

**Returns**

The lowest value of DLC that enables to fit in provided Consecutive Frame packet data.

**Return type**

int

**classmethod `get_max_payload_size`(*addressing\_format*=None, *dmc*=None)**

Get the maximum size of a payload that can fit into Consecutive Frame data bytes.

**Parameters**

- **addressing\_format** (*Optional[uds.can.addressing\_format.CanAddressingFormat]*) – CAN addressing format that considered CAN packet uses. Leave None to get the result for CAN addressing format that does not use data bytes for carrying addressing information.
- **dmc** (*Optional[int]*) – DLC value of a CAN frame that carries a considered CAN Packet. Leave None to get the result for the greatest possible DLC value.

**Raises**

**InconsistentArgumentsError** – Consecutive Frame packet cannot use provided attributes according to ISO 15765.

**Returns**

The maximum number of payload bytes that could fit into a considered Consecutive Frame.

**Return type**

int

**classmethod validate\_frame\_data(*addressing\_format*, *raw\_frame\_data*)**

Validate whether data field of a CAN Packet carries a properly encoded Consecutive Frame.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **raw\_frame\_data** (*uds.utilities.RawBytesAlias*) – Raw data bytes of a CAN frame to validate.

**Raises**

- **ValueError** – Provided frame data of a CAN frames does not carry a Consecutive Frame CAN packet.
- **InconsistentArgumentsError** – Provided frame data of a CAN frames does not carry a properly encoded Consecutive Frame CAN packet.

**Return type**

None

**classmethod \_\_encode\_sn(*sequence\_number*)**

Create Consecutive Frame data bytes with CAN Packet Type and Sequence Number parameters.

**Parameters**

- sequence\_number** (*int*) – Value of the sequence number parameter.

**Returns**

Consecutive Frame data bytes containing CAN Packet Type and Sequence Number parameters.

**Return type**

*uds.utilities.RawBytesListAlias*

**uds.can.extended\_addressing\_information**

Implementation of Extended Addressing Information handler.

**Module Contents****Classes*****ExtendedCanAddressingInformation***

Addressing Information of CAN Entity (either server or client) that uses Extended Addressing format.

```
class uds.can.extended_addressing_information.ExtendedCanAddressingInformation(rx_physical,
                                tx_physical,
                                rx_functional,
                                tx_functional)
```

Bases: *uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation*



Addressing Information of CAN Entity (either server or client) that uses Extended Addressing format.

Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing functionally addressed communication.

**property addressing\_format: [uds.can.addressing\\_format.CanAddressingFormat](#)**

CAN Addressing format used.

#### Return type

[uds.can.addressing\\_format.CanAddressingFormat](#)

**AI\_DATA\_BYTES\_NUMBER: int = 1**

Number of CAN Frame data bytes that are used to carry Addressing Information.

**classmethod validate\_packet\_ai([addressing\\_type](#), [can\\_id=None](#), [target\\_address=None](#), [source\\_address=None](#), [address\\_extension=None](#))**

Validate Addressing Information parameters of a CAN packet that uses Extended Addressing format.

#### Parameters

- **addressing\_type** ([uds.transmission\\_attributes.AddressingType](#)) – Addressing type to validate.
- **can\_id** ([Optional\[int\]](#)) – CAN Identifier value to validate.
- **target\_address** ([Optional\[int\]](#)) – Target Address value to validate.
- **source\_address** ([Optional\[int\]](#)) – Source Address value to validate.
- **address\_extension** ([Optional\[int\]](#)) – Address Extension value to validate.

#### Raises

- **InconsistentArgumentsError** – Provided CAN ID value is incompatible with Extended Addressing format.
- **UnusedArgumentError** – Provided parameter is not supported by this Addressing format.

#### Returns

Normalized dictionary with the provided Addressing Information.

#### Return type

[uds.can.abstract\\_addressing\\_information.PacketAIParamsAlias](#)

## uds.can.first\_frame

Implementation specific for First Frame CAN packets.

This module contains implementation specific for *First Frame* packets - that includes *First Frame Data Length (FF\_DL)* parameter.

### Module Contents

#### Classes

<code>CanFirstFrameHandler</code>	Helper class that provides utilities for First Frame CAN Packets.
-----------------------------------	---

##### `class uds.can.first_frame.CanFirstFrameHandler`

Helper class that provides utilities for First Frame CAN Packets.

**FIRST\_FRAME\_N\_PCI: int = 1**

First Frame N\_PCI value.

**MAX\_SHORT\_FF\_DL\_VALUE: int = 4095**

Maximum value of *First Frame Data Length (FF\_DL)* for which short format of FF\_DL is used.

**MAX\_LONG\_FF\_DL\_VALUE: int = 4294967295**

Maximum value of *First Frame Data Length (FF\_DL)*.

**SHORT\_FF\_DL\_BYTES\_USED: int = 2**

Number of CAN Frame data bytes used to carry CAN Packet Type and First Frame Data Length (FF\_DL). This value is valid only for the short format using FF\_DL <= 4095.

**LONG\_FF\_DL\_BYTES\_USED: int = 6**

Number of CAN Frame data bytes used to carry CAN Packet Type and First Frame Data Length (FF\_DL). This value is valid only for the long format using FF\_DL > 4095.

**classmethod `create_valid_frame_data(*, addressing_format, payload, dlc, ff_dl, target_address=None, address_extension=None)`**

Create a data field of a CAN frame that carries a valid First Frame packet.

---

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output. Use `create_any_frame_data()` to create data bytes for a First Frame with any (also incompatible with ISO 15765) parameters values.

#### Parameters

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format used by a considered First Frame.
- **payload** (`uds.utilities.RawBytesAlias`) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **dlc** (`int`) – DLC value of a CAN frame that carries a considered CAN Packet.

- **ff\_dl** (*int*) – Value of First Frame Data Length parameter that is carried by a considered CAN packet.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. The value must only be provided if *addressing\_format* uses Target Address parameter.
- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. The value must only be provided if *addressing\_format* uses Address Extension parameter.

**Raises**

**InconsistentArgumentsError** – Provided *payload* contains incorrect number of bytes to fit them into a First Frame data field using provided parameters.

**Returns**

Raw bytes of CAN frame data for the provided First Frame packet information.

**Return type**

uds.utilities.RawBytesListAlias

```
classmethod create_any_frame_data(*, addressing_format, payload, dlc, ff_dl,
                                 long_ff_dl_format=False, target_address=None,
                                 address_extension=None)
```

Create a data field of a CAN frame that carries a First Frame packet.

---

**Note:** You can use this method to create First Frame data bytes with any (also inconsistent with ISO 15765) parameters values. It is recommended to use [create\\_valid\\_frame\\_data\(\)](#) to create data bytes for a First Frame with valid (compatible with ISO 15765) parameters values.

---

**Parameters**

- **addressing\_format** ([uds.can.addressing\\_format.CanAddressingFormat](#)) – CAN addressing format used by a considered First Frame.
- **payload** ([uds.utilities.RawBytesAlias](#)) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **dlc** (*int*) – DLC value of a CAN frame that carries a considered CAN Packet.
- **ff\_dl** (*int*) – Value of First Frame Data Length parameter that is carried by a considered CAN packet.
- **long\_ff\_dl\_format** (*bool*) – Information whether to use long or short format of First Frame Data Length.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. The value must only be provided if *addressing\_format* uses Target Address parameter.
- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. The value must only be provided if *addressing\_format* uses Address Extension parameter.

**Raises**

**InconsistentArgumentsError** – Provided *payload* contains incorrect number of bytes to fit them into a First Frame data field using provided parameters.

**Returns**

Raw bytes of CAN frame data for the provided First Frame packet information.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod `is_first_frame`(*addressing\_format*, *raw\_frame\_data*)**

Check if provided data bytes encodes a First Frame packet.

**Warning:** The method does not validate the content (e.g. FF\_DL parameter) of the packet.**Parameters**

- **`addressing_format`** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **`raw_frame_data`** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a CAN frame to check.

**Returns**

True if provided data bytes carries First Frame, False otherwise.

**Return type**

bool

**classmethod `decode_payload`(*addressing\_format*, *raw\_frame\_data*)**

Extract a value of payload from First Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.**Parameters**

- **`addressing_format`** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **`raw_frame_data`** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Returns**

Payload bytes of a diagnostic message carried by a considered First Frame.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod `decode_ff_dl`(*addressing\_format*, *raw\_frame\_data*)**

Extract a value of First Frame Data Length from First Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Raises**

**NotImplementedError** – There is missing implementation for the provided First Frame Data Length format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Extracted value of First Frame Data Length.

**Return type**

int

**classmethod get\_payload\_size(addressing\_format, dlc, long\_ff\_dl\_format=False)**

Get the size of a payload that can fit into First Frame data bytes.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format that considered CAN packet uses.
- **dlc** (int) – DLC value of a CAN frame that carries a considered CAN Packet.
- **long\_ff\_dl\_format** (bool) – Information whether to use long or short format of First Frame Data Length.

**Raises**

**ValueError** – First Frame packet cannot use provided attributes according to ISO 15765.

**Returns**

The maximum number of payload bytes that could fit into a considered First Frame.

**Return type**

int

**classmethod validate\_frame\_data(addressing\_format, raw\_frame\_data)**

Validate whether data field of a CAN Packet carries a properly encoded First Frame.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a CAN frame to validate.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a First Frame CAN packet.

**Return type**

None

**classmethod validate\_ff\_dl(ff\_dl, long\_ff\_dl\_format=None, dlc=None, addressing\_format=None)**

Validate a value of First Frame Data Length.

**Parameters**

- **ff\_dl** (int) – First Frame Data Length value to validate.

- **long\_ff\_dl\_format** (*Optional[bool]*) – Information whether long or short format of First Frame Data Length is used.
  - None - do not perform compatibility check with the FF\_DL format
  - True - perform compatibility check with long FF\_DL format
  - False - perform compatibility check with short FF\_DL format
- **dlc** (*Optional[int]*) – Value of DLC to use for First Frame Data Length value validation. Leave None if you do not want to validate whether First Frame shall be used in this case.
- **addressing\_format** (*Optional[uds.can.addressing\_format.CanAddressingFormat]*) – Value of CAN Addressing Format to use for First Frame Data Length value validation. Leave None if you do not want to validate whether First Frame shall be used in this case.

**Raises**

- **TypeError** – Provided value of First Frame Data Length is not integer.
- **ValueError** – Provided value of First Frame Data Length is out of range.
- **InconsistentArgumentsError** – Single Frame shall be used instead of First Frame to transmit provided number of payload bytes represented by FF\_DL value.

**Return type**

None

**classmethod \_\_extract\_ff\_dl\_data\_bytes(addressing\_format, raw\_frame\_data)**

Extract data bytes that carries CAN Packet Type and First Frame Data Length parameters.

**Warning:** This method does not check whether provided *raw\_frame\_data* actually contains First Frame.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **raw\_frame\_data** (*uds.utilities.RawBytesAlias*) – Raw data bytes of a considered CAN frame.

**Returns**

Extracted data bytes with CAN Packet Type and First Frame Data Length parameters.

**Return type***uds.utilities.RawBytesListAlias***classmethod \_\_encode\_valid\_ff\_dl(ff\_dl, dlc, addressing\_format)**

Create First Frame data bytes with CAN Packet Type and First Frame Data Length parameters.

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output. First Frame Data Length value validation (whether it is too low according to ISO 15765) is not performed though.

**Parameters**

- **ff\_dl** (*int*) – Value to put into a slot of First Frame Data Length.

- **dlc** (*int*) – Value of DLC to use for First Frame Data Length value validation.
- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – Value of CAN Addressing Format to use for First Frame Data Length value validation.

**Returns**

First Frame data bytes containing CAN Packet Type and First Frame Data Length parameters.

**Return type**

`uds.utilities.RawBytesListAlias`

**classmethod `__encode_any_ff_dl`(*ff\_dl*, *long\_ff\_dl\_format=False*)**

Create First Frame data bytes with CAN Packet Type and First Frame Data Length parameters.

---

**Note:** This method can be used to create any (also incompatible with ISO 15765 - Diagnostic on CAN) output.

---

**Parameters**

- **ff\_dl** (*int*) – Value to put into a slot of First Frame Data Length.
- **long\_ff\_dl\_format** (*bool*) – Information whether to use long or short format of First Frame Data Length.

**Raises**

- **ValueError** – Provided First Frame Data Length value is out of the parameter values range.
- **InconsistentArgumentsError** – Provided First Frame Data Length value cannot fit into the short format.

**Returns**

First Frame data bytes containing CAN Packet Type and First Frame Data Length parameters.

**Return type**

`uds.utilities.RawBytesListAlias`

**`uds.can.flow_control`**

Implementation specific for Flow Control CAN packets.

This module contains implementation of **Flow Control** packet attributes:

- *Flow Status*
- *Block Size*
- *Separation Time minimum (STmin)*

## Module Contents

### Classes

<code>CanFlowStatus</code>	Definition of Flow Status values.
<code>CanSTminTranslator</code>	Helper class that provides STmin values mapping.
<code>CanFlowControlHandler</code>	Helper class that provides utilities for Flow Control CAN Packets.

`exception uds.can.flow_control.UnrecognizedSTminWarning`

Bases: `Warning`

UnrecognizedSTminWarning

Warning about STmin value that is reserved and therefore not implemented.


---

**Note:** If you have a documentation that defines a meaning of `STmin` value for which this warning was raised, please create a request in [issues management system](#) and provide this documentation for us.

---

Initialize self. See `help(type(self))` for accurate signature.

`class uds.can.flow_control.CanFlowStatus`  
Bases: `uds.utilities.NibbleEnum`, `uds.utilities.ValidatedEnum`



Definition of Flow Status values.

*Flow Status (FS)* is a 4-bit value that enables controlling Consecutive Frames transmission.

Initialize self. See `help(type(self))` for accurate signature.

**ContinueToSend:** `CanFlowStatus = 0`

Asks to resume Consecutive Frames transmission.

**Wait:** `CanFlowStatus = 1`

Asks to pause Consecutive Frames transmission.

**Overflow:** `CanFlowStatus = 2`

Asks to abort transmission of a diagnostic message.

**class uds.can.flow\_control.CanSTminTranslator**

Helper class that provides STmin values mapping.

*Separation Time minimum (STmin)* informs about minimum time gap between a transmission of two following Consecutive Frames.

**MAX\_STMIN\_TIME: uds.utilities.TimeMillisecondsAlias = 127**

Maximal time value (in milliseconds) of STmin.

**MIN\_VALUE\_MS\_RANGE: int = 0**

Minimal value of STmin in milliseconds range (raw value and time value in milliseconds are equal).

**MAX\_VALUE\_MS\_RANGE: int = 127**

Maximal value of STmin in milliseconds range (raw value and time value in milliseconds are equal).

**MIN\_RAW\_VALUE\_100US\_RANGE: int = 241**

Minimal raw value of STmin in 100 microseconds range.

**MAX\_RAW\_VALUE\_100US\_RANGE: int = 249**

Maximal raw value of STmin in 100 microseconds range.

**MIN\_TIME\_VALUE\_100US\_RANGE: uds.utilities.TimeMillisecondsAlias = 0.1**

Minimal time value (in milliseconds) of STmin in 100 microseconds range.

**MAX\_TIME\_VALUE\_100US\_RANGE: uds.utilities.TimeMillisecondsAlias = 0.9**

Maximal time value (in milliseconds) of STmin in 100 microseconds range.

**\_\_FLOATING\_POINT\_ACCURACY: int = 10**

Accuracy used for floating point values (rounding is necessary due to float operation in python).

**classmethod decode(raw\_value)**

Map raw value of STmin into time value.

---

**Note:** According to ISO 15765-2, if a raw value of STmin that is not recognized by its recipient, then the longest STmin time value (0x7F = 127 ms) shall be used instead.

---

**Parameters**

`raw_value (int)` – Raw value of STmin.

**Returns**

STmin time in milliseconds.

**Return type**

`uds.utilities.TimeMillisecondsAlias`

**classmethod encode(time\_value)**

Map time value of STmin into raw value.

**Parameters**

`time_value (uds.utilities.TimeMillisecondsAlias)` – STmin time in milliseconds.

**Raises**

- `TypeError` – Provided value is not time in milliseconds.

- **ValueError** – Value out of supported range.

**Returns**

Raw value of STmin.

**Return type**

int

**classmethod `is_time_value`(*value*)**

Check if provided value is a valid time value of STmin.

**Parameters**

**value** (*uds.utilities.TimeMillisecondsAlias*) – Value to check.

**Returns**

True if provided value is a valid time value of STmin, False otherwise.

**Return type**

bool

**classmethod `_is_ms_value`(*value*)**

Check if provided argument is STmin time value in milliseconds.

**Parameters**

**value** (*uds.utilities.TimeMillisecondsAlias*) – Value to check.

**Returns**

True if provided valid value of STmin time in milliseconds, False otherwise.

**Return type**

bool

**classmethod `_is_100us_value`(*value*)**

Check if provided argument is STmin time value in 100 microseconds.

**Parameters**

**value** (*uds.utilities.TimeMillisecondsAlias*) – Value to check.

**Returns**

True if provided valid value of STmin time in 100 microseconds, False otherwise.

**Return type**

bool

**class `uds.can.flow_control.CanFlowControlHandler`**

Helper class that provides utilities for Flow Control CAN Packets.

**FLOW\_CONTROL\_N\_PCI: int = 3**

N\_PCI value of Flow Control.

**FS\_BYTES\_USED: int = 3**

Number of CAN Frame data bytes used to carry CAN Packet Type, Flow Status, Block Size and STmin.

**BS\_BYTE\_POSITION: int = 1**

Position of a data byte with *Block Size* parameter.

**STMIN\_BYTE\_POSITION: int = 2**

Position of a data byte with *STmin* parameter.

**classmethod `create_valid_frame_data`(\**args*, *addressing\_format*, *flow\_status*, *block\_size=None*, *st\_min=None*, *dlc=None*, *filler\_byte=DEFAULT\_FILLER\_BYTE*, *target\_address=None*, *address\_extension=None*)**

Create a data field of a CAN frame that carries a valid Flow Control packet.

---

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output. Use `create_any_frame_data()` to create data bytes for a Flow Control with any (also incompatible with ISO 15765) parameters values.

---

#### Parameters

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format used by a considered Flow Control.
- **flow\_status** (`CanFlowStatus`) – Value of Flow Status parameter.
- **block\_size** (`Optional[int]`) – Value of Block Size parameter. This parameter is only required with ContinueToSend Flow Status, leave None otherwise.
- **st\_min** (`Optional[int]`) – Value of Separation Time minimum (STmin) parameter. This parameter is only required with ContinueToSend Flow Status, leave None otherwise.
- **dlc** (`Optional[int]`) – DLC value of a CAN frame that carries a considered CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill the unused data bytes.
- **filler\_byte** (`int`) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (`Optional[int]`) – Target Address value carried by this CAN Packet. The value must only be provided if `addressing_format` uses Target Address parameter.
- **address\_extension** (`Optional[int]`) – Address Extension value carried by this CAN packet. The value must only be provided if `addressing_format` uses Address Extension parameter.

#### Raises

`InconsistentArgumentsError` – Invalid DLC value was provided.

#### Returns

Raw bytes of CAN frame data for the provided Flow Control packet information.

#### Return type

`uds.utilities.RawBytesListAlias`

```
classmethod create_any_frame_data(*, addressing_format, flow_status, dlc, block_size=None,
                                 st_min=None, filler_byte=DEFAULT_FILLER_BYTE,
                                 target_address=None, address_extension=None)
```

Create a data field of a CAN frame that carries a Flow Control packet.

---

**Note:** You can use this method to create Flow Control data bytes with any (also inconsistent with ISO 15765) parameters values. It is recommended to use `create_valid_frame_data()` to create data bytes for a Flow Control with valid (compatible with ISO 15765) parameters values.

---

#### Parameters

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN addressing format used by a considered Flow Control.
- **flow\_status** (`CanFlowStatus`) – Value of Flow Status parameter.
- **st\_min** (`Optional[int]`) – Value of Separation Time minimum (STmin) parameter. Leave None to not insert this parameter in a Flow Control data bytes.
- **block\_size** (`Optional[int]`) – Value of Block Size parameter. Leave None to not insert this parameter in a Flow Control data bytes.
- **dlc** (`int`) – DLC value of a CAN frame that carries a considered CAN Packet.
- **filler\_byte** (`int`) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (`Optional[int]`) – Target Address value carried by this CAN Packet. The value must only be provided if *addressing\_format* uses Target Address parameter.
- **address\_extension** (`Optional[int]`) – Address Extension value carried by this CAN packet. The value must only be provided if *addressing\_format* uses Address Extension parameter.

**Raises**

`InconsistentArgumentsError` – DLC value is too small.

**Returns**

Raw bytes of CAN frame data for the provided Flow Control packet information.

**Return type**

`uds.utilities.RawBytesListAlias`

**classmethod `is_flow_control`(*addressing\_format*, *raw\_frame\_data*)**

Check if provided data bytes encodes a Flow Control packet.

**Warning:** The method does not validate the content of the provided frame data bytes. Only, *CAN Packet Type (N\_PCI)* parameter is checked whether contain Flow Control N\_PCI value.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a CAN frame to check.

**Returns**

True if provided data bytes carries Flow Control, False otherwise.

**Return type**

`bool`

**classmethod `decode_flow_status`(*addressing\_format*, *raw\_frame\_data*)**

Extract Flow Status value from Flow Control data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a Flow Control CAN packet.

**Returns**

Flow Status value carried by a considered Flow Control.

**Return type**

`CanFlowStatus`

**classmethod decode\_block\_size(addressing\_format, raw\_frame\_data)**

Extract Block Size value from Flow Control data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a Flow Control CAN packet with Continue To Send Flow Status.

**Returns**

Block Size value carried by a considered Flow Control.

**Return type**

`int`

**classmethod decode\_st\_min(addressing\_format, raw\_frame\_data)**

Extract STmin value from Flow Control data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a Flow Control CAN packet with Continue To Send Flow Status.

**Returns**

Separation Time minimum (STmin) value carried by a considered Flow Control.

**Return type**

int

**classmethod get\_min\_dlc(*addressing\_format*)**

Get the minimum value of a CAN frame DLC to carry a Flow Control packet.

**Parameters**

- **addressing\_format** ([uds.can.addressing\\_format.CanAddressingFormat](#)) – CAN addressing format that considered CAN packet uses.

**Returns**

The lowest value of DLC that enables to fit in provided Flow Control packet data.

**Return type**

int

**classmethod validate\_frame\_data(*addressing\_format*, *raw\_frame\_data*)**

Validate whether data field of a CAN Packet carries a properly encoded Flow Control.

**Parameters**

- **addressing\_format** ([uds.can.addressing\\_format.CanAddressingFormat](#)) – CAN Addressing Format used.
- **raw\_frame\_data** ([uds.utilities.RawBytesAlias](#)) – Raw data bytes of a CAN frame to validate.

**Raises**

**ValueError** – Provided frame data of a CAN frames does not carry a properly encoded Flow Control CAN packet.

**Return type**

None

**classmethod \_\_encode\_valid\_flow\_status(*flow\_status*, *block\_size=None*, *st\_min=None*, *filler\_byte=DEFAULT\_FILLER\_BYTE*)**

Create Flow Control data bytes with CAN Packet Type and Flow Status, Block Size and STmin parameters.

---

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output.

---

**Parameters**

- **flow\_status** ([CanFlowStatus](#)) – Value of Flow Status parameter.
- **block\_size** (*Optional[int]*) – Value of Block Size parameter. This parameter is only required with ContinueToSend Flow Status, leave None otherwise.
- **st\_min** (*Optional[int]*) – Value of Separation Time minimum (STmin) parameter. This parameter is only required with ContinueToSend Flow Status, leave None otherwise.
- **filler\_byte** (*int*) – Filler Byte value to use for CAN Frame Data Padding.

**Returns**

Flow Control data bytes with CAN Packet Type and Flow Status, Block Size and STmin parameters.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod** `__encode_any_flow_status(flow_status, block_size=None, st_min=None)`

Create Flow Control data bytes with CAN Packet Type and Flow Status, Block Size and STmin parameters.

---

**Note:** This method can be used to create any (also incompatible with ISO 15765 - Diagnostic on CAN) output.

---

**Parameters**

- **flow\_status** (*int*) – Value of Flow Status parameter.
- **block\_size** (*Optional[int]*) – Value of Block Size parameter. Leave None to skip the Block Size byte in the output.
- **st\_min** (*Optional[int]*) – Value of Separation Time minimum (STmin) parameter. Leave None to skip the STmin byte in the output.

**Returns**

Flow Control data bytes with CAN Packet Type and Flow Status, Block Size and STmin parameters. Some of the parameters might be missing if certain arguments were provided.

**Return type**

uds.utilities.RawBytesListAlias

## uds.can.frame\_fields

Implementation for CAN frame fields that are influenced by UDS.

### Handlers for *CAN Frame* fields:

- CAN Identifier
- DLC
- Data

## Module Contents

### Classes

<code>CanIdHandler</code>	Helper class that provides utilities for CAN Identifier field.
<code>CanDlcHandler</code>	Helper class that provides utilities for CAN Data Length Code field.

## Attributes

<code>DEFAULT_FILLER_BYTE</code>	Default value of Filler Byte.
----------------------------------	-------------------------------

`uds.can.frame_fields.DEFAULT_FILLER_BYTE: int = 204`

Default value of Filler Byte. Filler Bytes are used for *CAN Frame Data Padding*. ... note:: The value is specified by ISO 15765-2:2016 (chapter 10.4.2.1).

`class uds.can.frame_fields.CanIdHandler`

Helper class that provides utilities for CAN Identifier field.


CAN Identifier (CAN ID) is a CAN frame field that informs about a sender and a content of CAN frames.

**CAN bus supports two formats of CAN ID:**

- Standard (11-bit Identifier)
- Extended (29-bit Identifier)

`class CanIdAIAlias`

Bases: TypedDict

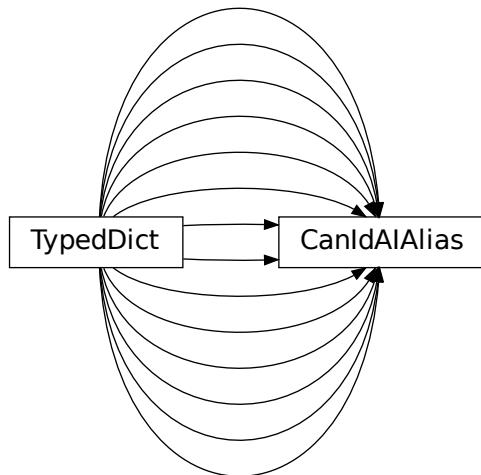

Alias of *Addressing Information* that is carried by CAN Identifier.

Initialize self. See `help(type(self))` for accurate signature.

`addressing_type: uds.transmission_attributes.AddressingType | None`

`target_address: int | None`

`source_address: int | None`

`MIN_STANDARD_VALUE: int = 0`

Minimum value of Standard (11-bit) CAN ID.

**MAX\_STANDARD\_VALUE: int**

Maximum value of Standard (11-bit) CAN ID.

**MIN\_EXTENDED\_VALUE: int**

Minimum value of Extended (29-bit) CAN ID.

**MAX\_EXTENDED\_VALUE: int**

Maximum value of Extended (29-bit) CAN ID.

**NORMAL\_FIXED\_PHYSICAL\_ADDRESSING\_OFFSET: int = 416940032**

Minimum value of physically addressed CAN ID in Normal Fixed Addressing format.

**NORMAL\_FIXED\_FUNCTIONAL\_ADDRESSING\_OFFSET: int = 417005568**

Minimum value of functionally addressed CAN ID in Normal Fixed Addressing format.

**MIXED\_29BIT\_PHYSICAL\_ADDRESSING\_OFFSET: int = 416153600**

Minimum value of physically addressed CAN ID in Mixed 29-bit Addressing format.

**MIXED\_29BIT\_FUNCTIONAL\_ADDRESSING\_OFFSET: int = 416088064**

Minimum value of functionally addressed CAN ID in Mixed 29-bit Addressing format.

**ADDRESSING\_TYPE\_NAME: str = 'addressing\_type'**

Name of *Addressing Type* parameter in Addressing Information.

**TARGET\_ADDRESS\_NAME: str = 'target\_address'**

Name of Target Address parameter in Addressing Information.

**SOURCE\_ADDRESS\_NAME: str = 'source\_address'**

Name of Source Address parameter in Addressing Information.

**classmethod decode\_can\_id(addressing\_format, can\_id)**

Extract Addressing Information out of CAN ID.

**Warning:** This methods might not extract any Addressing Information from the provided CAN ID as some of these information are system specific.

For example, Addressing Type (even though it always depends on CAN ID value) will not be decoded when either Normal 11bit, Extended or Mixed 11bit addressing format is used as the Addressing Type (in such case) depends on system specific behaviour.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – Addressing format used.
- **can\_id** (`int`) – CAN ID from which Addressing Information to be extracted.

**Raises**

**NotImplementedError** – There is missing implementation for the provided Addressing Format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Dictionary with Addressing Information decoded out of the provided CAN ID.

**Return type**

`CanIdAIAlias`

**classmethod decode\_normal\_fixed\_addressed\_can\_id(*can\_id*)**

Extract Addressing Information out of CAN ID for Normal Fixed CAN Addressing format.

**Parameters**

**can\_id** (*int*) – CAN ID from which Addressing Information to be extracted.

**Raises**

- **ValueError** – Provided CAN ID is not compatible with Normal Fixed Addressing format.
- **NotImplementedError** – There is missing implementation for the provided CAN ID. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Dictionary with Addressing Information decoded out of the provided CAN ID.

**Return type**

*CanIdAIAlias*

**classmethod decode\_mixed\_addressed\_29bit\_can\_id(*can\_id*)**

Extract Addressing Information out of CAN ID for Mixed 29-bit CAN Addressing format.

**Parameters**

**can\_id** (*int*) – CAN ID from which Addressing Information to be extracted.

**Raises**

- **ValueError** – Provided CAN ID is not compatible with Mixed 29-bit Addressing format.
- **NotImplementedError** – There is missing implementation for the provided CAN ID. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Dictionary with Addressing Information decoded out of the provided CAN ID.

**Return type**

*CanIdAIAlias*

**classmethod encode\_normal\_fixed\_addressed\_can\_id(*addressing\_type*, *target\_address*, *source\_address*)**

Generate CAN ID value for Normal Fixed CAN Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type used.
- **target\_address** (*int*) – Target address value to use.
- **source\_address** (*int*) – Source address value to use.

**Raises**

**NotImplementedError** – There is missing implementation for the provided Addressing Type. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Value of CAN ID (compatible with Normal Fixed Addressing Format) that was generated from the provided values.

**Return type**

*int*

```
classmethod encode_mixed_addressed_29bit_can_id(addressing_type, target_address,
                                                source_address)
```

Generate CAN ID value for Mixed 29-bit CAN Addressing format.

#### Parameters

- **addressing\_type** (`uds.transmission_attributes.AddressingType`) – Addressing type used.
- **target\_address** (`int`) – Target address value to use.
- **source\_address** (`int`) – Source address value to use.

#### Raises

**NotImplementedError** – There is missing implementation for the provided Addressing Type. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

#### Returns

Value of CAN ID (compatible with Mixed 29-bit Addressing Format) that was generated from the provided values.

#### Return type

`int`

```
classmethod is_compatible_can_id(can_id, addressing_format, addressing_type=None)
```

Check if the provided value of CAN ID is compatible with addressing format used.

#### Parameters

- **can\_id** (`int`) – Value to check.
- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – Addressing format used.
- **addressing\_type** (*Optional* [`uds.transmission_attributes.AddressingType`]) – Addressing type for which consistency check to be performed. Leave None to not perform consistency check with Addressing Type.

#### Raises

**NotImplementedError** – There is missing implementation for the provided Addressing Format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

#### Returns

True if CAN ID value is compatible with provided addressing values, False otherwise.

#### Return type

`bool`

```
classmethod is_normal_11bit_addressed_can_id(can_id)
```

Check if the provided value of CAN ID is compatible with Normal 11-bit Addressing format.

#### Parameters

**can\_id** (`int`) – Value to check.

#### Returns

True if value is a valid CAN ID for Normal 11-bit Addressing format, False otherwise.

#### Return type

`bool`

**classmethod `is_normal_fixed_addressed_can_id(can_id, addressing_type=None)`**

Check if the provided value of CAN ID is compatible with Normal Fixed Addressing format.

**Parameters**

- **can\_id (int)** – Value to check.
- **addressing\_type** (*Optional [uds.transmission\_attributes.AddressingType]*) – Addressing type for which consistency check to be performed. Leave None to not perform consistency check with Addressing Type.

**Returns**

True if value is a valid CAN ID for Normal Fixed Addressing format and consistent with the provided Addressing Type, False otherwise.

**Return type**

bool

**classmethod `is_extended_addressed_can_id(can_id)`**

Check if the provided value of CAN ID is compatible with Extended Addressing format.

**Parameters**

- **can\_id (int)** – Value to check.

**Returns**

True if value is a valid CAN ID for Extended Addressing format, False otherwise.

**Return type**

bool

**classmethod `is_mixed_11bit_addressed_can_id(can_id)`**

Check if the provided value of CAN ID is compatible with Mixed 11-bit Addressing format.

**Parameters**

- **can\_id (int)** – Value to check.

**Returns**

True if value is a valid CAN ID for Mixed 11-bit Addressing format, False otherwise.

**Return type**

bool

**classmethod `is_mixed_29bit_addressed_can_id(can_id, addressing_type=None)`**

Check if the provided value of CAN ID is compatible with Mixed 29-bit Addressing format.

**Parameters**

- **can\_id (int)** – Value to check.
- **addressing\_type** (*Optional [uds.transmission\_attributes.AddressingType]*) – Addressing type for which consistency check to be performed. Leave None to not perform consistency check with Addressing Type.

**Returns**

True if value is a valid CAN ID for Mixed 29-bit Addressing format and consistent with the provided Addressing Type, False otherwise.

**Return type**

bool

**classmethod `is_can_id(value)`**

Check if the provided value is either Standard (11-bit) or Extended (29-bit) CAN ID.

**Parameters**

**value** (*int*) – Value to check.

**Returns**

True if value is a valid CAN ID, False otherwise.

**Return type**

bool

**classmethod** `is_standard_can_id(can_id)`

Check if the provided value is Standard (11-bit) CAN ID.

**Parameters**

**can\_id** (*int*) – Value to check.

**Returns**

True if value is a valid 11-bit CAN ID, False otherwise.

**Return type**

bool

**classmethod** `is_extended_can_id(can_id)`

Check if the provided value is Extended (29-bit) CAN ID.

**Parameters**

**can\_id** (*int*) – Value to check.

**Returns**

True if value is a valid 29-bit CAN ID, False otherwise.

**Return type**

bool

**classmethod** `validate_can_id(value, extended_can_id=None)`

Validate whether provided value is either Standard or Extended CAN ID.

**Parameters**

- **value** (*int*) – Value to validate.
- **extended\_can\_id** (*Optional[bool]*) – Flag whether to perform consistency check with CAN ID format.
  - None - does not check the format of the value
  - True - verify that the value uses Extended (29-bit) CAN ID format
  - False - verify that the value uses Standard (11-bit) CAN ID format

**Raises**

- **TypeError** – Provided value is not int type.
- **ValueError** – Provided value is out of CAN Identifier values range.

**Return type**

None

**class** `uds.can.frame_fields.CanDlcHandler`

Helper class that provides utilities for CAN Data Length Code field.

CAN Data Length Code (DLC) is a CAN frame field that informs about number of data bytes carried by CAN frames.

**CAN DLC supports two values ranges:**

- 0x0-0x8 - linear range which is supported by CLASSICAL CAN and CAN FD
- 0x9-0xF - discrete range which is supported by CAN FD only

`__DLC_VALUES: Tuple[int, Ellipsis]`

`__DATA_BYTES_NUMBERS: Tuple[int, Ellipsis] = (0, 1, 2, 3, 4, 5, 6, 7, 8, 12, 16, 20, 24, 32, 48, 64)`

`__DLC_MAPPING: Dict[int, int]`

`__DATA_BYTES_NUMBER_MAPPING: Dict[int, int]`

`__DLC_SPECIFIC_FOR_CAN_FD: Set[int]`

`MIN_DATA_BYTES_NUMBER: int`

Minimum number of data bytes in a CAN frame.

`MAX_DATA_BYTES_NUMBER: int`

Maximum number of data bytes in a CAN frame.

`MIN_DLC_VALUE: int`

Minimum value of DLC parameter.

`MAX_DLC_VALUE: int`

Maximum value of DLC parameter.

`MIN_BASE_UDS_DLC: int = 8`

Minimum CAN DLC value that can be used for UDS communication. Lower values of DLC are only allowed when [CAN Frame Data Optimization](#) is used.

`classmethod decode_dlc(dlc)`

Map a value of CAN DLC into a number of data bytes.

**Parameters**

`dlc (int)` – Value of CAN DLC.

**Returns**

Number of data bytes in a CAN frame that is represented by provided DLC value.

**Return type**

`int`

`classmethod encode_dlc(data_bytes_number)`

Map a number of data bytes in a CAN frame into DLC value.

**Parameters**

`data_bytes_number (int)` – Number of data bytes in a CAN frame.

**Returns**

DLC value of a CAN frame that represents provided number of data bytes.

**Return type**

`int`

`classmethod get_min_dlc(data_bytes_number)`

Get a minimum value of CAN DLC that is required to carry the provided number of data bytes in a CAN frame.

**Parameters**

`data_bytes_number (int)` – Number of data bytes in a CAN frame.

**Returns**

Minimum CAN DLC value that is required to carry provided number of data bytes in a CAN frame.

**Return type**

int

**classmethod** `is_can_fd_specific_dlc(dlc)`

Check whether the provided DLC value is CAN FD specific.

**Parameters**

`dmc` (`int`) – Value of DLC to check.

**Returns**

True if provided DLC value is CAN FD specific, False otherwise.

**Return type**

bool

**classmethod** `validate_dlc(value)`

Validate whether the provided value is a valid value of CAN DLC.

**Parameters**

`value` (`int`) – Value to validate.

**Raises**

- **TypeError** – Provided values is not int type.
- **ValueError** – Provided value is not a valid DLC value.

**Return type**

None

**classmethod** `validate_data_bytes_number(value, exact_value=True)`

Validate whether provided value is a valid number of data bytes that might be carried a CAN frame.

**Parameters**

- **value** (`int`) – Value to validate.
- **exact\_value** (`bool`) – Informs whether the value must be the exact number of data bytes in a CAN frame.
  - True - provided value must be the exact number of data bytes to be carried by a CAN frame.
  - False - provided value must be a number of data bytes that could be carried by a CAN frame (*CAN Frame Data Padding* is allowed).

**Raises**

- **TypeError** – Provided values is not int type.
- **ValueError** – Provided value is not number of data bytes that matches the criteria.

**Return type**

None

## uds.can.mixed\_addressing\_information

Implementation of Mixed Addressing Information handlers.

### Module Contents

#### Classes

<i>Mixed11BitCanAddressingInformation</i>	Addressing Information of CAN Entity (either server or client) that uses Mixed 11-bit Addressing format.
<i>Mixed29BitCanAddressingInformation</i>	Addressing Information of CAN Entity (either server or client) that uses Mixed 29-bit Addressing format.

```
class uds.can.mixed_addressing_information.Mixed11BitCanAddressingInformation(rx_physical,  
                                tx_physical,  
                                rx_functional,  
                                tx_functional)
```

Bases: *uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation*



Addressing Information of CAN Entity (either server or client) that uses Mixed 11-bit Addressing format.

Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing functionally addressed communication.

**property addressing\_format: [uds.can.addressing\\_format.CanAddressingFormat](#)**

CAN Addressing format used.

#### Return type

*uds.can.addressing\_format.CanAddressingFormat*

**AI\_DATA\_BYTES\_NUMBER: int = 1**

Number of CAN Frame data bytes that are used to carry Addressing Information.

```
classmethod validate_packet_ai(addressing_type, can_id=None, target_address=None,  
                               source_address=None, address_extension=None)
```

Validate Addressing Information parameters of a CAN packet that uses Mixed 11-bit Addressing format.

#### Parameters

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type to validate.
- **can\_id** (*Optional[int]*) – CAN Identifier value to validate.
- **target\_address** (*Optional[int]*) – Target Address value to validate.
- **source\_address** (*Optional[int]*) – Source Address value to validate.
- **address\_extension** (*Optional[int]*) – Address Extension value to validate.

#### Raises

- **InconsistentArgumentsError** – Provided CAN ID value is incompatible with Mixed 11-bit Addressing format.
- **UnusedArgumentError** – Provided parameter is not supported by this Addressing format.

#### Returns


Normalized dictionary with the provided Addressing Information.

#### Return type

*uds.can.abstract\_addressing\_information.PacketAIParamsAlias*

```
class uds.can.mixed_addressing_information.Mixed29BitCanAddressingInformation(rx_physical,  
                                tx_physical,  
                                rx_functional,  
                                tx_functional)
```

Bases: *uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation*



Addressing Information of CAN Entity (either server or client) that uses Mixed 29-bit Addressing format.

Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** (*InputAIParamsAlias*) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** (*InputAIParamsAlias*) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** (*InputAIParamsAlias*) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** (*InputAIParamsAlias*) – Addressing Information parameters used for outgoing functionally addressed communication.

---

**property addressing\_format: `uds.can.addressing_format.CanAddressingFormat`**

CAN Addressing format used.

**Return type**

`uds.can.addressing_format.CanAddressingFormat`

**AI\_DATA\_BYTES\_NUMBER: int = 1**

Number of CAN Frame data bytes that are used to carry Addressing Information.

**classmethod validate\_packet\_ai(`addressing_type`, `can_id=None`, `target_address=None`, `source_address=None`, `address_extension=None`)**

Validate Addressing Information parameters of a CAN packet that uses Mixed 29-bit Addressing format.

**Parameters**

- **addressing\_type** (`uds.transmission_attributes.AddressingType`) – Addressing type to validate.
- **can\_id** (`Optional[int]`) – CAN Identifier value to validate.
- **target\_address** (`Optional[int]`) – Target Address value to validate.
- **source\_address** (`Optional[int]`) – Source Address value to validate.
- **address\_extension** (`Optional[int]`) – Address Extension value to validate.

**Raises**

`InconsistentArgumentsError` – Provided Target Address, Source Address or CAN ID values are incompatible with each other or Mixed 29-bit Addressing format.

**Returns**

Normalized dictionary with the provided Addressing Information.

**Return type**

`uds.can.abstract_addressing_information.PacketAIParamsAlias`

## `uds.can.normal_addressing_information`

Implementation of Normal Addressing Information handlers.

### Module Contents

#### Classes


<code>Normal11BitCanAddressingInformation</code>	Addressing Information of CAN Entity (either server or client) that uses Normal 11-bit Addressing format.
--	---

| `NormalFixedCanAddressingInformation` | Addressing Information of CAN Entity (either server or client) that uses Normal Fixed Addressing format. |

---

**class uds.can.normal\_addressing\_information.Normal11BitCanAddressingInformation(`rx_physical`,  
`tx_physical`,  
`rx_functional`,  
`tx_functional`)**

Bases: `uds.can.abstract_addressing_information.AbstractCanAddressingInformation`



Addressing Information of CAN Entity (either server or client) that uses Normal 11-bit Addressing format.

Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** ([InputAIParamsAlias](#)) – Addressing Information parameters used for outgoing functionally addressed communication.

**property addressing\_format: [uds.can.addressing\\_format.CanAddressingFormat](#)**

CAN Addressing format used.

#### Return type

[uds.can.addressing\\_format.CanAddressingFormat](#)

**AI\_DATA\_BYTES\_NUMBER: int = 0**

Number of CAN Frame data bytes that are used to carry Addressing Information.

**classmethod validate\_packet\_ai([addressing\\_type](#), [can\\_id=None](#), [target\\_address=None](#), [source\\_address=None](#), [address\\_extension=None](#))**

Validate Addressing Information parameters of a CAN packet that uses Normal 11-bit Addressing format.

#### Parameters

- **addressing\_type** ([uds.transmission\\_attributes.AddressingType](#)) – Addressing type to validate.
- **can\_id** ([Optional\[int\]](#)) – CAN Identifier value to validate.
- **target\_address** ([Optional\[int\]](#)) – Target Address value to validate.
- **source\_address** ([Optional\[int\]](#)) – Source Address value to validate.
- **address\_extension** ([Optional\[int\]](#)) – Address Extension value to validate.

#### Raises

- **InconsistentArgumentsError** – Provided CAN ID value is incompatible with Normal 11-bit Addressing format.
- **UnusedArgumentError** – Provided parameter is not supported by this Addressing format.

#### Returns

Normalized dictionary with the provided Addressing Information.

#### Return type

[uds.can.abstract\\_addressing\\_information.PacketAIParamsAlias](#)

```
class uds.can.normal_addressing_information.NormalFixedCanAddressingInformation(rx_physical,
                                tx_physical,
                                rx_functional,
                                tx_functional)
```

Bases: `uds.can.abstract_addressing_information.AbstractCanAddressingInformation`



Addressing Information of CAN Entity (either server or client) that uses Normal Fixed Addressing format.

Configure Addressing Information of a CAN Entity.

#### Parameters

- **rx\_physical** (`InputAIParamsAlias`) – Addressing Information parameters used for incoming physically addressed communication.
- **tx\_physical** (`InputAIParamsAlias`) – Addressing Information parameters used for outgoing physically addressed communication.
- **rx\_functional** (`InputAIParamsAlias`) – Addressing Information parameters used for incoming functionally addressed communication.
- **tx\_functional** (`InputAIParamsAlias`) – Addressing Information parameters used for outgoing functionally addressed communication.

**property addressing\_format: `uds.can.addressing_format.CanAddressingFormat`**

CAN Addressing format used.

#### Return type

`uds.can.addressing_format.CanAddressingFormat`

**AI\_DATA\_BYTES\_NUMBER: int = 0**

Number of CAN Frame data bytes that are used to carry Addressing Information.

**classmethod validate\_packet\_ai(addressing\_type, can\_id=None, target\_address=None, source\_address=None, address\_extension=None)**

Validate Addressing Information parameters of a CAN packet that uses Normal Fixed Addressing format.

#### Parameters

- **addressing\_type** (`uds.transmission_attributes.AddressingType`) – Addressing type to validate.
- **can\_id** (`Optional[int]`) – CAN Identifier value to validate.
- **target\_address** (`Optional[int]`) – Target Address value to validate.
- **source\_address** (`Optional[int]`) – Source Address value to validate.
- **address\_extension** (`Optional[int]`) – Address Extension value to validate.

#### Raises

- **InconsistentArgumentsError** – Provided Target Address, Source Address or CAN ID values are incompatible with each other or Normal Fixed Addressing format.

- **UnusedArgumentError** – Provided parameter is not supported by this Addressing format.

**Returns**

Normalized dictionary with the provided Addressing Information.

**Return type**

*uds.can.abstract\_addressing\_information.PacketAIParamsAlias*

## **uds.can.single\_frame**

Implementation specific for Single Frame CAN packets.

This module contains implementation specific for *Single Frame* packets - that includes *Single Frame Data Length (SF\_DL)* parameter.

### **Module Contents**

#### **Classes**

<i>CanSingleFrameHandler</i>	Helper class that provides utilities for Single Frame CAN Packets.
------------------------------	--

##### **class uds.can.single\_frame.CanSingleFrameHandler**

Helper class that provides utilities for Single Frame CAN Packets.

###### **SINGLE\_FRAME\_N\_PCI: int = 0**

N\_PCI value of Single Frame.

###### **MAX\_DLC\_VALUE\_SHORT\_SF\_DL: int = 8**

Maximum value of DLC for which short *Single Frame Data Length* format shall be used.

###### **SHORT\_SF\_DL\_BYTES\_USED: int = 1**

Number of CAN Frame data bytes used to carry CAN Packet Type and Single Frame Data Length (SF\_DL). This value is valid only for the short format using DLC <= 8.

###### **LONG\_SF\_DL\_BYTES\_USED: int = 2**

Number of CAN Frame data bytes used to carry CAN Packet Type and Single Frame Data Length (SF\_DL). This value is valid only for the long format using DLC > 8.

###### **classmethod create\_valid\_frame\_data(\*, addressing\_format, payload, dlc=None, filler\_byte=DEFAULT\_FILLER\_BYTE, target\_address=None, address\_extension=None)**

Create a data field of a CAN frame that carries a valid Single Frame packet.

---

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output. Use [\*create\\_any\\_frame\\_data\(\)\*](#) to create data bytes for a Single Frame with any (also incompatible with ISO 15765) parameters values.

---

#### **Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN addressing format used by a considered Single Frame.

- **payload** (*uds.utilities.RawBytesAlias*) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **dlc** (*Optional[int]*) – DLC value of a CAN frame that carries a considered CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill the unused data bytes.
- **filler\_byte** (*int*) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. The value must only be provided if *addressing\_format* uses Target Address parameter.
- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. The value must only be provided if *addressing\_format* uses Address Extension parameter.

**Raises**

**InconsistentArgumentsError** – Provided *payload* contains invalid number of bytes to fit it into a properly defined Single Frame data field.

**Returns**

Raw bytes of CAN frame data for the provided Single Frame packet information.

**Return type**

*uds.utilities.RawBytesListAlias*

```
classmethod create_any_frame_data(*, addressing_format, payload, dlc, sf_dl_short,
                                 sf_dl_long=None, filler_byte=DEFAULT_FILLER_BYTE,
                                 target_address=None, address_extension=None)
```

Create a data field of a CAN frame that carries a Single Frame packet.

---

**Note:** You can use this method to create Single Frame data bytes with any (also inconsistent with ISO 15765) parameters values. It is recommended to use [create\\_valid\\_frame\\_data\(\)](#) to create data bytes for a Single Frame with valid (compatible with ISO 15765) parameters values.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN addressing format used by a considered Single Frame.
- **payload** (*uds.utilities.RawBytesAlias*) – Payload of a diagnostic message that is carried by a considered CAN packet.
- **dlc** (*int*) – DLC value of a CAN frame that carries a considered CAN Packet.
- **sf\_dl\_short** (*int*) – Value to put into a slot of Single Frame Data Length in short format.
- **sf\_dl\_long** (*Optional[int]*) – Value to put into a slot of Single Frame Data Length in long format. Leave None to use short (1-byte-long) format of Single Frame Data Length.
- **filler\_byte** (*int*) – Filler Byte value to use for CAN Frame Data Padding.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. The value must only be provided if *addressing\_format* uses Target Address parameter.

- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. The value must only be provided if *addressing\_format* uses Address Extension parameter.

**Raises**

**InconsistentArgumentsError** – Provided *payload* contains too many bytes to fit it into a Single Frame data field.

**Returns**

Raw bytes of CAN frame data for the provided Single Frame packet information.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod `is_single_frame`(*addressing\_format*, *raw\_frame\_data*)**

Check if provided data bytes encodes a Single Frame packet.

**Warning:** The method does not validate the content (e.g. SF\_DL parameter) of the provided frame data bytes. Only, [CAN Packet Type \(N\\_PCI\)](#) parameter is checked whether contain Single Frame N\_PCI value.

**Parameters**

- **addressing\_format** ([uds.can.addressing\\_format.CanAddressingFormat](#)) – CAN Addressing Format used.
- **raw\_frame\_data** ([uds.utilities.RawBytesAlias](#)) – Raw data bytes of a CAN frame to check.

**Returns**

True if provided data bytes carries Single Frame, False otherwise.

**Return type**

bool

**classmethod `decode_payload`(*addressing\_format*, *raw\_frame\_data*)**

Extract diagnostic message payload from Single Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** ([uds.can.addressing\\_format.CanAddressingFormat](#)) – CAN Addressing Format used.
- **raw\_frame\_data** ([uds.utilities.RawBytesAlias](#)) – Raw data bytes of a considered CAN frame.

**Returns**

Payload bytes of a diagnostic message carried by a considered Single Frame.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod decode\_sf\_dlc**(*addressing\_format*, *raw\_frame\_data*)

Extract a value of Single Frame Data Length from Single Frame data bytes.

**Warning:** The method does not validate the content of the provided frame data bytes. There is no guarantee of the proper output when frame data in invalid format (incompatible with ISO 15765) is provided.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN Addressing Format used.
- **raw\_frame\_data** (*uds.utilities.RawBytesAlias*) – Raw data bytes of a considered CAN frame.

**Raises**

**NotImplementedError** – There is missing implementation for the provided Single Frame Data Length format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

Extracted value of Single Frame Data Length.

**Return type**

int

**classmethod get\_min\_dlc**(*addressing\_format*, *payload\_length*)

Get the minimum value of a CAN frame DLC to carry a Single Frame packet.

**Parameters**

- **addressing\_format** (*uds.can.addressing\_format.CanAddressingFormat*) – CAN addressing format that considered CAN packet uses.
- **payload\_length** (*int*) – Number of payload bytes that considered CAN packet carries.

**Returns**

The lowest value of DLC that enables to fit in provided Single Frame packet data.

**Return type**

int

**classmethod get\_max\_payload\_size**(*addressing\_format=None*, *dcl=None*)

Get the maximum size of a payload that can fit into Single Frame data bytes.

**Parameters**

- **addressing\_format** (*Optional[uds.can.addressing\_format.CanAddressingFormat]*) – CAN addressing format that considered CAN packet uses. Leave None to get the result for CAN addressing format that does not use data bytes for carrying addressing information.
- **dcl** (*Optional[int]*) – DLC value of a CAN frame that carries a considered CAN Packet. Leave None to get the result for the greatest possible DLC value.

**Raises**

**InconsistentArgumentsError** – Single Frame packet cannot use provided attributes according to ISO 15765.

**Returns**

The maximum number of payload bytes that could fit into a considered Single Frame.

**Return type**

int

**classmethod get\_sf\_dl\_bytes\_number(dlc)**

Get number of data bytes used for carrying CAN Packet Type and Single Frame Data Length parameters.

**Parameters**

**dlc** (int) – DLC value of a considered CAN frame.

**Returns**

The number of bytes used for carrying CAN Packet Type and Single Frame Data Length parameters.

**Return type**

int

**classmethod validate\_frame\_data(addressing\_format, raw\_frame\_data)**

Validate whether data field of a CAN Packet carries a properly encoded Single Frame.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a CAN frame to validate.

**Raises**

- **ValueError** – Provided frame data of a CAN frames does not carry a Single Frame CAN packet.
- **InconsistentArgumentsError** – Provided frame data of a CAN frames does not carry a properly encoded Single Frame CAN packet.

**Return type**

None

**classmethod validate\_sf\_dl(sf\_dl, dlc, addressing\_format=None)**

Validate a value of Single Frame Data Length.

**Parameters**

- **sf\_dl** (int) – Single Frame Data Length value to validate.
- **dlc** (int) – DLC value to validate.
- **addressing\_format** (*Optional*[`uds.can.addressing_format.CanAddressingFormat`]) – Value of CAN Addressing Format to use for Single Frame Data Length value validation. Leave None if you do not want to validate whether payload can fit into a CAN Frame with considered DLC.

**Raises**

- **TypeError** – Provided value of Single Frame Data Length is not integer.
- **ValueError** – Provided value of Single Frame Data Length is too small.
- **InconsistentArgumentsError** – It is impossible for a Single Frame with provided DLC to contain as many payload bytes as the provided value of Single Frame Data Length.

**Return type**

None

**classmethod** `__validate_payload_length(payload_length, ai_data_bytes_number)`

Validate value of payload length.

**Parameters**

- **payload\_length** (*int*) – Value to validate.
- **ai\_data\_bytes\_number** (*int*) – Number of data byte that carry Addressing Information.

**Raises**

- **TypeError** – Provided value of payload length is not integer.
- **ValueError** – Provided value of payload length is less or equal to 0.
- **InconsistentArgumentsError** – Provided value of payload length is greater than maximum value.

**Return type**

None

**classmethod** `__extract_sf_dl_data_bytes(addressing_format, raw_frame_data)`

Extract data bytes that carries CAN Packet Type and Single Frame Data Length parameters.

**Warning:** This method does not check whether provided *raw\_frame\_data* actually contains Single Frame.

**Parameters**

- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – CAN Addressing Format used.
- **raw\_frame\_data** (`uds.utilities.RawBytesAlias`) – Raw data bytes of a considered CAN frame.

**Returns**

Extracted data bytes with CAN Packet Type and Single Frame Data Length parameters.

**Return type**`uds.utilities.RawBytesListAlias`**classmethod** `__encode_valid_sf_dl(sf_dl, dlc, addressing_format)`

Create Single Frame data bytes with CAN Packet Type and Single Frame Data Length parameters.

**Note:** This method can only be used to create a valid (compatible with ISO 15765 - Diagnostic on CAN) output.

**Parameters**

- **sf\_dl** (*int*) – Number of payload bytes carried by a considered Single Frame.
- **dlc** (*int*) – DLC value of a CAN Frame to carry this information.
- **addressing\_format** (`uds.can.addressing_format.CanAddressingFormat`) – Value of CAN Addressing Format to use for Single Frame Data Length value validation.

**Returns**

Single Frame data bytes containing CAN Packet Type and Single Frame Data Length parameters.

**Return type**

uds.utilities.RawBytesListAlias

**classmethod** `__encode_any_sf_dl(sf_dl_short=0, sf_dl_long=None)`

Create Single Frame data bytes with CAN Packet Type and Single Frame Data Length parameters.

---

**Note:** This method can be used to create any (also incompatible with ISO 15765 - Diagnostic on CAN) output.

---

**Parameters**

- **sf\_dl\_short** (*int*) – Value to put into a slot of Single Frame Data Length in short format.
- **sf\_dl\_long** (*Optional[int]*) – Value to put into a slot of Single Frame Data Length in long format. Leave None to use short (1-byte-long) format of Single Frame Data Length.

**Returns**

Single Frame data bytes containing CAN Packet Type and Single Frame Data Length parameters.

**Return type**

uds.utilities.RawBytesListAlias

**uds.message**

A subpackage with tools for handling diagnostic message.

**It provides tools for:**

- creating new diagnostic message
- storing historic information about diagnostic message that were either received or transmitted
- Service Identifiers (SID) definition
- Negative Response Codes (NRC) definition

**Submodules**

**uds.message.nrc**

Module with an entire Negative Response Code (NRC) data parameters implementation.

---

**Note:** Explanation of *NRC* values meaning is located in appendix A1 of ISO 14229-1 standard.


---

## Module Contents

### Classes

<b>NRC</b>	Negative Response Codes (NRC) values.
------------	---------------------------------------

**class uds.message.nrc.NRC**  
Bases: uds.utilities.ByteEnum, uds.utilities.ValidatedEnum, uds.utilities.ExtendableEnum

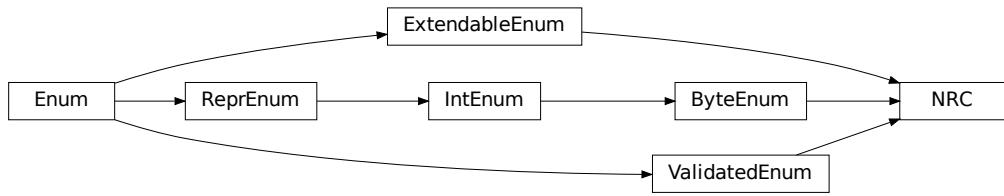

Negative Response Codes (NRC) values.

*Negative Response Code <knowledge-base-nrc>* is a data parameter located in the last byte of a negative response message. NRC informs why a server is not sending a positive response message.

Initialize self. See help(type(self)) for accurate signature.

#### **GeneralReject: *NRC = 16***

GeneralReject (0x10) NRC indicates that the requested action has been rejected by the server.

#### **ServiceNotSupported: *NRC = 17***

ServiceNotSupported (0x11) NRC indicates that the requested action will not be taken because the server does not support the requested service.

#### **SubFunctionNotSupported: *NRC = 18***

SubFunctionNotSupported (0x12) NRC indicates that the requested action will not be taken because the server does not support the service specific parameters of the request message.

#### **IncorrectMessageLengthOrInvalidFormat: *NRC = 19***

IncorrectMessageLengthOrInvalidFormat (0x13) NRC indicates that the requested action will not be taken because the length of the received request message does not match the prescribed length for the specified service or the format of the parameters do not match the prescribed format for the specified service.

#### **ResponseTooLong: *NRC = 20***

ResponseTooLong (0x14) NRC shall be reported by the server if the response to be generated exceeds the maximum number of bytes available by the underlying network layer. This could occur if the response message exceeds the maximum size allowed by the underlying transport protocol or if the response message exceeds the server buffer size allocated for that purpose.

#### **BusyRepeatRequest: *NRC = 33***

BusyRepeatRequest (0x21) NRC indicates that the server is temporarily too busy to perform the requested operation. In this circumstance the client shall perform repetition of the “identical request message” or “another request message”. The repetition of the request shall be delayed by a time specified in the respective implementation documents.

**ConditionsNotCorrect: NRC = 34**

ConditionsNotCorrect (0x22) NRC indicates that the requested action will not be taken because the server prerequisite conditions are not met.

**RequestSequenceError: NRC = 36**

RequestSequenceError (0x24) NRC indicates that the requested action will not be taken because the server expects a different sequence of request messages or message as sent by the client. This may occur when sequence sensitive requests are issued in the wrong order.

**NoResponseFromSubnetComponent: NRC = 37**

NoResponseFromSubnetComponent (0x25) NRC indicates that the server has received the request but the requested action could not be performed by the server as a subnet component which is necessary to supply the requested information did not respond within the specified time.

**FailurePreventsExecutionOfRequestedAction: NRC = 38**

FailurePreventsExecutionOfRequestedAction (0x26) NRC indicates that the requested action will not be taken because a failure condition, identified by a DTC (with at least one DTC status bit for TestFailed, Pending, Confirmed or TestFailedSinceLastClear set to 1), has occurred and that this failure condition prevents the server from performing the requested action.

**RequestOutOfRange: NRC = 49**

RequestOutOfRange (0x31) NRC indicates that the requested action will not be taken because the server has detected that the request message contains a parameter which attempts to substitute a value beyond its range of authority (e.g. attempting to substitute a data byte of 111 when the data is only defined to 100), or which attempts to access a DataIdentifier/RoutineIdentifier that is not supported or not supported in active session.

**SecurityAccessDenied: NRC = 51**

SecurityAccessDenied (0x33) NRC indicates that the requested action will not be taken because the server's security strategy has not been satisfied by the client.

**AuthenticationRequired: NRC = 52**

AuthenticationRequired (0x34) NRC indicates that the requested service will not be taken because the client has insufficient rights based on its Authentication state.

**InvalidKey: NRC = 53**

InvalidKey (0x35) NRC indicates that the server has not given security access because the key sent by the client did not match with the key in the server's memory. This counts as an attempt to gain security.

**ExceedNumberOfAttempts: NRC = 54**

ExceedNumberOfAttempts (0x36) NRC indicates that the requested action will not be taken because the client has unsuccessfully attempted to gain security access more times than the server's security strategy will allow.

**RequiredTimeDelayNotExpired: NRC = 55**

RequiredTimeDelayNotExpired (0x37) NRC indicates that the requested action will not be taken because the client's latest attempt to gain security access was initiated before the server's required timeout period had elapsed.

**SecureDataTransmissionRequired: NRC = 56**

SecureDataTransmissionRequired (0x38) NRC indicates that the requested service will not be taken because the requested action is required to be sent using a secured communication channel.

**SecureDataTransmissionNotAllowed: NRC = 57**

SecureDataTransmissionNotAllowed (0x39) NRC indicates that this message was received using the SecuredDataTransmission (SID 0x84) service. However, the requested action is not allowed to be sent using the SecuredDataTransmission (0x84) service.

**SecureDataVerificationFailed: NRC = 58**

SecureDataVerificationFailed (0x3A) NRC indicates that the message failed in the security sub-layer.

**CertificateVerificationFailed\_InvalidTimePeriod: NRC = 80**

CertificateVerificationFailed\_InvalidTimePeriod (0x50) NRC indicates that date and time of the server does not match the validity period of the Certificate.

**CertificateVerificationFailed\_InvalidSignature: NRC = 81**

CertificateVerificationFailed\_InvalidSignature (0x51) NRC indicates that signature of the Certificate could not be verified.

**CertificateVerificationFailed\_InvalidChainOfTrust: NRC = 82**

CertificateVerificationFailed\_InvalidChainOfTrust (0x52) NRC indicates that The Certificate could not be verified against stored information about the issuing authority.

**CertificateVerificationFailed\_InvalidType: NRC = 83**

CertificateVerificationFailed\_InvalidType (0x53) NRC indicates that the Certificate does not match the current requested use case.

**CertificateVerificationFailed\_InvalidFormat: NRC = 84**

CertificateVerificationFailed\_InvalidFormat (0x54) NRC indicates that the Certificate could not be evaluated because the format requirement has not been met.

**CertificateVerificationFailed\_InvalidContent: NRC = 85**

CertificateVerificationFailed\_InvalidContent (0x55) NRC indicates that the Certificate could not be verified because the content does not match.

**CertificateVerificationFailed\_InvalidScope: NRC = 86**

CertificateVerificationFailed\_InvalidScope (0x56) NRC indicates that the scope of the Certificate does not match the contents of the server.

**CertificateVerificationFailed\_InvalidCertificate: NRC = 87**

CertificateVerificationFailed\_InvalidCertificate (0x57) NRC indicates that the Certificate received from client is invalid, because the server has revoked access for some reason.

**OwnershipVerificationFailed: NRC = 88**

OwnershipVerificationFailed (0x58) NRC indicates that delivered Ownership does not match the provided challenge or could not be verified with the own private key.

**ChallengeCalculationFailed: NRC = 89**

ChallengeCalculationFailed (0x59) NRC indicates that the challenge could not be calculated on the server side.

**SettingAccessRightsFailed: NRC = 90**

SettingAccessRightsFailed (0x5A) NRC indicates that the server could not set the access rights.

**SessionKeyCreationOrDerivationFailed: NRC = 91**

SessionKeyCreationOrDerivationFailed (0x5B) NRC indicates that the server could not create or derive a session key.

**ConfigurationDataUsageFailed: NRC = 92**

ConfigurationDataUsageFailed (0x5C) NRC indicates that the server could not work with the provided configuration data.

**DeAuthenticationFailed: NRC = 93**

DeAuthenticationFailed (0x5D) NRC indicates that DeAuthentication was not successful, server could still be unprotected.

**UploadDownloadNotAccepted: NRC = 112**

UploadDownloadNotAccepted (0x70) NRC indicates that an attempt to upload/download to a server's memory cannot be accomplished due to some fault conditions.

**TransferDataSuspended: NRC = 113**

TransferDataSuspended (0x71) NRC indicates that a data transfer operation was halted due to some fault. The active transferData sequence shall be aborted.

**GeneralProgrammingFailure: NRC = 114**

GeneralProgrammingFailure (0x72) NRC indicates that the server detected an error when erasing or programming a memory location in the permanent memory device (e.g. Flash Memory).

**WrongBlockSequenceCounter: NRC = 115**

WrongBlockSequenceCounter (0x73) NRC indicates that the server detected an error in the sequence of blockSequenceCounter values. Note that the repetition of a TransferData request message with a blockSequenceCounter equal to the one included in the previous TransferData request message shall be accepted by the server.

**RequestCorrectlyReceived\_ResponsePending: NRC = 120**

RequestCorrectlyReceived\_ResponsePending (0x78) NRC indicates that the request message was received correctly, and that all parameters in the request message were valid (these checks can be delayed until after sending this NRC if executing the boot software), but the action to be performed is not yet completed and the server is not yet ready to receive another request. As soon as the requested service has been completed, the server shall send a positive response message or negative response message with a response code different from this.

**SubFunctionNotSupportedInActiveSession: NRC = 126**

SubFunctionNotSupportedInActiveSession (0x7E) NRC indicates that the requested action will not be taken because the server does not support the requested SubFunction in the session currently active. This NRC shall only be used when the requested SubFunction is known to be supported in another session, otherwise response code SubFunctionNotSupported shall be used.

**ServiceNotSupportedInActiveSession: NRC = 127**

ServiceNotSupportedInActiveSession (0x7F) NRC indicates that the requested action will not be taken because the server does not support the requested service in the session currently active. This NRC shall only be used when the requested service is known to be supported in another session, otherwise response code serviceNotSupported shall be used.

**RpmTooHigh: NRC = 129**

RpmTooHigh (0x81) NRC indicates that the requested action will not be taken because the server prerequisite condition for RPM is not met (current RPM is above a preprogrammed maximum threshold).

**RpmTooLow: NRC = 130**

RpmTooLow (0x82) NRC indicates that the requested action will not be taken because the server prerequisite condition for RPM is not met (current RPM is below a preprogrammed minimum threshold).

**EngineIsRunning: NRC = 131**

EngineIsRunning (0x83) NRC is required for those actuator tests which cannot be actuated while the Engine is running. This is different from RPM too high negative response, and shall be allowed.

**Engine IsNotRunning: NRC = 132**

Engine IsNotRunning (0x84) NRC is required for those actuator tests which cannot be actuated unless the Engine is running. This is different from RPM too low negative response, and shall be allowed.

**EngineRunTimeTooLow: NRC = 133**

EngineRunTimeTooLow (0x85) NRC indicates that the requested action will not be taken because the server

prerequisite condition for engine run time is not met (current engine run time is below a preprogrammed limit).

**TemperatureTooHigh: NRC = 134**

TemperatureTooHigh (0x86) NRC indicates that the requested action will not be taken because the server prerequisite condition for temperature is not met (current temperature is above a preprogrammed maximum threshold).

**TemperatureTooLow: NRC = 135**

TemperatureTooLow (0x87) NRC indicates that the requested action will not be taken because the server prerequisite condition for temperature is not met (current temperature is below a preprogrammed minimum threshold).

**VehicleSpeedTooHigh: NRC = 136**

VehicleSpeedTooHigh (0x88) NRC indicates that the requested action will not be taken because the server prerequisite condition for vehicle speed is not met (current VS is above a preprogrammed maximum threshold).

**VehicleSpeedTooLow: NRC = 137**

VehicleSpeedTooLow (0x89) NRC indicates that the requested action will not be taken because the server prerequisite condition for vehicle speed is not met (current VS is below a preprogrammed minimum threshold).

**ThrottleOrPedalTooHigh: NRC = 138**

ThrottleOrPedalTooHigh (0x8A) NRC indicates that the requested action will not be taken because the server prerequisite condition for throttle/pedal position is not met (current throttle/pedal position is above a preprogrammed maximum threshold).

**ThrottleOrPedalTooLow: NRC = 139**

ThrottleOrPedalTooLow (0x8B) NRC indicates that the requested action will not be taken because the server prerequisite condition for throttle/pedal position is not met (current throttle/pedal position is below a preprogrammed minimum threshold).

**TransmissionRangeNotInNeutral: NRC = 140**

TransmissionRangeNotInNeutral (0x8C) NRC indicates that the requested action will not be taken because the server prerequisite condition for being in neutral is not met (current transmission range is not in neutral).

**TransmissionRangeNotInGear: NRC = 141**

TransmissionRangeNotInGear (0x8D) NRC indicates that the requested action will not be taken because the server prerequisite condition for being in gear is not met (current transmission range is not in gear).

**BrakeSwitchOrSwitchesNotClosed: NRC = 143**

BrakeSwitchOrSwitchesNotClosed (0x8F) NRC indicates that for safety reasons, this is required for certain tests before it begins, and shall be maintained for the entire duration of the test.

**ShifterLeverNotInPark: NRC = 144**

ShifterLeverNotInPark (0x90) NRC indicates that for safety reasons, this is required for certain tests before it begins, and shall be maintained for the entire duration of the test.

**TorqueConvertClutchLocked: NRC = 145**

TorqueConvertClutchLocked (0x91) RC indicates that the requested action will not be taken because the server prerequisite condition for torque converter clutch is not met (current torque converter clutch status above a preprogrammed limit or locked).

**VoltageTooHigh: NRC = 146**

VoltageTooHigh (0x92) NRC indicates that the requested action will not be taken because the server prerequisite condition for voltage at the primary pin of the server (ECU) is not met (current voltage is above a preprogrammed maximum threshold).

**VoltageTooLow: NRC = 147**

VoltageTooLow (0x93) NRC indicates that the requested action will not be taken because the server prerequisite condition for voltage at the primary pin of the server (ECU) is not met (current voltage is below a preprogrammed minimum threshold).

**ResourceTemporarilyNotAvailable: NRC = 148**

ResourceTemporarilyNotAvailable (0x94) NRC indicates that the server has received the request but the requested action could not be performed by the server because an application which is necessary to supply the requested information is temporally not available. This NRC is in general supported by each diagnostic service, as not otherwise stated in the data link specific implementation document, therefore it is not listed in the list of applicable response codes of the diagnostic services.

## uds.message.service\_identifiers

Service Identifier (SID) data parameter implementation.

---

**Note:** *Service Identifiers* values and their meanings are defined by ISO 14229-1 and SAE J1979 standards.

---

## Module Contents

### Classes

<code>RequestSID</code>	Request Service Identifier values.
<code>ResponseSID</code>	Response Service Identifier values.

### Attributes

<code>ALL_REQUEST_SIDS</code>	Set with all possible values of Request SID data parameter according to SAE J1979 and ISO 14229 standards.
<code>ALL_RESPONSE_SIDS</code>	Set with all possible values of Response SID data parameter according to SAE J1979 and ISO 14229 standards.

`uds.message.service_identifiers.ALL_REQUEST_SIDS: uds.utilities.RawBytesSetAlias`

Set with all possible values of Request SID data parameter according to SAE J1979 and ISO 14229 standards.

`uds.message.service_identifiers.ALL_RESPONSE_SIDS: uds.utilities.RawBytesSetAlias`

Set with all possible values of Response SID data parameter according to SAE J1979 and ISO 14229 standards.

`exception uds.message.service_identifiers.UnrecognizedSIDWarning`

Bases: Warning

### UnrecognizedSIDWarning

Warning about SID value that is legit but not recognized by the package.

---


**Note:** If you want to register a SID value, you need to define members (for this SID) manually using `add_member()` method (on `RequestSID` and `ResponseSID` classes).

You can also create feature request in the UDS project [issues management system](#) to register a SID value (for which this warning was raised).

---

Initialize self. See `help(type(self))` for accurate signature.

```
class uds.message.service_identifiers.RequestSID
    Bases: uds.utilities.ByteEnum, uds.utilities.ValidatedEnum, uds.utilities.ExtendableEnum
```

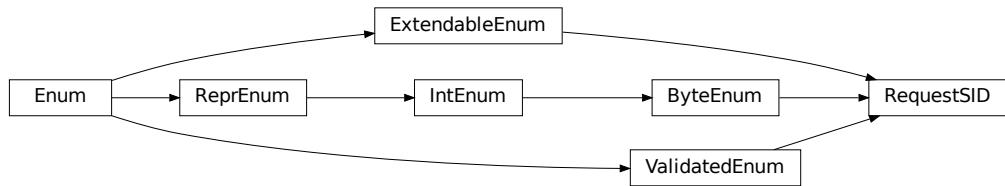

Request Service Identifier values.

---

**Note:** Request `SID` is always the first payload byte of all request message.

---

Initialize self. See `help(type(self))` for accurate signature.

`DiagnosticSessionControl: RequestSID = 16`

`ECUReset: RequestSID = 17`

`SecurityAccess: RequestSID = 39`

`CommunicationControl: RequestSID = 40`

`Authentication: RequestSID = 41`

`TesterPresent: RequestSID = 62`

`ControlDTCSetting: RequestSID = 133`

`ResponseOnEvent: RequestSID = 134`

```
LinkControl: RequestSID = 135
ReadDataByIdentifier: RequestSID = 34
ReadMemoryByAddress: RequestSID = 35
ReadScalingDataByIdentifier: RequestSID = 36
ReadDataByPeriodicIdentifier: RequestSID = 42
DynamicallyDefineDataIdentifier: RequestSID = 44
WriteDataByIdentifier: RequestSID = 46
WriteMemoryByAddress: RequestSID = 61
ClearDiagnosticInformation: RequestSID = 20
ReadDTCInformation: RequestSID = 25
InputOutputControlByIdentifier: RequestSID = 47
RoutineControl: RequestSID = 49
RequestDownload: RequestSID = 52
RequestUpload: RequestSID = 53
TransferData: RequestSID = 54
RequestTransferExit: RequestSID = 55
RequestFileTransfer: RequestSID = 56
SecuredDataTransmission: RequestSID = 132
```

**classmethod is\_request\_sid(value)**

Check whether given value is Service Identifier (SID).

**Parameters**

**value (int)** – Value to check.

**Returns**


True if value is valid SID, else False.

**Return type**

bool

**class uds.message.service\_identifiers.ResponseSID**

Bases: uds.utilities.ByteEnum, uds.utilities.ValidatedEnum, uds.utilities.ExtendableEnum

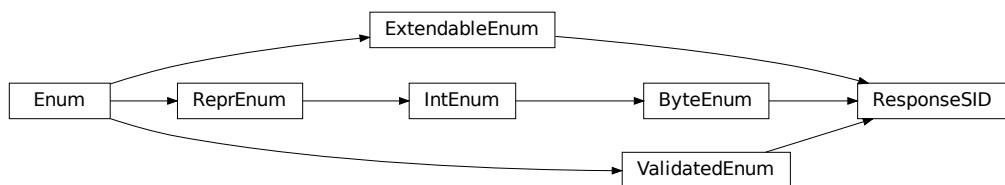

Response Service Identifier values.

---

**Note:** Response *SID* is always the first payload byte of all request message.

---

**Warning:** This enum contains multiple members (for all the services as *RequestSID*), but most of them are dynamically (implicitly) added and invisible in the documentation.

Initialize self. See help(type(self)) for accurate signature.

**NegativeResponse:** *ResponseSID* = 127

**classmethod** *is\_response\_sid*(*value*)

Check whether given value is Response Service Identifier (RSID).

**Parameters**

**value** (*int*) – Value to check.

**Returns**

True if value is valid RSID, else False.

**Return type**

*bool*

## uds.message.uds\_message

Module with common implementation of all diagnostic messages (requests and responses).

*Diagnostic message* are defined on upper layers of UDS OSI Model.

### Module Contents

#### Classes

<i>AbstractUdsMessageContainer</i>	Abstract definition of a container with a diagnostic message information.
<i>UdsMessage</i>	Definition of a diagnostic message.
<i>UdsMessageRecord</i>	Storage for historic information about a diagnostic message that was either received or transmitted.

**class** uds.message.uds\_message.*AbstractUdsMessageContainer*

Bases: abc.ABC



Abstract definition of a container with a diagnostic message information.

**abstract property payload: uds.utilities.RawBytesTupleAlias**

Raw payload bytes carried by this diagnostic message.

**Return type**

uds.utilities.RawBytesTupleAlias

**abstract property addressing\_type: uds.transmission\_attributes.AddressingType**

Addressing for which this diagnostic message is relevant.

**Return type**

uds.transmission\_attributes.AddressingType

**abstract \_\_eq\_\_(other)**

Compare with other object.

**Parameters**

**other** (*object*) – Object to compare.

**Returns**

True if other object has the same type and carries the same diagnostic message, otherwise False.

**Return type**

bool

**class uds.message.UdsMessage(*payload, addressing\_type*)**

Bases: *AbstractUdsMessageContainer*



Definition of a diagnostic message.

Objects of this class act as a storage for all relevant attributes of a *diagnostic message*. Later on, such object might be used in a segmentation process or to transmit the message. Once a message is transmitted, its historic data would be stored in *UdsMessageRecord*.

Create a storage for a single diagnostic message.

**Parameters**

- **payload** (*uds.utilities.RawBytesAlias*) – Raw payload bytes carried by this diagnostic message.
- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing for which this diagnostic message is relevant.

**property payload: uds.utilities.RawBytesTupleAlias**

Raw payload bytes carried by this diagnostic message.

**Return type**

uds.utilities.RawBytesTupleAlias

**property addressing\_type: uds.transmission\_attributes.AddressingType**

Addressing for which this diagnostic message is relevant.

**Return type**

uds.transmission\_attributes.AddressingType

**\_\_eq\_\_(other)**

Compare with other object.

**Parameters**

**other** (*object*) – Object to compare.

**Returns**

True if other object has the same type and carries the same diagnostic message, otherwise False.

**Return type**

bool

**class uds.message.uds\_message.UdsMessageRecord(packets\_records)**

Bases: *AbstractUdsMessageContainer*



Storage for historic information about a diagnostic message that was either received or transmitted.

Create a record of historic information about a diagnostic message that was either received or transmitted.

**Parameters**

**packets\_records** (*uds.packet.PacketsRecordsSequence*) – Sequence (in transmission order) of UDS packets records that carried this diagnostic message.

**property packets\_records: uds.packet.PacketsRecordsTuple**

Sequence (in transmission order) of UDS packets records that carried this diagnostic message.

*UDS packets* sequence is a complete sequence of packets that was exchanged during this diagnostic message transmission.

**Return type**

uds.packet.PacketsRecordsTuple

**property payload: uds.utilities.RawBytesTupleAlias**

Raw payload bytes carried by this diagnostic message.

**Return type**

uds.utilities.RawBytesTupleAlias

**property addressing\_type: uds.transmission\_attributes.AddressingType**

Addressing which was used to transmit this diagnostic message.

**Return type**

uds.transmission\_attributes.AddressingType

**property direction: uds.transmission\_attributes.TransmissionDirection**

Information whether this message was received or sent.

**Return type**

uds.transmission\_attributes.TransmissionDirection

**property transmission\_start: datetime.datetime**

Time stamp when transmission of this message was initiated.

It is determined by a moment of time when the first packet (that carried this message) was published to a bus (either received or transmitted).

**Returns**

Time stamp when transmission of this message was initiated.

**Return type**

datetime.datetime

**property transmission\_end: datetime.datetime**

Time stamp when transmission of this message was completed.

It is determined by a moment of time when the last packet (that carried this message) was published to a bus (either received or transmitted).

**Returns**

Time stamp when transmission of this message was completed.

**Return type**

datetime.datetime

**\_\_eq\_\_(other)**

Compare with other object.

**Parameters**

**other** (*object*) – Object to compare.

**Returns**

True if other object has the same type and carries the same diagnostic message, otherwise False.

**Return type**

bool

**static \_\_validate\_packets\_records(value)**

Validate whether the argument contains UDS Packets records.

**Parameters**

**value** (*uds.packet.PacketsRecordsSequence*) – Value to validate.

**Raises**

- **TypeError** – UDS Packet Records sequence is not list or tuple type.
- **ValueError** – At least one of UDS Packet Records sequence elements is not an object of AbstractUdsPacketRecord class.

**Return type**

None

## uds.packet

A subpackage with tools for handling UDS packets.

**It provides tools for:**

- data definitions for various UDS packet fields (*N\_AI*, *N\_PCI*, *N\_Data*)
- creating new packets
- storing historic information about packets that were either received or transmitted

## Submodules

### uds.packet.abstract\_can\_packet\_container

Abstract definition of CAN packets container.

## Module Contents

### Classes

<code>AbstractCanPacketContainer</code>	Abstract definition of CAN Packets containers.
---	--

```
class uds.packet.abstract_can_packet_container.AbstractCanPacketContainer
Bases: abc.ABC
```



Abstract definition of CAN Packets containers.

**abstract property raw\_frame\_data: uds.utilities.RawBytesTupleAlias**

Raw data bytes of a CAN frame that carries this CAN packet.

**Return type**

uds.utilities.RawBytesTupleAlias

**abstract property can\_id: int**

CAN Identifier (CAN ID) of a CAN Frame that carries this CAN packet.

**Return type**

int

**abstract property addressing\_format: uds.can.CanAddressingFormat**

CAN addressing format used by this CAN packet.

**Return type**

uds.can.CanAddressingFormat

**abstract property addressing\_type: uds.transmission\_attributes.AddressingType**

Addressing type for which this CAN packet is relevant.

**Return type**

uds.transmission\_attributes.AddressingType

**property dlc: int**

Value of Data Length Code (DLC) of a CAN Frame that carries this CAN packet.

**Return type**

int

**property packet\_type: uds.packet.can\_packet\_type.CanPacketType**

Type (N\_PCI value) of this CAN packet.

**Return type**

uds.packet.can\_packet\_type.CanPacketType

**property target\_address: int | None**

Target Address (TA) value of this CAN Packet.

**Target Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Extended Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**property source\_address: int | None**

Source Address (SA) value of this CAN Packet.

**Source Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**property address\_extension: int | None**

Address Extension (AE) value of this CAN Packet.

**Address Extension is used with following *addressing formats*:**

- *Mixed Addressing* - either: - *Mixed 11-bit Addressing* - *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**property data\_length: int | None**

Payload bytes number of a diagnostic message that is carried by this CAN packet.

**Data length is only provided by packets of following types:**

- *Single Frame - Single Frame Data Length*
- *First Frame - First Frame Data Length*

None in other cases.

**Return type**

Optional[int]

**property sequence\_number: int | None**

Sequence Number carried by this CAN packet.

**Sequence Number is only provided by packets of following types:**

- *Consecutive Frame*

None in other cases.

**Return type**

Optional[int]

**property payload: uds.utilities.RawBytesTupleAlias | None**

Diagnostic message payload carried by this CAN packet.

**Payload is only provided by packets of following types:**

- *Single Frame*
- *First Frame*
- *Consecutive Frame*

None in other cases.

**Warning:** For *Consecutive Frames* this value might contain additional filler bytes (they are not part of diagnostic message payload) that were added during *CAN Frame Data Padding*. The presence of filler bytes in *Consecutive Frame* cannot be determined basing solely on the information contained in this packet object.

**Return type**

Optional[uds.utilities.RawBytesTupleAlias]

**property flow\_status: uds.can.CanFlowStatus | None**

Flow Status carried by this CAN packet.

**Flow Status is only provided by packets of following types:**

- *Flow Control*

None in other cases.

**Return type**

Optional[uds.can.CanFlowStatus]

**property block\_size: int | None**

Block Size value carried by this CAN packet.

**Block Size is only provided by packets of following types:**

- *Flow Control*

None in other cases.

**Return type**

Optional[int]

**property st\_min: int | None**

Separation Time minimum (STmin) value carried by this CAN packet.

**STmin is only provided by packets of following types:**

- *Flow Control*

None in other cases.

**Return type**

Optional[int]

**get\_addressing\_information()**

Get Addressing Information carried by this packet.

**Returns**

Addressing Information decoded from CAN ID and CAN Frame data of this packet.

**Return type**

uds.can.CanAddressingInformation.DecodedAIParamsAlias

**uds.packet.abstract\_packet**

Abstract definition of UDS packets that is common for all bus types.

## Module Contents

### Classes

<code>AbstractUdsPacketContainer</code>	Abstract definition of a container with UDS Packet information.
<code>AbstractUdsPacket</code>	Abstract definition of UDS Packet (Network Protocol Data Unit - N_PDU).
<code>AbstractUdsPacketRecord</code>	Abstract definition of a storage for historic information about transmitted or received UDS Packet.

### Attributes

<code>PacketsContainersSequence</code>	Alias for a sequence filled with packet or packet record object.
<code>PacketsTuple</code>	Alias for a packet objects tuple.
<code>PacketsRecordsTuple</code>	Alias for a packet record objects tuple.
<code>PacketsRecordsSequence</code>	Alias for a packet record objects sequence.

**class uds.packet.abstract\_packet.AbstractUdsPacketContainer**

Bases: abc.ABC



Abstract definition of a container with UDS Packet information.

**abstract property raw\_frame\_data: uds.utilities.RawBytesTupleAlias**

Raw data bytes of a frame that carries this packet.

**Return type**

`uds.utilities.RawBytesTupleAlias`

**abstract property addressing\_type:**

`uds.transmission_attributes.addressing.AddressingType`

Addressing for which this packet is relevant.

**Return type**

`uds.transmission_attributes.addressing.AddressingType`

**abstract property packet\_type:**

`uds.packet.abstract_packet_type.AbstractUdsPacketType`

Type (N\_PCI value) of this UDS packet.

**Return type**

`uds.packet.abstract_packet_type.AbstractUdsPacketType`

**abstract property data\_length: int | None**

Payload bytes number of a diagnostic message which was carried by this packet.

**Return type**

`Optional[int]`

**abstract property payload: uds.utilities.RawBytesTupleAlias | None**

Raw payload bytes of a diagnostic message that are carried by this packet.

**Return type**

`Optional[uds.utilities.RawBytesTupleAlias]`

**class uds.packet.abstract\_packet.AbstractUdsPacket**

Bases: `AbstractUdsPacketContainer`



Abstract definition of UDS Packet (Network Protocol Data Unit - N\_PDU).

**abstract property raw\_frame\_data: uds.utilities.RawBytesTupleAlias**

Raw data bytes of a frame that carries this packet.

**Return type**  
`uds.utilities.RawBytesTupleAlias`

**abstract property addressing\_type:**  
`uds.transmission_attributes.addressing.AddressingType`

Addressing for which this packet is relevant.

**Return type**  
`uds.transmission_attributes.addressing.AddressingType`

**abstract property packet\_type:**  
`uds.packet.abstract_packet_type.AbstractUdsPacketType`

Type (N\_PCI value) of this UDS packet.

**Return type**  
`uds.packet.abstract_packet_type.AbstractUdsPacketType`

**abstract property data\_length: int | None**

Payload bytes number of a diagnostic message which was carried by this packet.

**Return type**  
`Optional[int]`

**abstract property payload: uds.utilities.RawBytesTupleAlias | None**

Raw payload bytes of a diagnostic message that are carried by this packet.

**Return type**  
`Optional[uds.utilities.RawBytesTupleAlias]`

**class** `uds.packet.abstract_packet.AbstractUdsPacketRecord(frame, direction, transmission_time)`

Bases: `AbstractUdsPacketContainer`



Abstract definition of a storage for historic information about transmitted or received UDS Packet.

Create a record of historic information about a packet that was either received or transmitted.

#### Parameters

- **frame** (`Any`) – Frame that carried this UDS packet.
- **direction** (`uds.transmission_attributes.transmission_direction.TransmissionDirection`) – Information whether this packet was transmitted or received.
- **transmission\_time** (`datetime.datetime`) – Time stamp when this packet was fully transmitted on a bus.

#### **property frame: Any**

Frame that carried this packet.

**Return type**

`Any`

---

**property direction:**  
`uds.transmission_attributes.transmission_direction.TransmissionDirection`

Information whether this packet was transmitted or received.

**Return type**

`uds.transmission_attributes.transmission_direction.TransmissionDirection`

**property transmission\_time: datetime.datetime**

Time when this packet was fully transmitted on a bus.

**Return type**

`datetime.datetime`

**abstract property raw\_frame\_data: uds.utilities.RawBytesTupleAlias**

Raw data bytes of a frame that carries this packet.

**Return type**

`uds.utilities.RawBytesTupleAlias`

**abstract property addressing\_type:**

`uds.transmission_attributes.addressing.AddressingType`

Addressing for which this packet is relevant.

**Return type**

`uds.transmission_attributes.addressing.AddressingType`

**abstract property packet\_type:**

`uds.packet.abstract_packet_type.AbstractUdsPacketType`

Type (N\_PCI value) of this UDS packet.

**Return type**

`uds.packet.abstract_packet_type.AbstractUdsPacketType`

**abstract property data\_length: int | None**

Payload bytes number of a diagnostic message which was carried by this packet.

**Return type**

`Optional[int]`

**abstract property payload: uds.utilities.RawBytesTupleAlias | None**

Raw payload bytes of a diagnostic message that are carried by this packet.

**Return type**

`Optional[uds.utilities.RawBytesTupleAlias]`

**abstract static \_validate\_frame(value)**

Validate a frame argument.

**Parameters**

**value** (`Any`) – Value to validate.

**Raises**

- **TypeError** – The frame argument has unsupported.
- **ValueError** – Some attribute of the frame argument is missing or its value is unexpected.

**Return type**

`None`

**uds.packet.abstract\_packet.PacketsContainersSequence**

Alias for a sequence filled with packet or packet record object.

**uds.packet.abstract\_packet.PacketsTuple**

Alias for a packet objects tuple.

**uds.packet.abstract\_packet.PacketsRecordsTuple**

Alias for a packet record objects tuple.

**uds.packet.abstract\_packet.PacketsRecordsSequence**

Alias for a packet record objects sequence.

**uds.packet.abstract\_packet\_type**

Common (abstract) implementation of UDS Packet Types.

## Module Contents


### Classes

**AbstractUdsPacketType**

Abstract definition of UDS packet type.

**class uds.packet.abstract\_packet\_type.AbstractUdsPacketType**

Bases:      `uds.utilities.NibbleEnum`,      `uds.utilities.ValidatedEnum`,      `uds.utilities.ExtendableEnum`

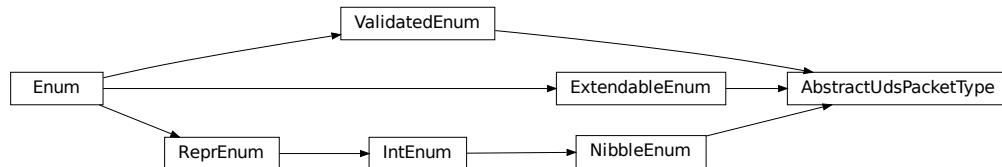

Abstract definition of UDS packet type.

Packet type information is carried by *Network Protocol Control Information (N\_PCI)*. Enums with packet types (N\_PCI) values for certain buses (e.g. CAN, LIN, FlexRay) must inherit after this class.

---

**Note:** There are differences in values for each bus (e.g. LIN does not use Flow Control).

---

Initialize self. See `help(type(self))` for accurate signature.

**abstract classmethod `is_initial_packet_type`(*value*)**

Check whether given argument is a member or a value of packet type that initiates a diagnostic message.

**Parameters**

**`value` (`AbstractUdsPacketType`)** – Value to check.

**Returns**

True if given argument is a packet type that initiates a diagnostic message, else False.

**Return type**

bool

**uds.packet.can\_packet**


CAN bus specific implementation of UDS packets.

**Module Contents****Classes**

<code>CanPacket</code>	Definition of a CAN packet.
------------------------	-----------------------------

```
class uds.packet.can_packet.CanPacket(*, packet_type, addressing_format, addressing_type, can_id=None,
                                         target_address=None, source_address=None,
                                         address_extension=None, dlc=None,
                                         **packet_type_specific_kwargs)
```

Bases: `uds.packet.abstract_can_packet_container.AbstractCanPacketContainer`, `uds.packet.abstract_packet.AbstractUdsPacket`



Definition of a CAN packet.

Objects of this class act as a storage for all relevant attributes of a *CAN packet*.

Create a storage for a single CAN packet.

**Parameters**

- **packet\_type** (`uds.packet.can_packet_type.CanPacketType`) – Type of this CAN packet.
- **addressing\_format** (`uds.can.CanAddressingFormat`) – CAN addressing format that this CAN packet uses.
- **addressing\_type** (`uds.transmission_attributes.AddressingType`) – Addressing type for which this CAN packet is relevant.
- **can\_id** (`Optional[int]`) – CAN Identifier value that is used by this packet. Leave None if other arguments unambiguously determine CAN ID value.

- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. Leave None if provided *addressing\_format* does not use Target Address parameter or the value of Target Address was provided in *can\_id* parameter.
- **source\_address** (*Optional[int]*) – Source Address value carried by this CAN packet. Leave None if provided *addressing\_format* does not use Source Address parameter or the value of Source Address was provided in *can\_id* parameter.
- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. Leave None if provided *addressing\_format* does not use Address Extension parameter.
- **dlc** (*Optional[int]*) – DLC value of a CAN frame that carries this CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill unused data bytes.

**Warning:** You have to provide DLC value for packets of First Frame type.

- **packet\_type\_specific\_kwargs** (*Any*) – Arguments that are specific for provided CAN Packet Type.
  - **parameter filler\_byte**  
(optional for: SF, CF and FC) Filler Byte value to use for CAN Frame Data Padding.
  - **parameter payload**  
(required for: SF, FF and CF) Payload of a diagnostic message that is carried by this CAN packet.
  - **parameter data\_length**  
(required for: FF) Number of payload bytes of a diagnostic message initiated by this First Frame packet.
  - **parameter sequence\_number**  
(required for: CF) Sequence number value of this Consecutive Frame.
  - **parameter flow\_status**  
(required for: FC) Flow status information carried by this Flow Control frame.
  - **parameter block\_size**  
(required for: FC with ContinueToSend Flow Status) Block size information carried by this Flow Control frame.
  - **parameter st\_min**  
(required for: FC with ContinueToSend Flow Status) Separation Time minimum information carried by this Flow Control frame.

**property raw\_frame\_data: uds.utilities.RawBytesTupleAlias**

Raw data bytes of a CAN frame that carries this CAN packet.

**Return type**

uds.utilities.RawBytesTupleAlias

**property can\_id: int**

CAN Identifier (CAN ID) of a CAN Frame that carries this CAN packet.

---

**Return type**  
int

**property addressing\_format: uds.can.CanAddressingFormat**  
CAN addressing format used by this CAN packet.

**Return type**  
uds.can.CanAddressingFormat

**property addressing\_type: uds.transmission\_attributes.AddressingType**  
Addressing type for which this CAN packet is relevant.

**Return type**  
uds.transmission\_attributes.AddressingType

**property dlc: int**  
Value of Data Length Code (DLC) of a CAN Frame that carries this CAN packet.

**Return type**  
int

**property packet\_type: uds.packet.can\_packet\_type.CanPacketType**  
Type (N\_PCI value) of this CAN packet.

**Return type**  
*uds.packet.can\_packet\_type.CanPacketType*

**property target\_address: int | None**  
Target Address (TA) value of this CAN Packet.

**Target Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Extended Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**  
Optional[int]

**property source\_address: int | None**  
Source Address (SA) value of this CAN Packet.

**Source Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**  
Optional[int]

**property address\_extension: int | None**  
Address Extension (AE) value of this CAN Packet.

**Address Extension is used with following *addressing formats*:**

- *Mixed Addressing* - either: - *Mixed 11-bit Addressing* - *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**set\_address\_information**(\**addressing\_format, addressing\_type, can\_id=None, target\_address=None, source\_address=None, address\_extension=None*)

Change addressing information for this CAN packet.

This function enables to change an entire *Network Address Information* for a *CAN packet*.**Parameters**

- **addressing\_format** (*uds.can.CanAddressingFormat*) – CAN addressing format that this CAN packet uses.
- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **can\_id** (*Optional[int]*) – CAN Identifier value that is used by this packet. Leave None if other arguments unambiguously determine CAN ID value.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. Leave None if provided *addressing\_format* does not use Target Address parameter or the value of Target Address was provided in *can\_id* parameter.
- **source\_address** (*Optional[int]*) – Source Address value carried by this CAN packet. Leave None if provided *addressing\_format* does not use Source Address parameter or the value of Source Address was provided in *can\_id* parameter.
- **address\_extension** (*Optional[int]*) – Address Extension value carried by this CAN packet. Leave None if provided *addressing\_format* does not use Address Extension parameter.

**Raises****NotImplementedError** – There is missing implementation for the provided Addressing Format. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.**Return type**

None

**set\_address\_information\_normal\_11bit**(*addressing\_type, can\_id*)

Change addressing information for this CAN packet to use Normal 11-bit Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **can\_id** (*int*) – CAN Identifier value that is used by this packet.

**Return type**

None

**set\_address\_information\_normal\_fixed**(\**addressing\_type, can\_id=None, target\_address=None, source\_address=None*)

Change addressing information for this CAN packet to use Normal Fixed Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.

- **can\_id** (*Optional[int]*) – CAN Identifier value that is used by this packet. Leave None if the values of *target\_address* and *source\_address* parameters are provided.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. Leave None if the value of *can\_id* parameter is provided.
- **source\_address** (*Optional[int]*) – Source Address value carried by this CAN packet. Leave None if the value of *can\_id* parameter is provided.

**Return type**

None

**set\_address\_information\_extended**(*addressing\_type*, *can\_id*, *target\_address*)

Change addressing information for this CAN packet to use Extended Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **can\_id** (*int*) – CAN Identifier value that is used by this packet.
- **target\_address** (*int*) – Target Address value carried by this CAN Packet.

**Return type**

None

**set\_address\_information\_mixed\_11bit**(*addressing\_type*, *can\_id*, *address\_extension*)

Change addressing information for this CAN packet to use Mixed 11-bit Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **can\_id** (*int*) – CAN Identifier value that is used by this packet.
- **address\_extension** (*int*) – Address Extension value carried by this CAN packet.

**Return type**

None

**set\_address\_information\_mixed\_29bit**(*addressing\_type*, *address\_extension*, *can\_id=None*,  
*target\_address=None*, *source\_address=None*)

Change addressing information for this CAN packet to use Mixed 29-bit Addressing format.

**Parameters**

- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **can\_id** (*Optional[int]*) – CAN Identifier value that is used by this packet. Leave None if the values of *target\_address* and *source\_address* parameters are provided.
- **target\_address** (*Optional[int]*) – Target Address value carried by this CAN Packet. Leave None if the value of *can\_id* parameter is provided.
- **source\_address** (*Optional[int]*) – Source Address value carried by this CAN packet. Leave None if the value of *can\_id* parameter is provided.
- **address\_extension** (*int*) – Address Extension value carried by this CAN packet.

**Return type**

None

**set\_packet\_data**(\*, *packet\_type*, *dlc=None*, \*\**packet\_type\_specific\_kwargs*)

Change packet type and data field of this CAN packet.

This function enables to change an entire *Network Data Field* and *Network Protocol Control Information* for a [CAN packet](#).

#### Parameters

- **packet\_type** (`uds.packet.can_packet_type.CanPacketType`) – Type of this CAN packet.
- **dlc** (*Optional[int]*) – DLC value of a CAN frame that carries this CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill unused data bytes.

**Warning:** You have to provide DLC value for packets of First Frame type.

- **packet\_type\_specific\_kwargs** (*Any*) – Arguments that are specific for provided CAN Packet Type.
  - **parameter filler\_byte**  
(optional for: SF, CF and FC) Filler Byte value to use for CAN Frame Data Padding.
  - **parameter payload**  
(required for: SF, FF and CF) Payload of a diagnostic message that is carried by this CAN packet.
  - **parameter data\_length**  
(required for: FF) Number of payload bytes of a diagnostic message initiated by this First Frame packet.
  - **parameter sequence\_number**  
(required for: CF) Sequence number value of this Consecutive Frame.
  - **parameter flow\_status**  
(required for: FC) Flow status information carried by this Flow Control frame.
  - **parameter block\_size**  
(required for: FC with ContinueToSend Flow Status) Block size information carried by this Flow Control frame.
  - **parameter st\_min**  
(required for: FC with ContinueToSend Flow Status) Separation Time minimum information carried by this Flow Control frame.

#### Raises

**NotImplementedError** – There is missing implementation for the provided CAN Packet Type. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

#### Return type

None

**set\_single\_frame\_data**(*payload*, *dcl=None*, *filler\_byte=DEFAULT\_FILLER\_BYTE*)

Change packet type (to Single Frame) and data field of this CAN packet.

This function enables to change an entire *Network Data Field* and *Network Protocol Control Information* for a *Single Frame*.

**Parameters**

- ***payload*** (*uds.utilities.RawBytesAlias*) – Payload of a diagnostic message that is carried by this CAN packet.
- ***dcl*** (*Optional[int]*) – DLC value of a CAN frame that carries this CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill unused data bytes.
- ***filler\_byte*** (*int*) – Filler Byte value to use for CAN Frame Data Padding.

**Return type**

None

**set\_first\_frame\_data**(*dcl*, *payload*, *data\_length*)

Change packet type (to First Frame) and data field of this CAN packet.

This function enables to change an entire *Network Data Field* and *Network Protocol Control Information* for a *First Frame*.

**Parameters**

- ***dcl*** (*int*) – DLC value of a CAN frame that carries this CAN Packet.
- ***payload*** (*uds.utilities.RawBytesAlias*) – Payload of a diagnostic message that is carried by this CAN packet.
- ***data\_length*** (*int*) – Number of payload bytes of a diagnostic message initiated by this First Frame packet.

**Return type**

None

**set\_consecutive\_frame\_data**(*payload*, *sequence\_number*, *dcl=None*,  
*filler\_byte=DEFAULT\_FILLER\_BYTE*)

Change packet type (to Consecutive Frame) and data field of this CAN packet.

This function enables to change an entire *Network Data Field* and *Network Protocol Control Information* for a *Consecutive Frame*.

**Parameters**

- ***payload*** (*uds.utilities.RawBytesAlias*) – Payload of a diagnostic message that is carried by this CAN packet.
- ***sequence\_number*** (*int*) – Sequence number value of this Consecutive Frame.
- ***dcl*** (*Optional[int]*) – DLC value of a CAN frame that carries this CAN Packet.
  - None - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - int type value - DLC value to set. CAN Data Padding will be used to fill unused data bytes.

- **filler\_byte** (*int*) – Filler Byte value to use for CAN Frame Data Padding.

**Return type**

None

**set\_flow\_control\_data**(*flow\_status*, *block\_size*=*None*, *st\_min*=*None*, *dcl*=*None*,  
                          *filler\_byte*=*DEFAULT\_FILLER\_BYTE*)

Change packet type (to Flow Control) and data field of this CAN packet.

This function enables to change an entire *Network Data Field* and *Network Protocol Control Information* for a *Flow Control*.**Parameters**

- **flow\_status** (*uds.can.CanFlowStatus*) – Flow status information carried by this Flow Control frame.
- **block\_size** (*Optional[int]*) – Block size information carried by this Flow Control frame.
- **st\_min** (*Optional[int]*) – Separation Time minimum information carried by this Flow Control frame.
- **dcl** (*Optional[int]*) – DLC value of a CAN frame that carries this CAN Packet.
  - *None* - use CAN Data Frame Optimization (CAN ID value will be automatically determined)
  - *int type value* - DLC value to set. CAN Data Padding will be used to fill unused data bytes.
- **filler\_byte** (*int*) – Filler Byte value to use for CAN Frame Data Padding.

**Return type**

None

**\_\_validate\_unambiguous\_ai\_change**(*addressing\_format*)

Validate whether CAN Addressing Format change to provided value is ambiguous.

**Parameters****addressing\_format** (*uds.can.CanAddressingFormat*) – Desired value of CAN Addressing Format.**Raises****AmbiguityError** – Cannot change value because the operation is ambiguous.**Return type**

None

**\_\_update\_ai\_data\_byte()**Update the value of *raw\_frame\_data* attribute after Addressing Information change.**Return type**

None

## uds.packet.can\_packet\_record

CAN bus specific implementation of UDS packets records.


### Module Contents

#### Classes

<code>CanPacketRecord</code>	Definition of a CAN packet record.
------------------------------	------------------------------------

```
class uds.packet.can_packet_record.CanPacketRecord(frame, direction, addressing_type,
                                                    addressing_format, transmission_time)

Bases: uds.packet.abstract_can_packet_container.AbstractCanPacketContainer, uds.packet.
        abstract_packet.AbstractUdsPacketRecord
```



Definition of a CAN packet record.

Objects of this class act as a storage for historic information about transmitted or received *CAN packet*.

Create a record of historic information about a CAN packet that was either received or transmitted.

#### Parameters

- **frame** (*CanFrameAlias*) – Either received or transmitted CAN frame that carried this CAN Packet.
- **direction** (*uds.transmission\_attributes.TransmissionDirection*) – Information whether this packet was transmitted or received.
- **addressing\_type** (*uds.transmission\_attributes.AddressingType*) – Addressing type for which this CAN packet is relevant.
- **addressing\_format** (*uds.can.CanAddressingFormat*) – CAN addressing format that this CAN packet used.
- **transmission\_time** (*datetime.datetime*) – Time stamp when this packet was fully transmitted on a CAN bus.

#### property raw\_frame\_data: `uds.utilities.RawBytesTupleAlias`

Raw data bytes of a frame that carried this CAN packet.

#### Return type

`uds.utilities.RawBytesTupleAlias`

#### property can\_id: `int`

CAN Identifier (CAN ID) of a CAN Frame that carries this CAN packet.

**Return type**

int

**property addressing\_format:** uds.can.CanAddressingFormat

CAN addressing format used by this CAN packet.

**Return type**

uds.can.CanAddressingFormat

**property addressing\_type:** uds.transmission\_attributes.AddressingType

Addressing type over which this CAN packet was transmitted.

**Return type**

uds.transmission\_attributes.AddressingType

**property packet\_type:** uds.packet.can\_packet\_type.CanPacketType

CAN packet type value - N\_PCI value of this N\_PDU.

**Return type**

uds.packet.can\_packet\_type.CanPacketType

**property target\_address:** int | None

Target Address (TA) value of this CAN Packet.

**Target Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Extended Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**property source\_address:** int | None

Source Address (SA) value of this CAN Packet.

**Source Address value is used with following *addressing formats*:**

- *Normal Fixed Addressing*
- *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**property address\_extension:** int | None

Address Extension (AE) value of this CAN Packet.

**Address Extension is used with following *addressing formats*:**

- *Mixed Addressing* - either: - *Mixed 11-bit Addressing* - *Mixed 29-bit Addressing*

None in other cases.

**Return type**

Optional[int]

**static \_validate\_frame(value)**

Validate a CAN frame argument.

**Parameters**

**value** (*Any*) – Value to validate.

**Raises**

- **TypeError** – The frame argument has unsupported.
- **ValueError** – Some attribute of the frame argument is missing or its value is unexpected.

**Return type**

None

**\_\_assess\_packet\_type()**

Assess and set value of Packet Type attribute.

**Return type**

None

**\_\_assess\_ai\_attributes()**

Assess and set values of attributes with Addressing Information.

**Raises**

**InconsistentArgumentsError** – Value of Addressing Type that is already set does not match decoded one.

**Return type**

None

**uds.packet.can\_packet\_type**

CAN packet types definitions.

## Module Contents


### Classes

**CanPacketType**

Definition of CAN packet types.

**class uds.packet.can\_packet\_type.CanPacketType**

Bases: *uds.packet.abstract\_packet\_type.AbstractUdsPacketType*

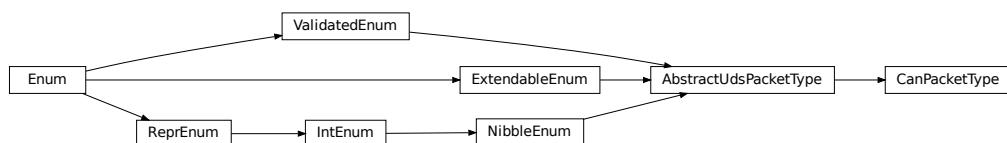

Definition of CAN packet types.

*CAN packet types* are *Network Protocol Control Information (N\_PCI)* values that are specific for CAN bus.

Initialize self. See help(type(self)) for accurate signature.

**SINGLE\_FRAME: *CanPacketType***

CAN packet type (N\_PCI) value of *Single Frame (SF)*.

**FIRST\_FRAME: *CanPacketType***

CAN packet type (N\_PCI) value of First Frame (FF) <knowledge-base-can-first-frame>`.

**CONSECUTIVE\_FRAME: *CanPacketType***

CAN packet type (N\_PCI) value of *Consecutive Frame (CF)*.

**FLOW\_CONTROL: *CanPacketType***

CAN packet type (N\_PCI) value of *Flow Control (FC)*.

**classmethod *is\_initial\_packet\_type*(*value*)**

Check whether given argument is a CAN packet type that initiates a diagnostic message.

**Parameters**

**value** (*CanPacketType*) – Value to check.

**Returns**

True if given argument is a packet type that initiates a diagnostic message, else False.

**Return type**

bool

**uds.segmentation**

A subpackage with tools for handing segmentation.

*Segmentation* defines two processes:

- *diagnostic message segmentation*
- *packets desegmentation*

This subpackage contains implementation of:

- common API interface for all segmentation duties
- classes that handles segmentation for each bus

**Submodules**

**uds.segmentation.abstract\_segmenter**

Definition of API for segmentation and desegmentation strategies.

## Module Contents

### Classes

`AbstractSegmenter`

Abstract definition of a segmenter class.

`exception uds.segmentation.abstract_segmenter.SegmentationError`

Bases: `ValueError`


`SegmentationError`

UDS segmentation or desegmentation process cannot be completed due to input data inconsistency.

Initialize self. See `help(type(self))` for accurate signature.

`class uds.segmentation.abstract_segmenter.AbstractSegmenter`

Bases: `abc.ABC`



Abstract definition of a segmenter class.

Segmenter classes defines UDS segmentation and desegmentation duties. They contain helper methods that are essential for successful `segmentation` and `desegmentation` execution.

---

**Note:** Each concrete segmenter class handles exactly one bus.

---

`abstract property supported_packet_class: Type[uds.packet.AbstractUdsPacket]`

Class of UDS Packet supported by this segmenter.

**Return type**

`Type[uds.packet.AbstractUdsPacket]`

`abstract property supported_packet_record_class:`

`Type[uds.packet.AbstractUdsPacketRecord]`

Class of UDS Packet Record supported by this segmenter.

**Return type**

`Type[uds.packet.AbstractUdsPacketRecord]`

**is\_supported\_packet\_type**(*packet*)

Check if the argument value is a packet object of a supported type.

**Parameters**

**packet** (*uds.packet.AbstractUdsPacketContainer*) – Packet object to check.

**Returns**

True if provided value is an object of a supported packet type, False otherwise.

**Return type**

bool

**abstract is\_input\_packet**(\*\**kwargs*)

Check if provided frame attributes belong to a UDS packet which is an input for this Segmenteer.

**Parameters**

**kwargs** – Attributes of a frame to check.

**Returns**

Addressing Type used for transmission of this UDS packet according to the configuration of this Segmenteer (if provided attributes belongs to an input UDS packet), otherwise None.

**Return type**

Optional[*uds.transmission\_attributes.AddressingType*]

**is\_supported\_packets\_sequence\_type**(*packets*)

Check if the argument value is a packets sequence of a supported type.

**Parameters**

**packets** (*Sequence[uds.packet.AbstractUdsPacketContainer]*) – Packets sequence to check.

**Returns**

True if provided value is a packets sequence of a supported type, False otherwise.

**Return type**

bool

**abstract is\_desegmented\_message**(*packets*)

Check whether provided packets are full sequence of packets that form exactly one diagnostic message.

**Parameters**

**packets** (*uds.packet.PacketsContainersSequence*) – Packets sequence to check.

**Returns**

True if the packets form exactly one diagnostic message. False if there are missing, additional or inconsistent (e.g. two packets that initiate a message) packets.

**Return type**

bool

**abstract desegmentation**(*packets*)

Perform desegmentation of UDS packets.

**Parameters**

**packets** (*uds.packet.PacketsContainersSequence*) – UDS packets to desegment into UDS message.

**Raises**

**SegmentationError** – Provided packets are not a complete packet sequence that form a diagnostic message.

**Returns**

A diagnostic message that is carried by provided UDS packets.

**Return type**

`Union[uds.message.UdsMessage, uds.message.UdsMessageRecord]`

**abstract segmentation(*message*)**

Perform segmentation of a diagnostic message.

**Parameters**

`message (uds.message.UdsMessage)` – UDS message to divide into UDS packets.

**Raises**

`SegmentationError` – Provided diagnostic message cannot be segmented.

**Returns**

UDS packet(s) that carry provided diagnostic message.

**Return type**

`uds.packet.PacketsTuple`

**uds.segmentation.can\_segmenter**


Segmentation specific for CAN bus.

**Module Contents****Classes****CanSegmenter**

Segmenter class that provides utilities for segmentation and desegmentation specific for CAN bus.

```
class uds.segmentation.can_segmenter.CanSegmenter(*, addressing_information,
                                                dlc=CanDlcHandler.MIN_BASE_UDS_DLC,
                                                use_data_optimization=False,
                                                filler_byte=DEFAULT_FILLER_BYTE)
```

Bases: `uds.segmentation.abstract_segmenter.AbstractSegmenter`



Segmenter class that provides utilities for segmentation and desegmentation specific for CAN bus.

Configure CAN Segmenter.

**Parameters**

- **addressing\_information** (`uds.can.AbstractCanAddressingInformation`) – Addressing Information configuration of a CAN node.

- **dlc** (*int*) – Base CAN DLC value to use for creating CAN Packets.
- **use\_data\_optimization** (*bool*) – Information whether to use CAN Frame Data Optimization in created CAN Packets during segmentation.
- **filler\_byte** (*int*) – Filler byte value to use for CAN Frame Data Padding in created CAN Packets during segmentation.

**property supported\_packet\_class:** `Type[uds.packet.AbstractUdsPacket]`

Class of UDS Packet supported by CAN segmenter.

**Return type**

`Type[uds.packet.AbstractUdsPacket]`

**property supported\_packet\_record\_class:** `Type[uds.packet.AbstractUdsPacketRecord]`

Class of UDS Packet Record supported by CAN segmenter.

**Return type**

`Type[uds.packet.AbstractUdsPacketRecord]`

**property addressing\_format:** `uds.can.CanAddressingFormat`

CAN Addressing format used.

**Return type**

`uds.can.CanAddressingFormat`

**property rx\_packets\_physical\_ai:** `uds.can.PacketAIParamsAlias`

Addressing Information parameters of incoming physically addressed CAN packets.

**Return type**

`uds.can.PacketAIParamsAlias`

**property tx\_packets\_physical\_ai:** `uds.can.PacketAIParamsAlias`

Addressing Information parameters of outgoing physically addressed CAN packets.

**Return type**

`uds.can.PacketAIParamsAlias`

**property rx\_packets\_functional\_ai:** `uds.can.PacketAIParamsAlias`

Addressing Information parameters of incoming functionally addressed CAN packets.

**Return type**

`uds.can.PacketAIParamsAlias`

**property tx\_packets\_functional\_ai:** `uds.can.PacketAIParamsAlias`

Addressing Information parameters of outgoing functionally addressed CAN packets.

**Return type**

`uds.can.PacketAIParamsAlias`

**property addressing\_information:** `uds.can.AbstractCanAddressingInformation`

Addressing Information configuration of a CAN node.

**Return type**

`uds.can.AbstractCanAddressingInformation`

**property dlc:** `int`

Value of base CAN DLC to use for CAN Packets.

---

**Note:** All output CAN Packets (created by `segmentation()`) will have this DLC value set unless [CAN Frame Data Optimization](#) is used.

---

**Return type**

int

**property use\_data\_optimization: bool**

Information whether to use CAN Frame Data Optimization during CAN Packet creation.

**Return type**

bool

**property filler\_byte: int**

Filler byte value to use for CAN Frame Data Padding during segmentation.

**Return type**

int

**is\_input\_packet(can\_id, data)**

Check if provided frame attributes belong to a UDS CAN packet which is an input for this CAN Segmente.

**Parameters**

- **can\_id** (int) – Identifier of CAN frame to check.
- **data** (uds.utilities.RawBytesAlias) – Data field of CAN frame to check.

**Returns**

Addressing Type used for transmission of this UDS CAN packet according to the configuration of this CAN Segmente (if provided attributes belongs to an input UDS CAN packet), otherwise None.

**Return type**

Optional[uds.transmission\_attributes.AddressingType]

**is\_desegmented\_message(packets)**

Check whether provided packets are full sequence of packets that form exactly one diagnostic message.

**Parameters**

**packets** (uds.packet.PacketsContainersSequence) – Packets sequence to check.

**Raises**

- **ValueError** – Provided value is not CAN packets sequence.
- **NotImplementedError** – There is missing implementation for the provided initial packet type. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

True if the packets form exactly one diagnostic message. False if there are missing, additional or inconsistent (e.g. two packets that initiate a message) packets.

**Return type**

bool

**desegmentation(packets)**

Perform desegmentation of CAN packets.

**Parameters**

**packets** (uds.packet.PacketsContainersSequence) – CAN packets to desegment into UDS message.

**Raises**

- **SegmentationError** – Provided packets are not a complete packets sequence that form a diagnostic message.
- **NotImplementedError** – There is missing implementation for the provided CAN Packets. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

A diagnostic message that is an outcome of CAN packets desegmentation.

**Return type**

Union[uds.message.UdsMessage, uds.message.UdsMessageRecord]

**segmentation(message)**

Perform segmentation of a diagnostic message.

**Parameters**

**message** (*uds.message.UdsMessage*) – UDS message to divide into UDS packets.

**Raises**

- **TypeError** – Provided value is not instance of UdsMessage class.
- **NotImplementedError** – There is missing implementation for the Addressing Type used by provided message. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

CAN packets that are an outcome of UDS message segmentation.

**Return type**

uds.packet.PacketsTuple

**\_\_physical\_segmentation(message)**

Segment physically addressed diagnostic message.

**Parameters**

**message** (*uds.message.UdsMessage*) – UDS message to divide into UDS packets.

**Raises**

**SegmentationError** – Provided diagnostic message cannot be segmented.

**Returns**

CAN packets that are an outcome of UDS message segmentation.

**Return type**

uds.packet.PacketsTuple

**\_\_functional\_segmentation(message)**

Segment functionally addressed diagnostic message.

**Parameters**

**message** (*uds.message.UdsMessage*) – UDS message to divide into UDS packets.

**Raises**

**SegmentationError** – Provided diagnostic message cannot be segmented.

**Returns**

CAN packets that are an outcome of UDS message segmentation.

**Return type**

uds.packet.PacketsTuple

## uds.transmission\_attributes

Definition of attributes that describes UDS communication.

### Submodules

#### uds.transmission\_attributes.addressing

Implementation of diagnostic messages addressing.

*Addressing* describes a communication model that is used during UDS communication.


### Module Contents

#### Classes

<code>AddressingType</code>	Addressing types values defined by UDS protocol.
-----------------------------	--

##### `class uds.transmission_attributes.addressing.AddressingType`

Bases: `aenum.StrEnum`, `uds.utilities.ValidatedEnum`

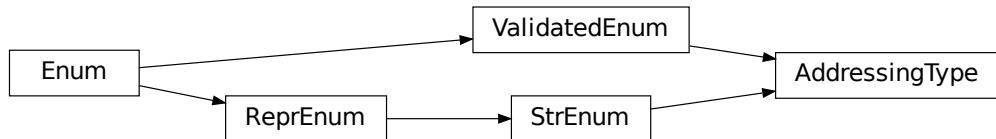

Addressing types values defined by UDS protocol.

*Addressing* describes a communication model that is used during UDS communication.

Initialize self. See `help(type(self))` for accurate signature.

**PHYSICAL:** `AddressingType = 'Physical'`

*Physical addressing* - 1 (client) to 1 (server) communication.

**FUNCTIONAL:** `AddressingType = 'Functional'`

*Functional addressing* - 1 (client) to many (servers) communication.

## `uds.transmission_attributes.transmission_direction`


Definition of communication direction.

### Module Contents

#### Classes

<code>TransmissionDirection</code>	Direction of a communication.
------------------------------------	-------------------------------

`class uds.transmission_attributes.transmission_direction.TransmissionDirection`  
Bases: `aenum.StrEnum`, `uds.utilities.ValidatedEnum`

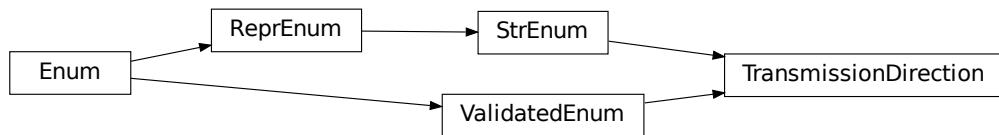

Direction of a communication.

Initialize self. See help(type(self)) for accurate signature.

**RECEIVED:** `TransmissionDirection = 'Rx'`

Incoming transmission from the perspective of the code.

**TRANSMITTED:** `TransmissionDirection = 'Tx'`

Outgoing transmission from the perspective of the code.

## `uds.transport_interface`

A subpackage with implementation for UDS middle layers (Transport and Network).

It provides configurable Transport Interfaces for:

- transmitting and receiving UDS packets
- transmitting and receiving UDS messages
- storing historic information about transmitted and received UDS packets
- storing historic information about transmitted and received UDS messages
- managing Transport and Network layer errors

## Submodules

`uds.transport_interface.abstract_transport_interface`

Abstract definition of UDS Transport Interface.

## Module Contents

### Classes

<code>AbstractTransportInterface</code>	Abstract definition of Transport Interface.
<code>class uds.transport_interface.abstract_transport_interface.AbstractTransportInterface(bus_manager)</code>	

Bases: abc.ABC



Abstract definition of Transport Interface.

Transport Interfaces are meant to handle middle layers (Transport and Network) of UDS OSI Model.

Create Transport Interface (an object for handling UDS Transport and Network layers).

#### Parameters

`bus_manager (Any)` – An object that handles the bus (Physical and Data layers of OSI Model).

#### Raises

`ValueError` – Provided value of bus manager is not supported by this Transport Interface.

#### property `bus_manager: Any`

Value of the bus manager used by this Transport Interface.

Bus manager handles Physical and Data layers (OSI Model) of the bus.

#### Return type

Any

#### abstract property `segmenter: uds.segmentation.AbstractSegmenter`

Value of the segmenter used by this Transport Interface.

**Warning:** Do not change any segmenter attributes as it might cause malfunction of the entire Transport Interface.

#### Return type

`uds.segmentation.AbstractSegmenter`

**abstract static** **is\_supported\_bus\_manager**(*bus\_manager*)

Check whether provided value is a bus manager that is supported by this Transport Interface.

**Parameters**

**bus\_manager** (*Any*) – Value to check.

**Returns**

True if provided bus object is compatible with this Transport Interface, False otherwise.

**Return type**

*bool*

**abstract** **send\_packet**(*packet*)

Transmit UDS packet.

**Parameters**

**packet** (*uds.packet.AbstractUdsPacket*) – A packet to send.

**Returns**

Record with historic information about transmitted UDS packet.

**Return type**

*uds.packet.AbstractUdsPacketRecord*

**abstract** **receive\_packet**(*timeout=None*)

Receive UDS packet.

**Parameters**

**timeout** (*Optional[uds.utilities.TimeMillisecondsAlias]*) – Maximal time (in milliseconds) to wait.

**Raises**

**TimeoutError** – Timeout was reached.

**Returns**

Record with historic information about received UDS packet.

**Return type**

*uds.packet.AbstractUdsPacketRecord*

**abstract** **async\_send\_packet**(*packet, loop=None*)

Transmit UDS packet asynchronously.

**Parameters**

- **packet** (*uds.packet.AbstractUdsPacket*) – A packet to send.
- **loop** (*Optional[asyncio.AbstractEventLoop]*) – An asyncio event loop to use for scheduling this task.

**Returns**

Record with historic information about transmitted UDS packet.

**Return type**

*uds.packet.AbstractUdsPacketRecord*

**abstract** **async\_receive\_packet**(*timeout=None, loop=None*)

Receive UDS packet asynchronously.

**Parameters**

- **timeout** (*Optional[uds.utilities.TimeMillisecondsAlias]*) – Maximal time (in milliseconds) to wait.

- **loop** (*Optional[asyncio.AbstractEventLoop]*) – An asyncio event loop to use for scheduling this task.

**Raises**

- **TimeoutError** – Timeout was reached.
- **asyncio.TimeoutError** – Timeout was reached.

**Returns**

Record with historic information about received UDS packet.

**Return type**

`uds.packet.AbstractUdsPacketRecord`

**`uds.transport_interface.can_transport_interface`**


Definition and implementation of UDS Transport Interface for CAN bus.

**Module Contents****Classes**

<code>AbstractCanTransportInterface</code>	Abstract definition of Transport Interface for managing UDS on CAN bus.
<code>PyCanTransportInterface</code>	Transport Interface for managing UDS on CAN with python-can package as bus handler.

```
class uds.transport_interface.can_transport_interface.AbstractCanTransportInterface(can_bus_manager,
                                    address-
                                    dress-
                                    ing_information,
                                    **kwargs)
```

Bases: `uds.transport_interface.abstract_transport_interface.AbstractTransportInterface`



Abstract definition of Transport Interface for managing UDS on CAN bus.

CAN Transport Interfaces are meant to handle UDS middle layers (Transport and Network) on CAN bus.

Create Transport Interface (an object for handling UDS Transport and Network layers).

**Parameters**

- **can\_bus\_manager** (*Any*) – An object that handles CAN bus (Physical and Data layers of OSI Model).
- **addressing\_information** (`uds.can.AbstractCanAddressingInformation`) – Addressing Information of CAN Transport Interface.

- **kwargs** (*Any*) – Optional arguments that are specific for CAN bus.
  - **parameter n\_as\_timeout**  
Timeout value for *N\_As* time parameter.
  - **parameter n\_ar\_timeout**  
Timeout value for *N\_Ar* time parameter.
  - **parameter n\_bs\_timeout**  
Timeout value for *N\_Bs* time parameter.
  - **parameter n\_br**  
Value of *N\_Br* time parameter to use in communication.
  - **parameter n\_cs**  
Value of *N\_Cs* time parameter to use in communication.
  - **parameter n\_cr\_timeout**  
Timeout value for *N\_Cr* time parameter.
  - **parameter dlc**  
Base CAN DLC value to use for CAN Packets.
  - **parameter use\_data\_optimization**  
Information whether to use CAN Frame Data Optimization.
  - **parameter filler\_byte**  
Filler byte value to use for CAN Frame Data Padding.

**Raises**

**TypeError** – Provided Addressing Information value has unexpected type.  
**property segmenter: uds.segmentation.CanSegmenter**  
Value of the segmenter used by this CAN Transport Interface.

**Return type**

uds.segmentation.CanSegmenter

**property n\_as\_timeout: uds.utilities.TimeMillisecondsAlias**

Timeout value for N\_As time parameter.

**Return type**

uds.utilities.TimeMillisecondsAlias

**abstract property n\_as\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_As time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_ar\_timeout: uds.utilities.TimeMillisecondsAlias**

Timeout value for N\_Ar time parameter.

**Return type**

uds.utilities.TimeMillisecondsAlias

**abstract property n\_ar\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_Ar time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_bs\_timeout: uds.utilities.TimeMillisecondsAlias**

Timeout value for N\_Bs time parameter.

**Return type**

uds.utilities.TimeMillisecondsAlias

**abstract property n\_bs\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_Bs time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_br: uds.utilities.TimeMillisecondsAlias**

Get the value of N\_Br time parameter which is currently set.

---

**Note:** The actual (observed on the bus) value will be slightly longer as it also includes computation and CAN Interface delays.

---

**Return type**

uds.utilities.TimeMillisecondsAlias

**property n\_br\_max: uds.utilities.TimeMillisecondsAlias**

Get the maximum valid value of N\_Br time parameter.

**Warning:** To assess maximal value of *N\_Br*, the actual value of *N\_Ar* time parameter is required. Either the latest measured value of N\_Ar would be used, or 0ms would be assumed (if there are no measurement result).

**Return type**

uds.utilities.TimeMillisecondsAlias

**property n\_cs: uds.utilities.TimeMillisecondsAlias | None**

Get the value of N\_Cs time parameter which is currently set.

---

**Note:** The actual (observed on the bus) value will be slightly longer as it also includes computation and CAN Interface delays.

---

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_cs\_max: uds.utilities.TimeMillisecondsAlias**

Get the maximum valid value of N\_Cs time parameter.

**Warning:** To assess maximal value of *N\_Cs*, the actual value of *N\_As* time parameter is required. Either the latest measured value of N\_Ar would be used, or 0ms would be assumed (if there are no measurement result).

**Return type**

uds.utilities.TimeMillisecondsAlias

**property n\_cr\_timeout: uds.utilities.TimeMillisecondsAlias**

Timeout value for N\_Cr time parameter.

**Return type**

uds.utilities.TimeMillisecondsAlias

**abstract property n\_cr\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_Cr time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property addressing\_information: uds.can.AbstractCanAddressingInformation**

Addressing Information of Transport Interface.

**Warning:** Once the value is set, it must not be changed as it might cause communication problems.

**Return type**

uds.can.AbstractCanAddressingInformation

**property dlc: int**

Value of base CAN DLC to use for output CAN Packets.

---

**Note:** All output CAN Packets will have this DLC value set unless *CAN Frame Data Optimization* is used.

---

**Return type**

int

**property use\_data\_optimization: bool**

Information whether to use CAN Frame Data Optimization during CAN Packets creation.

**Return type**

bool

**property filler\_byte: int**

Filler byte value to use for output CAN Frame Data Padding during segmentation.

**Return type**

int

**N\_AS\_TIMEOUT: uds.utilities.TimeMillisecondsAlias = 1000**

Timeout value of *N\_As* time parameter according to ISO 15765-2.

**N\_AR\_TIMEOUT: uds.utilities.TimeMillisecondsAlias = 1000**

Timeout value of *N\_Ar* time parameter according to ISO 15765-2.

**N\_BS\_TIMEOUT: uds.utilities.TimeMillisecondsAlias = 1000**

Timeout value of *N\_Bs* time parameter according to ISO 15765-2.

**N\_CR\_TIMEOUT: uds.utilities.TimeMillisecondsAlias = 1000**

Timeout value of *N\_Cr* time parameter according to ISO 15765-2.

**DEFAULT\_N\_BR: uds.utilities.TimeMillisecondsAlias = 0**

Default value of *N\_Br* time parameter.

**DEFAULT\_N\_CS: uds.utilities.TimeMillisecondsAlias | None**

Default value of *N\_Cs* time parameter.

```
class uds.transport_interface.can_transport_interface.PyCanTransportInterface(can_bus_manager,
                                address-
                                ing_information,
                                **kwargs)
```

Bases: *AbstractCanTransportInterface*



Transport Interface for managing UDS on CAN with python-can package as bus handler.

---

**Note:** Documentation for python-can package: <https://python-can.readthedocs.io/>

---

Create python-can Transport Interface.

**Parameters**

- **can\_bus\_manager** (*can.BusABC*) – Python-can bus object for handling CAN.

<b>Warning:</b>	Bus must have capability of receiving transmitted frames (receive_own_messages=True set).
-----------------	---

- **addressing\_information** (*uds.can.AbstractCanAddressingInformation*) – Addressing Information of CAN Transport Interface.
- **kwargs** (*Any*) – Optional arguments that are specific for CAN bus.
  - **parameter n\_as\_timeout**  
Timeout value for *N\_As* time parameter.
  - **parameter n\_ar\_timeout**  
Timeout value for *N\_Ar* time parameter.
  - **parameter n\_bs\_timeout**  
Timeout value for *N\_Bs* time parameter.

- **parameter n\_br**  
Value of *N\_Br* time parameter to use in communication.
- **parameter n\_cs**  
Value of *N\_Cs* time parameter to use in communication.
- **parameter n\_cr\_timeout**  
Timeout value for *N\_Cr* time parameter.
- **parameter dlc**  
Base CAN DLC value to use for CAN Packets.
- **parameter use\_data\_optimization**  
Information whether to use CAN Frame Data Optimization.
- **parameter filler\_byte**  
Filler byte value to use for CAN Frame Data Padding.

**property n\_as\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_As time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_ar\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_Ar time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_bs\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N Bs time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**property n\_cr\_measured: uds.utilities.TimeMillisecondsAlias | None**

Get the last measured value of N\_Cr time parameter.

**Returns**

Time in milliseconds or None if the value was never measured.

**Return type**

Optional[uds.utilities.TimeMillisecondsAlias]

**\_MAX\_LISTENER\_TIMEOUT: float = 4280000.0**

Maximal timeout value accepted by python-can listeners.

**\_MIN\_NOTIFIER\_TIMEOUT: float = 1e-07**

Minimal timeout for notifiers that does not cause malfunctioning of listeners.

**\_\_del\_\_()**

Safely close all threads open by this object.

**\_teardown\_notifier(*suppress\_warning=False*)**

Stop and remove CAN frame notifier for synchronous communication.

**Parameters**

**suppress\_warning** (*bool*) – Do not warn about mixing Synchronous and Asynchronous implementation.

**Return type**

None

**\_teardown\_async\_notifier(*suppress\_warning=False*)**

Stop and remove CAN frame notifier for asynchronous communication.

**Parameters**

**suppress\_warning** (*bool*) – Do not warn about mixing Synchronous and Asynchronous implementation.

**Return type**

None

**\_setup\_notifier()**

Configure CAN frame notifier for synchronous communication.

**Return type**

None

**\_setup\_async\_notifier(*loop*)**

Configure CAN frame notifier for asynchronous communication.

**Parameters**

**loop** (*asyncio.AbstractEventLoop*) – An *asyncio* event loop to use.

**Return type**

None

**clear\_frames\_buffers()**

Clear buffers with transmitted and received frames.

**Warning:** This will cause that all CAN packets received in a past are no longer accessible.

**Return type**

None

**static is\_supported\_bus\_manager(*bus\_manager*)**

Check whether provided value is a bus manager that is supported by this Transport Interface.

**Parameters**

**bus\_manager** (*Any*) – Value to check.

**Returns**

True if provided bus object is compatible with this Transport Interface, False otherwise.

**Return type**

*bool*

**send\_packet(*packet*)**

Transmit CAN packet.

**Warning:** Must not be called within an asynchronous function.

**Parameters**

**packet** (`uds.packet.CanPacket`) – CAN packet to send.

**Returns**

Record with historic information about transmitted CAN packet.

**Return type**

`uds.packet.CanPacketRecord`

**receive\_packet(*timeout=None*)**

Receive CAN packet.

**Warning:** Must not be called within an asynchronous function.

**Parameters**

**timeout** (*Optional[uds.utilities.TimeMillisecondsAlias]*) – Maximal time (in milliseconds) to wait.

**Raises**

- **TypeError** – Provided timeout value is not None neither int nor float type.
- **ValueError** – Provided timeout value is less or equal 0.
- **TimeoutError** – Timeout was reached.

**Returns**

Record with historic information about received CAN packet.

**Return type**

`uds.packet.CanPacketRecord`

**async async\_send\_packet(*packet, loop=None*)**

Transmit CAN packet.

**Parameters**

- **packet** (`uds.packet.CanPacket`) – CAN packet to send.
- **loop** (*Optional[asyncio.AbstractEventLoop]*) – An asyncio event loop used for observing messages.

**Raises**

**TypeError** – Provided packet is not CAN Packet.

**Returns**

Record with historic information about transmitted CAN packet.

**Return type**

`uds.packet.CanPacketRecord`

**async async\_receive\_packet(*timeout=None, loop=None*)**

Receive CAN packet.

**Parameters**

- **timeout** (*Optional[uds.utilities.TimeMillisecondsAlias]*) – Maximal time (in milliseconds) to wait.
- **loop** (*Optional[asyncio.AbstractEventLoop]*) – An asyncio event loop used for observing messages.

**Raises**

- **TypeError** – Provided timeout value is not None neither int nor float type.
- **ValueError** – Provided timeout value is less or equal 0.
- **TimeoutError** – Timeout was reached.

**Returns**

Record with historic information about received CAN packet.

**Return type**

`uds.packet.CanPacketRecord`

**uds.utilities**

Various helper functions, classes and variables that are shared and reused within the project.

**Submodules****uds.utilities.bytes\_operations**

Module with bytes list operations implementation.

**Module Contents****Classes**


<code>Endianness</code>	Endianness values definitions.
-------------------------	--------------------------------

**Functions**

<code>bytes_list_to_int(bytes_list[, endianness])</code>	Convert a list of bytes to integer value.
<code>int_to_bytes_list(int_value[, list_size, endian-ness])</code>	Convert integer value to a list of bytes.

**class uds.utilities.bytes\_operations.Endianness**

Bases: `aenum.StrEnum`, `uds.utilities.enums.ValidatedEnum`

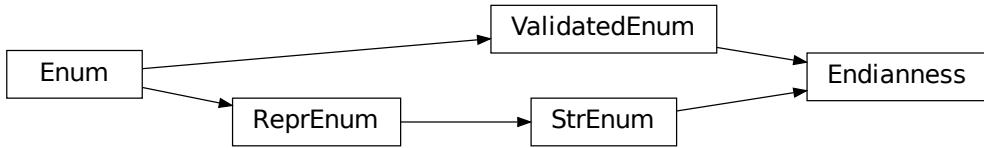

Endianness values definitions.

`Endianness` determines order of bytes in a bytes sequence.

Initialize self. See `help(type(self))` for accurate signature.

**LITTLE\_ENDIAN:** `Endianness = 'little'`

Little Endian stores the most significant byte at the largest memory address and the least significant byte at the smallest.

**BIG\_ENDIAN:** `Endianness = 'big'`

Big Endian stores the most significant byte at the smallest memory address and the least significant byte at the largest.

`uds.utilities.bytes_operations.bytes_list_to_int(bytes_list, endianness=Endianness.BIG_ENDIAN)`

Convert a list of bytes to integer value.

#### Parameters

- `bytes_list` (`uds.utilities.common_types.RawBytesAlias`) – List of bytes to convert.
- `endianness` (`Endianness`) – Order of bytes to use.

#### Returns

The integer value represented by provided list of bytes.

#### Return type

`int`

`uds.utilities.bytes_operations.int_to_bytes_list(int_value, list_size=None, endianness=Endianness.BIG_ENDIAN)`

Convert integer value to a list of bytes.

#### Parameters

- `int_value` (`int`) – Integer value to convert.
- `list_size` (`Optional[int]`) – Size of the output list. Use `None` to use the smallest possible list size.
- `endianness` (`Endianness`) – Order of bytes to use.

#### Raises

- `TypeError` – At least one provided value has invalid type.
- `ValueError` – At least one provided value is out of range.
- `InconsistentArgumentsError` – Provided value of `list_size` is too small to contain entire `int_value`.

- **NotImplementedError** – There is missing implementation for the provided Endianess. Please create an issue in our [Issues Tracking System](#) with detailed description if you face this error.

**Returns**

The value of bytes list that represents the provided integer value.

**Return type**

uds.utilities.common\_types.RawBytesListAlias

**uds.utilities.common\_types**

Module with all common types (and its aliases) used in the package and helper functions for these types.

**Module Contents****Functions**

<code>validate_nibble(value)</code>	Validate whether provided value stores a nibble value.
<code>validate_raw_byte(value)</code>	Validate whether provided value stores a raw byte value.
<code>validate_raw_bytes(value[, allow_empty])</code>	Validate whether provided value stores raw bytes value.

**Attributes**

<code>TimeMillisecondsAlias</code>	Alias of a time value in milliseconds.
<code>RawBytesTupleAlias</code>	Alias of a tuple filled with byte values.
<code>RawBytesSetAlias</code>	Alias of a set filled with byte values.
<code>RawBytesListAlias</code>	Alias of a list filled with byte values.
<code>RawBytesAlias</code>	Alias of a sequence filled with byte values.

**uds.utilities.common\_types.TimeMillisecondsAlias**

Alias of a time value in milliseconds.

**uds.utilities.common\_types.RawBytesTupleAlias**

Alias of a tuple filled with byte values.

**uds.utilities.common\_types.RawBytesSetAlias**

Alias of a set filled with byte values.

**uds.utilities.common\_types.RawBytesListAlias**

Alias of a list filled with byte values.

**uds.utilities.common\_types.RawBytesAlias**

Alias of a sequence filled with byte values.

**uds.utilities.common\_types.validate\_nibble(*value*)**

Validate whether provided value stores a nibble value.

**Parameters**

**value** (*int*) – Value to validate.

**Raises**

- **TypeError** – Value is not int type.
- **ValueError** – Value is out of byte range (0x0-0xF).

**Return type**

None

`uds.utilities.common_types.validate_raw_byte(value)`

Validate whether provided value stores a raw byte value.

**Parameters**

- **value (int)** – Value to validate.

**Raises**

- **TypeError** – Value is not int type.
- **ValueError** – Value is out of byte range (0x00-0xFF).

**Return type**

None

`uds.utilities.common_types.validate_raw_bytes(value, allow_empty=False)`

Validate whether provided value stores raw bytes value.

**Parameters**

- **value (RawBytesAlias)** – Value to validate.
- **allow\_empty (bool)** – True if empty list is allowed, False otherwise.

**Raises**

- **TypeError** – Value is not tuple or list type.
- **ValueError** – Value does not contain raw bytes (int value between 0x00-0xFF) only.

**Return type**

None

`uds.utilities.custom_exceptions`

Custom exception that are used within the project.

## Module Contents

`exception uds.utilities.custom_exceptions.ReassignmentError`

Bases: `Exception`

ReassignmentError

An attempt to set a new value to an unchangeable attribute.

**Example:**

Objects of class X are initialized with an attribute const\_x that must not be changed after the object creation (outside `__init__` method).

`ReassignmentError` would be raised when a user tries to change the value of `const_x` attribute after the object is initialized.

Initialize `self`. See `help(type(self))` for accurate signature.

**exception** `uds.utilities.custom_exceptions.InconsistentArgumentsError`

Bases: `ValueError`

InconsistentArgumentsError

Provided arguments values are not compatible with each other.

**Example:**

A function takes two parameters: `a, b`

Let's assume that the function requires that:  $a > b$

The function would raise `InconsistentArgumentsError` when values of `a` and `b` are not satisfying the requirement ( $a > b$ ), e.g.  $a = 0, b = 1$ .

Initialize `self`. See `help(type(self))` for accurate signature.

**exception** `uds.utilities.custom_exceptions.UnusedArgumentError`

Bases: `ValueError`

UnusedArgumentError

At least one argument (that was provided by user) will be ignored.

**Example:**

A function takes two parameters: `a, b`

Let's assume that parameter `a` must always be provided. Parameter `b` is used only when `a == 1`.

The function would raise this exception when both parameters are provided but `a != 1`.

Initialize `self`. See `help(type(self))` for accurate signature.

**exception** `uds.utilities.custom_exceptions.AmbiguityError`

Bases: `ValueError`

## AmbiguityError

Operation cannot be executed because it is ambiguous.

Initialize self. See help(type(self)) for accurate signature.

## uds.utilities.custom\_warnings

Custom warnings that are used within the project.

### Module Contents

#### exception uds.utilities.custom\_warnings.UnusedArgumentWarning

Bases: Warning

## UnusedArgumentWarning

At least one argument (that was provided by user) will be ignored.

It is meant to be used in less strict situation than [\*UnusedArgumentError\*](#).

#### Example:

A function takes two parameters: a, b

Let's assume that parameter *a* must always be provided. Parameter *b* is used only when *a == 1*.

The function would warn (using this warning) when both parameters are provided but *a != 1*.

Initialize self. See help(type(self)) for accurate signature.

#### exception uds.utilities.custom\_warnings.ValueWarning

Bases: Warning

## ValueWarning

Value of the argument is out of typical range, but the package is able to handle it.

Initialize self. See help(type(self)) for accurate signature.

## uds.utilities.enums

Module with common and reused implementation of enums.

Enumerated types (enums) are data types that consists of named values. This module provides extension to `aenum` package.


### Module Contents

#### Classes

<code>ExtendableEnum</code>	Enum that supports new members adding.
<code>ValidatedEnum</code>	Enum that supports members validation.
<code>ByteEnum</code>	Enum which members are one byte integers (0x00-0xFF) only.
<code>NibbleEnum</code>	Enum which members are one nibble (4 bits) integers (0x0-0xF) only.

#### `class uds.utilities.enums.ExtendableEnum`

Bases: `aenum.Enum`



Enum that supports new members adding.

#### `classmethod add_member(name, value)`

Register a new member.

##### Parameters

- `name (str)` – Name of a new member.
- `value (Any)` – Value of a new member.

##### Raises

`ValueError` – Such name or value is already in use.

##### Returns

The new member that was just created.

##### Return type

`aenum.Enum`

```
class uds.utilities.enums.ValidatedEnum
```

Bases: `aenum.Enum`



Enum that supports members validation.

**classmethod `is_member(value)`**

Check whether given argument is a member or a value stored by this Enum.

**Parameters**

`value (Any)` – Value to check.

**Returns**

True if given argument is a member or a value of this Enum, else False.

**Return type**

`bool`

**classmethod `validate_member(value)`**

Validate whether given argument is a member or a value stored by this Enum.

**Parameters**

`value (Any)` – Value to validate.

**Raises**

`ValueError` – Provided value is not a member neither a value of this Enum.

**Return type**

`ValidatedEnum`

```
class uds.utilities.enums.ByteEnum
```

Bases: `aenum.IntEnum`



Enum which members are one byte integers (0x00-0xFF) only.

Initialize self. See `help(type(self))` for accurate signature.

```
class uds.utilities.enums.NibbleEnum
```

Bases: `aenum.IntEnum`



Enum which members are one nibble (4 bits) integers (0x0-0xF) only.

Initialize self. See help(type(self)) for accurate signature.

#### 4.1.2 Package Contents

```
uds.__version__ = '0.3.0'  
uds.__author__ = 'Maciej Dąbrowski'  
uds.__maintainer__ = 'Maciej Dąbrowski'  
uds.__credits__ = ['Maciej Dąbrowski  
(https://www.linkedin.com/in/maciej-dabrowski-test-engineer/)', 'Merit...  
uds.__email__ = 'uds-package-development@googlegroups.com'  
uds.__license__ = 'MIT'
```



---

## UDS KNOWLEDGE BASE

If you are not an UDS expert, this part of documentation is created for you. It is meant to provide a technical support for every user of [UDS package](#) so you can better understand the code, but also UDS protocol itself.

### 5.1 UDS OSI Model

Overview of UDS [OSI model](#).

#### 5.1.1 UDS Standards

UDS is defined by multiple standards which are the main source of information and requirements about this protocol. Full list of standards is included in the table below:

OSI Layer	Common	CAN	FlexRay	Ethernet	K-Line	LIN
Layer 7 Application	ISO 14229-1 ISO 27145-3	ISO 14229-3	ISO 14229-4	ISO 14229-5	ISO 14229-6	ISO 14229-7
Layer 6 Presentation	ISO 27145-2					
Layer 5 Session	ISO 14229-2					
Layer 4 Transport	ISO 27145-4	ISO 15765-2	ISO 10681-2	ISO 13400-2	Not applicable	ISO 17987-2
Layer 3 Network						
Layer 2 Data		ISO 11898-1	ISO 17458-2	ISO 13400-3	ISO 14230-2	ISO 17987-3
Layer 1 Physical		ISO 11898-2 ISO 11898-3	ISO 17458-4		ISO 14230-1	ISO 17987-4

Where:

- OSI Layer - OSI Model Layer for which standards are relevant
- Common - standards mentioned in this column are always relevant for UDS communication regardless of bus used
- CAN - standards which are specific for UDS on CAN implementation
- FlexRay - standards which are specific for UDS on FlexRay implementation
- Ethernet - standards which are specific for UDS on IP implementation
- K-Line - standards which are specific for UDS on K-Line implementation

- LIN - standards which are specific for UDS on LIN implementation

### 5.1.2 UDS Functionalities

An overview of features that are required to fully implement UDS protocol is presented in the table below:

OSI Layer	Functionalities	Implementation
Layer 7 Application	<ul style="list-style-type: none"><li>• diagnostic messages support</li></ul>	<ul style="list-style-type: none"><li>• <code>uds.message</code></li></ul>
Layer 6 Presentation	<ul style="list-style-type: none"><li>• diagnostic messages data interpretation</li><li>• messaging database import from a file</li><li>• messaging database export to a file</li></ul>	<i>To be provided with Database feature.</i>
Layer 5 Session	<ul style="list-style-type: none"><li>• Client simulation</li><li>• Server simulation</li></ul>	<i>To be provided with Client feature.</i> <i>To be provided with Server feature.</i>
Layer 4 Transport	<ul style="list-style-type: none"><li>• UDS packet support</li><li>• bus specific segmentation</li><li>• bus specific packets transmission</li></ul>	<ul style="list-style-type: none"><li>• <code>uds.packet</code></li><li>• <code>uds.segmentation</code></li><li>• <code>uds.transport_interface</code></li><li>• <code>uds.can</code></li></ul>
Layer 3 Network		<i>To be extended with support for:</i> <ul style="list-style-type: none"><li>• Ethernet</li><li>• LIN</li><li>• K-Line</li><li>• FlexRay</li></ul>
Layer 2 Data	<ul style="list-style-type: none"><li>• frames transmission</li><li>• frames receiving</li></ul>	External python packages for bus handling: <ul style="list-style-type: none"><li>• CAN:</li><li>• <code>python-can</code></li></ul>
Layer 1 Physical		<i>More packages handling other buses to be decided.</i>

Where:

- OSI Layer - considered OSI Model Layer
- Functionalities - functionalities required in the implementation to handle considered UDS OSI layer
- Implementation - UDS package implementation that provides mentioned functionalities

### 5.1.3 Protocol Data Units

Each layer of OSI Model defines their own **Protocol Data Unit (PDU)**. To make things simpler for the users and our developers, in the implementation we distinguish following PDUs:

- Application Protocol Data Unit (A\_PDU) - called *diagnostic message* or *UDS Message* in the implementation and documentation. More information about A\_PDU can be found in:
  - *knowledge base section - diagnostic message*
  - *implementation - diagnostic message*
- Network Protocol Data Unit (N\_PDU) - called *UDS packet* in the implementation and documentation. More information about N\_PDU can be found in:
  - *knowledge base section - UDS packet*
  - *implementation - uds.packet*
- Data Protocol Data Unit (D\_PDU) - called *frame* in the implementation and documentation. We do not have any internal *frames* documentation. Implementation of frames is usually provided by external packages.

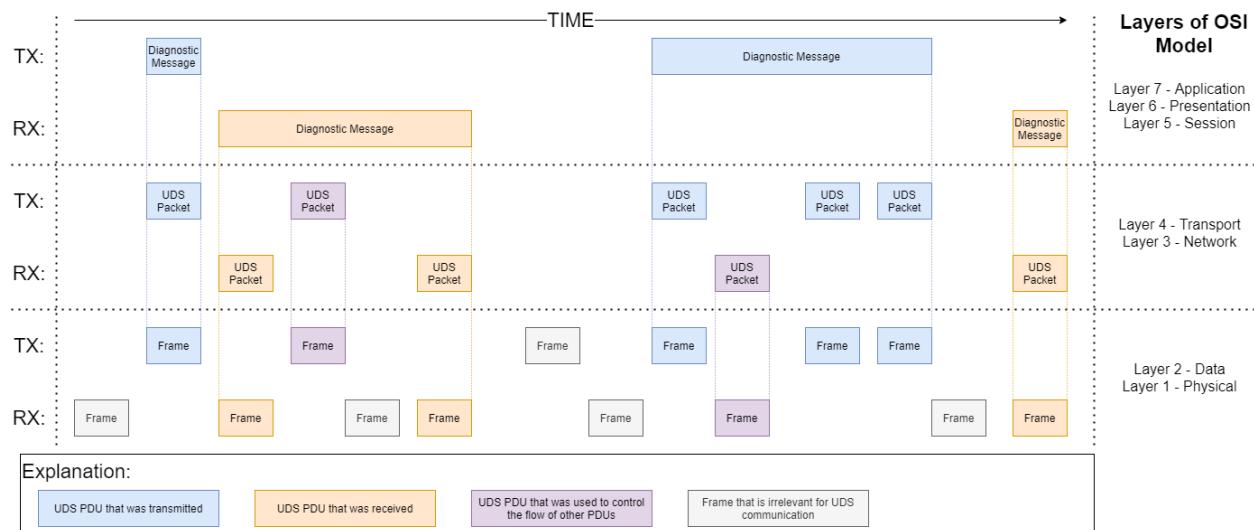


Fig. 1: UDS Protocol Data Units on different layers of OSI Model.

## 5.2 Diagnostic Message

Messages that are exchanged by clients and servers during UDS communications are usually called *diagnostic messages*. In the documentation and the implementation, *UDS message* name is also in use.

We distinguish two types of diagnostic messages depending on who is a transmitter:

- *diagnostic request*
- *diagnostic response*

UDS communication is always initiated by a client who sends a *diagnostic request* to a network that it has direct connection with. The client might not be directly connected to a desired recipient(s) of the request, therefore some servers might be forced to act as gateways and transmit the request to another sub-network(s). Servers' decision (whether to redirect a message to another sub-network) depends on a target(s) of the request i.e. server shall transmit the request to the sub-network if this is a route (not necessarily a direct one) to at least one recipient of the message.

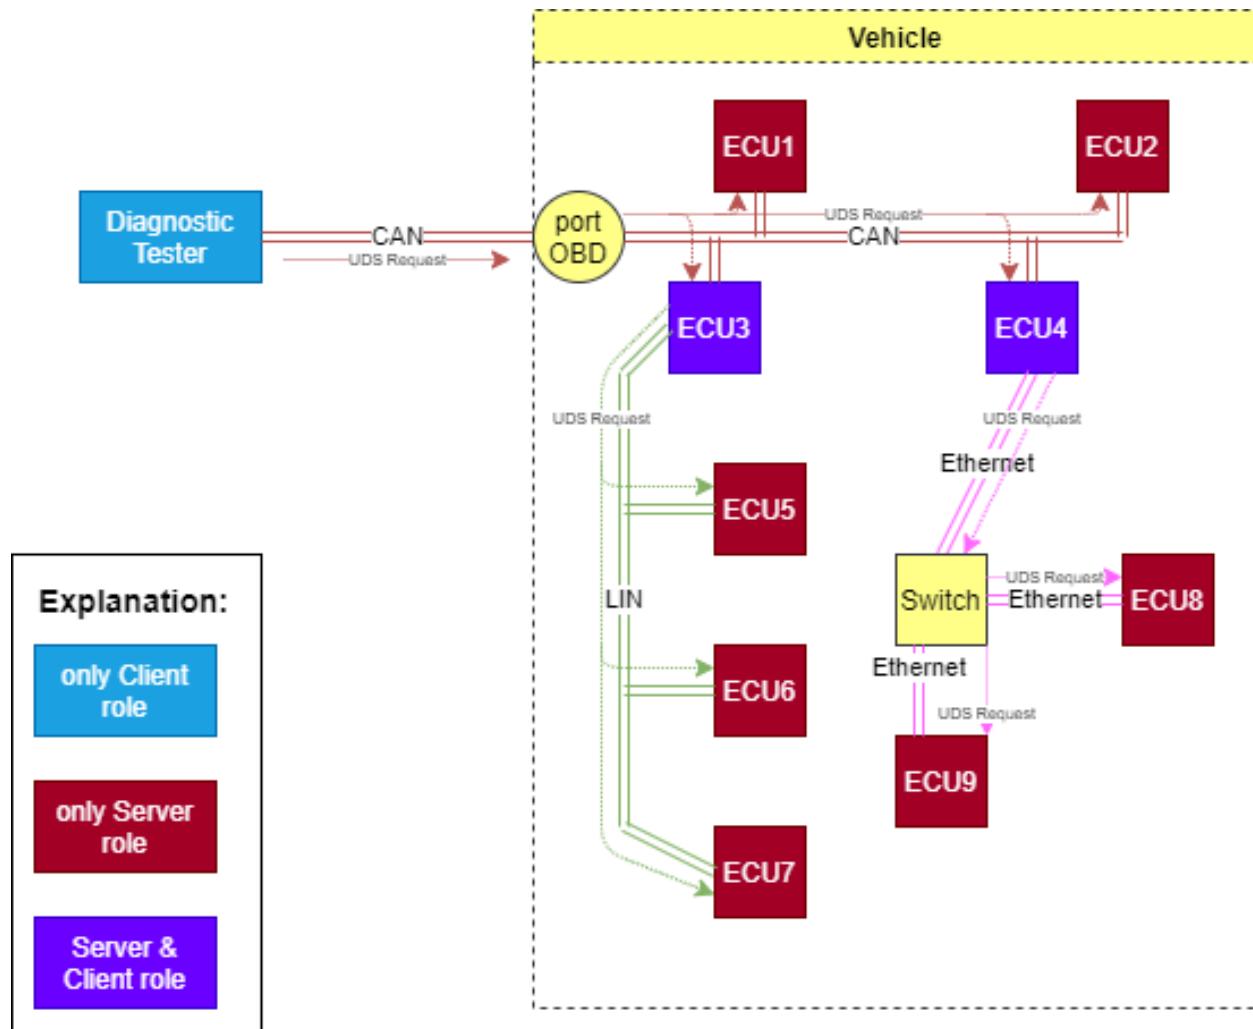


Fig. 2: Diagnostic request routing in example vehicle networks.  
In this example all ECUs in the vehicle are the targets of the request - functionally addressed request was sent.

Each server which was the recipient of the request, might decide to send a response back to the nearest client (the one which previously transmitted the request in this sub-network). Then, the client shall act as a gateway again and redirect the response back until it reaches the request message originator (Diagnostic Tester).

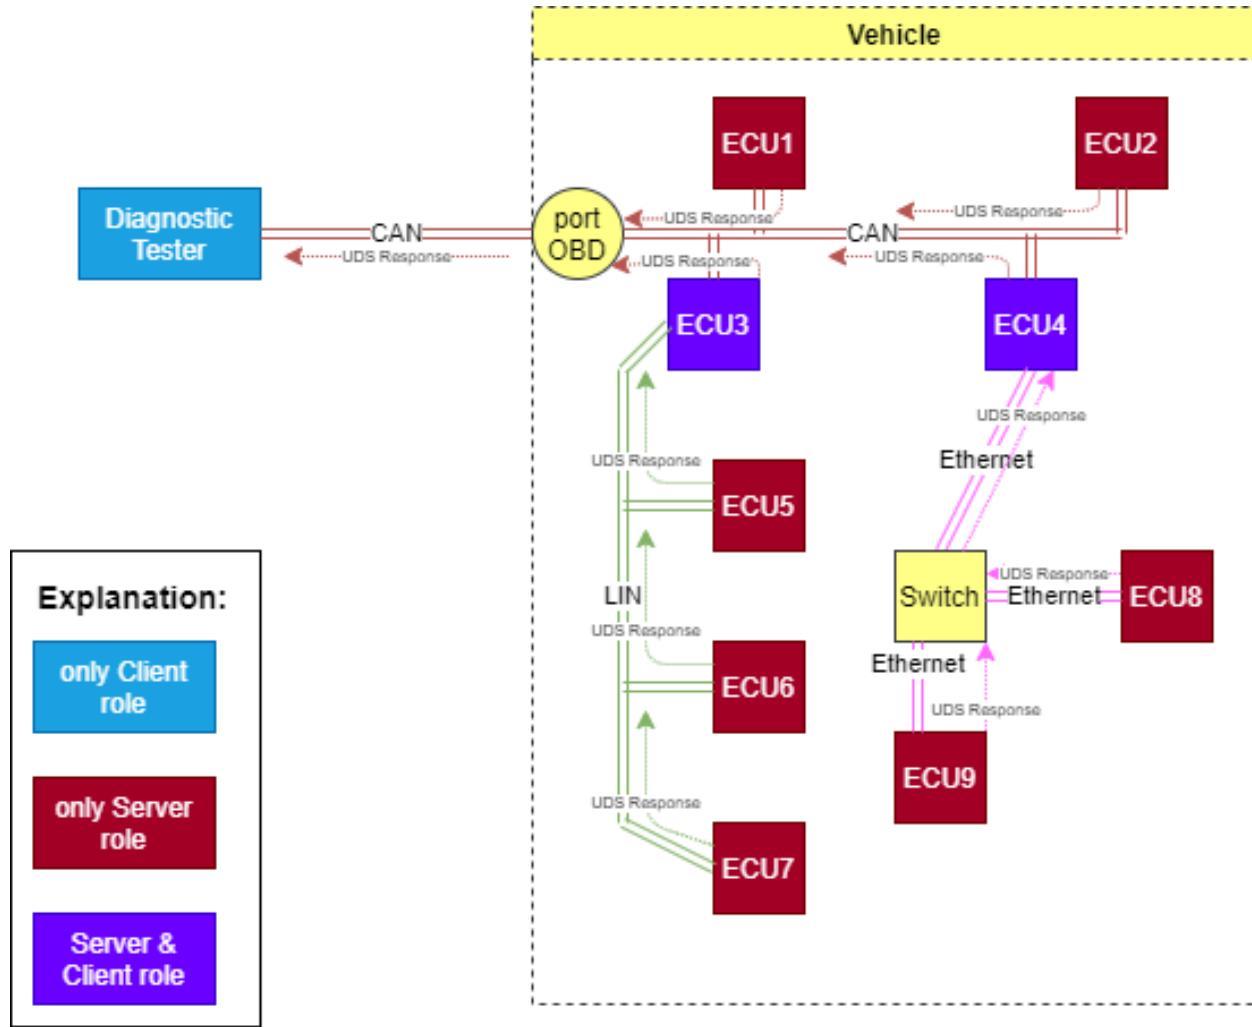


Fig. 3: Diagnostic responses routing in example vehicle networks.  
In this example all ECUs in the vehicle responds to the request.

### 5.2.1 Diagnostic Request

Diagnostic request is a *diagnostic message* that was transmitted by a client and targets a server or group of servers. Diagnostic request can be identified by its *Service Identifier* (SID) value.

## 5.2.2 Diagnostic Response

Diagnostic response is a *diagnostic message* that was transmitted by a server and targets a client. Diagnostic response can be identified by its *Service Identifier* (SID) value.

UDS defines two formats of diagnostic responses:

- *positive response message*
- *negative response message*

### Positive Response Message

If a server responds with a positive response message, it means that the server received the corresponding request message and executed actions requested by a client.

Format of positive response messages:

Byte	Description	Value
1	Response SID	SID + 0x40
2	data-parameter#1	XX
...	...	...
n	data-parameter#n	XX

Where:

- SID - *Service Identifier* value that was received in the request message to which the server responded
- XX - any byte value

---

**Note:** When positive diagnostic message is received, this equation is always true:

$$\text{RSID} = \text{SID} + \text{0x40}$$

---

### Negative Response Message

If a server responds with a negative response message, it means that (for some reason) the server could not execute actions requested by a client.

Format of negative response messages:

Byte	Description	Value
1	Negative Response SID	0x7F
2	Request SID	SID
3	NRC	XX

Where:

- SID - *Service Identifier* value that was received in the request message to which the server responded
- NRC - *Negative Response Code* value that identified the reason for negative response

### 5.2.3 Service Identifier

Service Identifier (SID) is data parameter that is always located in the first Application Data (A\_Data) byte of each *diagnostic message*. SID value determines whether the message is *diagnostic request* or *diagnostic response*. General purpose (application) and format of *diagnostic message* is also by determined by SID value.

#### List of all Service Identifier (SID) values and their application:

- 0x00 - not applicable, reserved by ISO 14229-1
- 0x01-0x0F - ISO 15031-5/SAE J1979 specific services
- 0x10 - *DiagnosticSessionControl* service request
- 0x11 - *ECUReset* service request
- 0x12-0x13 - reserved by ISO 14229-1
- 0x14 - *ClearDiagnosticInformation* service request
- 0x15-0x18 - reserved by ISO 14229-1
- 0x19 - *ReadDTCInformation* service request
- 0x1A-0x21 - reserved by ISO 14229-1
- 0x22 - *ReadDataByIdentifier* service request
- 0x23 - *ReadMemoryByAddress* service request
- 0x24 - *ReadScalingDataByIdentifier* service request
- 0x25-0x26 - reserved by ISO 14229-1
- 0x27 - *SecurityAccess* service request
- 0x28 - *CommunicationControl* service request
- 0x29 - *Authentication* service request
- 0x2A - *ReadDataByPeriodicIdentifier* service request
- 0x2B - reserved by ISO 14229-1
- 0x2C - *DynamicallyDefineDataIdentifier* service request
- 0x2D - reserved by ISO 14229-1
- 0x2E - *WriteDataByIdentifier* service request
- 0x2F - *InputOutputControlByIdentifier* service request
- 0x30 - reserved by ISO 14229-1
- 0x31 - *RoutineControl* service request
- 0x32-0x33 - reserved by ISO 14229-1
- 0x34 - *RequestDownload* service request
- 0x35 - *RequestUpload* service request
- 0x36 - *TransferData* service request
- 0x37 - *RequestTransferExit* service request
- 0x38 - *RequestFileTransfer* service request
- 0x39-0x3C - reserved by ISO 14229-1

- 0x3D - *WriteMemoryByAddress* service request
- 0x3E - *TesterPresent* service request
- 0x3F - not applicable, reserved by ISO 14229-1
- 0x40 - not applicable, reserved by ISO 14229-1
- 0x41-0x4F - ISO 15031-5/SAE J1979 specific services
- 0x50 - positive response to *DiagnosticSessionControl* service
- 0x51 - positive response to *ECUReset* service
- 0x52-0x53 - reserved by ISO 14229-1
- 0x54 - positive response to *ClearDiagnosticInformation* service
- 0x55-0x58 - reserved by ISO 14229-1
- 0x59 - positive response to *ReadDTCInformation* service
- 0x5A-0x61 - reserved by ISO 14229-1
- 0x62 - positive response to *ReadDataByIdentifier* service
- 0x63 - positive response to *ReadMemoryByAddress* service
- 0x64 - positive response to *ReadScalingDataByIdentifier* service
- 0x65-0x66 - reserved by ISO 14229-1
- 0x67 - positive response to *SecurityAccess* service
- 0x68 - positive response to *CommunicationControl* service
- 0x69 - positive response to *Authentication* service
- 0x6A - positive response to *ReadDataByPeriodicIdentifier* service
- 0x6B - reserved by ISO 14229-1
- 0x6C - positive response to *DynamicallyDefineDataIdentifier* service
- 0x6D - reserved by ISO 14229-1
- 0x6E - positive response to *WriteDataByIdentifier* service
- 0x6F - positive response to *InputOutputControlByIdentifier* service
- 0x70 - reserved by ISO 14229-1
- 0x71 - positive response to *RoutineControl* service
- 0x72-0x73 - reserved by ISO 14229-1
- 0x74 - positive response to *RequestDownload* service
- 0x75 - positive response to *RequestUpload* service
- 0x76 - positive response to *TransferData* service
- 0x77 - positive response to *RequestTransferExit* service
- 0x78 - positive response to *RequestFileTransfer* service
- 0x79-0x7C - reserved by ISO 14229-1
- 0x7D - positive response to *WriteMemoryByAddress* service
- 0x7E - positive response to *TesterPresent* service

- 0x7F - negative response service identifier
- 0x80-0x82 - not applicable, reserved by ISO 14229-1
- 0x83 - reserved by ISO 14229-1
- 0x84 - *SecuredDataTransmission* service request
- 0x85 - *ControlDTCSetting* service request
- 0x86 - *ResponseOnEvent* service request
- 0x87 - *LinkControl* service request
- 0x88 - reserved by ISO 14229-1
- 0x89-0xB9 - not applicable, reserved by ISO 14229-1
- 0xBA-0xBE - system supplier specific service requests
- 0xBF-0xC2 - not applicable, reserved by ISO 14229-1
- 0xC3 - reserved by ISO 14229-1
- 0xC4 - positive response to *SecuredDataTransmission* service
- 0xC5 - positive response to *ControlDTCSetting* service
- 0xC6 - positive response to *ResponseOnEvent* service
- 0xC7 - positive response to *LinkControl* service
- 0xC8 - reserved by ISO 14229-1
- 0xC9-0xF9 - not applicable, reserved by ISO 14229-1
- 0xFA-0xFE - positive responses to system supplier specific requests
- 0xFF - not applicable, reserved by ISO 14229-1

## DiagnosticSessionControl

DiagnosticSessionControl service is used to change diagnostic sessions in the server(s). In each diagnostic session a different set of diagnostic services (and/or functionalities) is enabled in the server. Server shall always be in exactly one diagnostic session.

## ECUReset

ECUReset service is used by the client to request a server reset.

## ClearDiagnosticInformation

ClearDiagnosticInformation service is used by the client to clear all diagnostic information (DTC and related data) in one or multiple servers' memory.

## **ReadDTCInformation**

ReadDTCInformation service allows the client to read from any server or group of servers within a vehicle, current information about all Diagnostic Trouble Codes. This could be a status of reported Diagnostic Trouble Code (DTC), number of currently active DTCs or any other information returned by supported ReadDTCInformation SubFunctions.

## **ReadDataByIdentifier**

ReadDataByIdentifier service allows the client to request data record values from the server identifier by one or more DataIdentifiers (DIDs).

## **ReadMemoryByAddress**

ReadMemoryByAddress service allows the client to request server's memory data stored under provided memory address.

## **ReadScalingDataByIdentifier**

ReadScalingDataByIdentifier service allows the client to request from the server a scaling data record identified by a DataIdentifier (DID). The scaling data contains information such as data record type (e.g. ASCII, signed float), formula and its coefficients used for value calculation, units, etc.

## **SecurityAccess**

SecurityAccess service allows the client to unlock functions/services with restricted access.

## **CommunicationControl**

CommunicationControl service allows the client to switch on/off the transmission and/or the reception of certain messages on a server(s).

## **Authentication**

Authentication service provides a means for the client to prove its identity, allowing it to access data and/or diagnostic services, which have restricted access for, for example security, emissions, or safety reasons.

## **ReadDataByPeriodicIdentifier**

ReadDataByPeriodicIdentifier service allows the client to request the periodic transmission of data record values from the server identified by one or more periodicDataIdentifiers.

## DynamicallyDefineDataIdentifier

DynamicallyDefineDataIdentifier service allows the client to dynamically define in a server a DataIdentifier (DID) that can be read via the [ReadDataByIdentifier](#) service at a later time.

## WriteDataByIdentifier

WriteDataByIdentifier service allows the client to write information into the server at an internal location specified by the provided DataIdentifier (DID).

## InputOutputControlByIdentifier

InputOutputControlByIdentifier service allows the client to substitute a value for an input signal, internal server function and/or force control to a value for an output (actuator) of an electronic system.

## RoutineControl

RoutineControl service allows the client to execute a defined sequence of steps to obtain any relevant result. There is a lot of flexibility with this service, but typical usage may include functionality such as erasing memory, resetting or learning adaptive data, running a self-test, overriding the normal server control strategy.

## RequestDownload

RequestDownload service allows the client to initiate a data transfer from the client to the server (download).

## RequestUpload

RequestUpload service allows the client to initiate a data transfer from the server to the client (upload).

## TransferData

TransferData service is used by the client to transfer data either from the client to the server (download) or from the server to the client (upload).

## RequestTransferExit

RequestTransferExit service is used by the client to terminate a data transfer between the client and server.

## RequestFileTransfer

RequestFileTransfer service allows the client to initiate a file data transfer either from the server to the client (upload) or from the server to the client (upload).

### **WriteMemoryByAddress**

WriteMemoryByAddress service allows the client to write information into server's memory data under provided memory address.

### **TesterPresent**

TesterPresent service is used by the client to indicate to a server(s) that the client is still connected to a vehicle and certain diagnostic services and/or communication that have been previously activated are to remain active.

### **SecuredDataTransmission**

SecuredDataTransmission service is applicable if a client intends to use diagnostic services defined in this document in a secured mode. It may also be used to transmit external data, which conform to some other application protocol, in a secured mode between a client and a server. A secured mode in this context means that the data transmitted is protected by cryptographic methods.

### **ControlDTCSetting**

ControlDTCSetting service allows the client to stop or resume the updating of DTC status bits in the server(s) memory.

### **ResponseOnEvent**

ResponseOnEvent service allows the client to request from the server to start or stop transmission of responses on a specified event.

### **LinkControl**

LinkControl service allows the client to control the communication between the client and the server(s) in order to gain bus bandwidth for diagnostic purposes (e.g. programming).

## **5.2.4 Negative Response Code**

Negative Response Code (NRC) is one byte value which contains information why a server is not sending a positive response message.

#### **List of NRC values:**

- 0x00 - positiveResponse - This NRC shall not be used in a negative response message. This positiveResponse parameter value is reserved for server internal implementation.
- 0x00-0x0F - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x10 - generalReject - This NRC indicates that the requested action has been rejected by the server.
- 0x11 - serviceNotSupported - This NRC indicates that the requested action will not be taken because the server does not support the requested service.
- 0x12 - SubFunctionNotSupported - This NRC indicates that the requested action will not be taken because the server does not support the service specific parameters of the request message.

- 0x13 - incorrectMessageLengthOrInvalidFormat - This NRC indicates that the requested action will not be taken because the length of the received request message does not match the prescribed length for the specified service or the format of the parameters do not match the prescribed format for the specified service.
- 0x14 - responseTooLong - This NRC shall be reported by the server if the response to be generated exceeds the maximum number of bytes available by the underlying network layer. This could occur if the response message exceeds the maximum size allowed by the underlying transport protocol or if the response message exceeds the server buffer size allocated for that purpose.
- 0x15-0x20 - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x21 - busyRepeatRequest - This NRC indicates that the server is temporarily too busy to perform the requested operation. In this circumstance the client shall perform repetition of the “identical request message” or “another request message”. The repetition of the request shall be delayed by a time specified in the respective implementation documents.
- 0x22 - conditionsNotCorrect - This NRC indicates that the requested action will not be taken because the server prerequisite conditions are not met.
- 0x23 - ISO Reserved - This value is reserved for future definition by ISO 14229 Standard.
- 0x24 - requestSequenceError - This NRC indicates that the requested action will not be taken because the server expects a different sequence of request messages or message as sent by the client. This may occur when sequence sensitive requests are issued in the wrong order.
- 0x25 - noResponseFromSubnetComponent - This NRC indicates that the server has received the request but the requested action could not be performed by the server as a subnet component which is necessary to supply the requested information did not respond within the specified time.
- 0x26 - FailurePreventsExecutionOfRequestedAction - This NRC indicates that the requested action will not be taken because a failure condition, identified by a DTC (with at least one DTC status bit for TestFailed, Pending, Confirmed or TestFailedSinceLastClear set to 1), has occurred and that this failure condition prevents the server from performing the requested action.
- 0x27-0x30 - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x31 - requestOutOfRange - This NRC indicates that the requested action will not be taken because the server has detected that the request message contains a parameter which attempts to substitute a value beyond its range of authority (e.g. attempting to substitute a data byte of 111 when the data is only defined to 100), or which attempts to access a DataIdentifier/RoutineIdentifier that is not supported or not supported in active session.
- 0x32 - ISO Reserved - This value is reserved for future definition by ISO 14229 Standard.
- 0x33 - securityAccessDenied - This NRC indicates that the requested action will not be taken because the server’s security strategy has not been satisfied by the client.
- 0x34 - authenticationRequired - This NRC indicates that the requested service will not be taken because the client has insufficient rights based on its Authentication state.
- 0x35 - invalidKey - This NRC indicates that the server has not given security access because the key sent by the client did not match with the key in the server’s memory. This counts as an attempt to gain security.
- 0x36 - exceedNumberOfAttempts - This NRC indicates that the requested action will not be taken because the client has unsuccessfully attempted to gain security access more times than the server’s security strategy will allow.
- 0x37 - requiredTimeDelayNotExpired - This NRC indicates that the requested action will not be taken because the client’s latest attempt to gain security access was initiated before the server’s required timeout period had elapsed.

- 0x38 - secureDataTransmissionRequired - This NRC indicates that the requested service will not be taken because the requested action is required to be sent using a secured communication channel.
- 0x39 - secureDataTransmissionNotAllowed - This NRC indicates that this message was received using the SecuredDataTransmission (SID 0x84) service. However, the requested action is not allowed to be sent using the SecuredDataTransmission (0x84) service.
- 0x3A - secureDataVerificationFailed - This NRC indicates that the message failed in the security sub-layer.
- 0x3B-0x4F - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x50 - Certificate verification failed, Invalid Time Period - Date and time of the server does not match the validity period of the Certificate.
- 0x51 - Certificate verification failed, Invalid Signature - Signature of the Certificate could not be verified.
- 0x52 - Certificate verification failed, Invalid Chain of Trust - Certificate could not be verified against stored information about the issuing authority.
- 0x53 - Certificate verification failed, Invalid Type - Certificate does not match the current requested use case.
- 0x54 - Certificate verification failed, Invalid Format - Certificate could not be evaluated because the format requirement has not been met.
- 0x55 - Certificate verification failed, Invalid Content - Certificate could not be verified because the content does not match.
- 0x56 - Certificate verification failed, Invalid Scope - The scope of the Certificate does not match the contents of the server.
- 0x57 - Certificate verification failed, Invalid Certificate (revoked) - Certificate received from client is invalid, because the server has revoked access for some reason.
- 0x58 - Ownership verification failed - Delivered Ownership does not match the provided challenge or could not be verified with the own private key.
- 0x59 - Challenge calculation failed - The challenge could not be calculated on the server side.
- 0x5A - Setting Access Rights failed - The server could not set the access rights.
- 0x5B - Session key creation/derivation failed - The server could not create or derive a session key.
- 0x5C - Configuration data usage failed - The server could not work with the provided configuration data.
- 0x5D - DeAuthentication failed - DeAuthentication was not successful, server could still be unprotected.
- 0x5E-0x6F - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x70 - uploadDownloadNotAccepted - This NRC indicates that an attempt to upload/download to a server's memory cannot be accomplished due to some fault conditions.
- 0x71 - transferDataSuspended - This NRC indicates that a data transfer operation was halted due to some fault. The active transferData sequence shall be aborted.
- 0x72 - generalProgrammingFailure - This NRC indicates that the server detected an error when erasing or programming a memory location in the permanent memory device (e.g. Flash Memory).
- 0x73 - wrongBlockSequenceCounter - This NRC indicates that the server detected an error in the sequence of blockSequenceCounter values. Note that the repetition of a TransferData request message with a block-SequenceCounter equal to the one included in the previous TransferData request message shall be accepted by the server.
- 0x74-0x77 - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.

- 0x78 - requestCorrectlyReceived-ResponsePending - This NRC indicates that the request message was received correctly, and that all parameters in the request message were valid (these checks can be delayed until after sending this NRC if executing the boot software), but the action to be performed is not yet completed and the server is not yet ready to receive another request. As soon as the requested service has been completed, the server shall send a positive response message or negative response message with a response code different from this.
- 0x79-0x7D - ISO Reserved - This range of values is reserved for future definition by ISO 14229 Standard.
- 0x7E - SubFunctionNotSupportedInActiveSession - This NRC indicates that the requested action will not be taken because the server does not support the requested SubFunction in the session currently active. This NRC shall only be used when the requested SubFunction is known to be supported in another session, otherwise response code SubFunctionNotSupported shall be used.
- 0x7F - serviceNotSupportedInActiveSession - This NRC indicates that the requested action will not be taken because the server does not support the requested service in the session currently active. This NRC shall only be used when the requested service is known to be supported in another session, otherwise response code serviceNotSupported shall be used.
- 0x80 - ISO Reserved - This value is reserved for future definition by ISO 14229 Standard.
- 0x81 - rpmTooHigh - This NRC indicates that the requested action will not be taken because the server prerequisite condition for RPM is not met (current RPM is above a preprogrammed maximum threshold).
- 0x82 - rpmTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for RPM is not met (current RPM is below a preprogrammed minimum threshold).
- 0x83 - engineIsRunning - This NRC is required for those actuator tests which cannot be actuated while the Engine is running. This is different from RPM too high negative response, and shall be allowed.
- 0x84 - engine IsNotRunning - This NRC is required for those actuator tests which cannot be actuated unless the Engine is running. This is different from RPM too low negative response, and shall be allowed.
- 0x85 - engineRunTimeTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for engine run time is not met (current engine run time is below a preprogrammed limit).
- 0x86 - temperatureTooHigh - This NRC indicates that the requested action will not be taken because the server prerequisite condition for temperature is not met (current temperature is above a preprogrammed maximum threshold).
- 0x87 - temperatureTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for temperature is not met (current temperature is below a preprogrammed minimum threshold).
- 0x88 - vehicleSpeedTooHigh - This NRC indicates that the requested action will not be taken because the server prerequisite condition for vehicle speed is not met (current VS is above a preprogrammed maximum threshold).
- 0x89 - vehicleSpeedTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for vehicle speed is not met (current VS is below a preprogrammed minimum threshold).
- 0x8A - throttle/PedalTooHigh - This NRC indicates that the requested action will not be taken because the server prerequisite condition for throttle/pedal position is not met (current throttle/pedal position is above a preprogrammed maximum threshold).
- 0x8B - throttle/PedalTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for throttle/pedal position is not met (current throttle/pedal position is below a preprogrammed minimum threshold).

- 0x8C - transmissionRangeNotInNeutral - This NRC indicates that the requested action will not be taken because the server prerequisite condition for being in neutral is not met (current transmission range is not in neutral).
- 0x8D - transmissionRangeNotInGear - This NRC indicates that the requested action will not be taken because the server prerequisite condition for being in gear is not met (current transmission range is not in gear).
- 0x8E - ISO Reserved - This value is reserved for future definition by ISO 14229 Standard.
- 0x8F - brakeSwitch(es)NotClosed (Brake Pedal not pressed or not applied) - This NRC indicates that for safety reasons, this is required for certain tests before it begins, and shall be maintained for the entire duration of the test.
- 0x90 - shifterLeverNotInPark - This NRC indicates that for safety reasons, this is required for certain tests before it begins, and shall be maintained for the entire duration of the test.
- 0x91 - torqueConverterClutchLocked - This NRC indicates that the requested action will not be taken because the server prerequisite condition for torque converter clutch is not met (current torque converter clutch status above a preprogrammed limit or locked).
- 0x92 - voltageTooHigh - This NRC indicates that the requested action will not be taken because the server prerequisite condition for voltage at the primary pin of the server (ECU) is not met (current voltage is above a preprogrammed maximum threshold).
- 0x93 - voltageTooLow - This NRC indicates that the requested action will not be taken because the server prerequisite condition for voltage at the primary pin of the server (ECU) is not met (current voltage is below a preprogrammed minimum threshold).
- 0x94 - ResourceTemporarilyNotAvailable - This NRC indicates that the server has received the request but the requested action could not be performed by the server because an application which is necessary to supply the requested information is temporality not available. This NRC is in general supported by each diagnostic service, as not otherwise stated in the data link specific implementation document, therefore it is not listed in the list of applicable response codes of the diagnostic services.
- 0x95-0xEF - reservedForSpecificConditionsNotCorrect - This range of values is reserved for future definition condition not correct scenarios by ISO 14229 Standard.
- 0xF0-0xFE - vehicleManufacturerSpecificConditionsNotCorrect - This range of values is reserved for vehicle manufacturer specific condition not correct scenarios.
- 0xFF - ISO Reserved - This value is reserved for future definition by ISO 14229 Standard.

## 5.2.5 Addressing

Addressing determines model of UDS communication.

We distinguish following addressing types:

- *Physical*
- *Functional*

## Physical

Physical addressing is used to send a dedicated message to a certain server (ECU). When physically addressed messages are sent, the direct (point-to-point) communication between the client and the server takes place. The server shall respond to a physically addressed request unless the request contains an information that a response is not required (further explained in [response behaviour to physically addressed request](#) chapter).

---

**Note:** You do not need a direct physical connection between a client and a server to have physically addressed communication as all messages shall be routed to a target of each message.

---

### Response behaviour to physically addressed request

Expected server behaviour in case of receiving physically addressed request message with SubFunction parameter:

Client re-quest	Server capability			Server response		Comment	
Ad-dress-ing	SPRM	SID supported	SF supported	Data-Param supported	Mes-sage	NRC	
phys-ical False (bit = 0)	YES	YES		At least 1	Pos-itive Re-sponse	—	Server supports the requests and sends positive response.
				At least 1	Neg-ative Re-sponse	NRC XX	Server sends negative response because an error occurred processing the data parameters of request message.
				None		NRC ROOR	Servers sends negative response with NRC 0x31.
	NO	—	—			NRC SNS or SNSIAS	Servers sends negative response with NRC 0x11 or 0x7F.
	YES	NO	—			NRC SFNS or SFNSIAS	Servers sends negative response with NRC 0x12 or 0x7E.
True (bit = 1)	YES	YES		At least 1	No Re-sponse	—	Server does not send a response.
				At least 1	Neg-ative Re-sponse	NRC XX	Server sends negative response because an error occurred processing the data parameters of request message.
				None		NRC ROOR	Servers sends negative response with NRC 0x31.
	NO	—	—			NRC SNS or SNSIAS	Servers sends negative response with NRC 0x11 or 0x7F.
	YES	NO	—			NRC SFNS or SFNSIAS	Servers sends negative response with NRC 0x12 or 0x7E.

Expected server behaviour in case of receiving physically addressed request message without SubFunction parameter:

Client re-quest	Server capability	Server response	Comment
Ad-dress-ing	SID sup-ported	Data-param supported	Message NRC
physical	YES	All	Positive Re-response — Server supports the requests and sends positive response.
		At least 1	Positive Re-response — Server supports the requests and sends positive response.
		At least 1	Negative Re-response NRC = XX Server sends negative response because an error occurred processing the data parameters of request message.
		None	NRC = ROOR Servers sends negative response with NRC 0x31.
	NO	—	NRC = SNS or 0x7F Servers sends negative response with NRC 0x11 or SNSIAS SNSIAS

**Where:**

- SPRMIB - flag informing whether Suppress Positive Response Message Indication Bit is set in the received request message
- SID supported - flag informing whether Service Identifier in the received request message is supported by the server
- SF supported - flag informing whether SubFunction in the received request message is supported by the server
- DataParam supported - information whether values of data parameters (e.g. DIDs, RIDs, DTCStatusMask) in the received request message are supported by the server
- NRC - Negative Response Code
- ROOR - NRC 0x31 (requestOutOfRange)
- SNS - NRC 0x11 (serviceNotSupported)
- SNSIAS - NRC 0x7F (serviceNotSupportedInActiveSession)
- SFNS - NRC 0x12 (SubFunctionNotSupported)
- SFNSIAS - NRC 0x7E (SubFunctionNotSupportedInActiveSession)
- XX - NRC code that is supported by the server and suitable to the current situation (e.g. NRC 0x21 busyRepeatRequest if server is currently overloaded and cannot process next request message)

## Functional

Functional addressing is used to send messages to multiple servers (ECUs) in the network. When functionally addressed messages are sent, a one to many communication between a client and servers (ECUs) takes place. A server shall only respond to certain functionally addressed requests (further explained in [response behaviour to functionally addressed request](#) chapter).

---

**Note:** Some types of buses (e.g. LIN) might also support broadcast communication which slightly change expected server behaviour. When broadcast communication is used, then a server response is never expected by a client.

---

### Response behaviour to functionally addressed request

Expected server behaviour in case of receiving functionally addressed request message with SubFunction parameter:

Client re-quest	Server capability				Server re-sponse	Comment
	Ad-dress-ing	SPRM	SID sup-ported	SF sup-ported	Data-Param sup-ported	NRC
func-tional False (bit = 0)	YES	YES	At least 1	Positive Re-sponse	—	Server supports the requests and sends positive response.
				Neg-ative Re-sponse	NRC = XX	Server sends negative response because an error occurred processing the data parameters of request message.
				None	No Re-sponse	Server does not send a response.
	NO	—	—	—	—	Server does not send a response.
	YES	NO	—	—	—	Server does not send a response.
	True (bit = 1)	YES	At least 1	No Re-sponse	—	Server does not send a response.
				Neg-ative Re-sponse	NRC = XX	Server sends negative response because an error occurred processing the data parameters of request message.
				None	No Re-sponse	Server does not send a response.
	NO	—	—	—	—	Server does not send a response.
	YES	NO	—	—	—	Server does not send a response.

Expected server behaviour in case of receiving functionally addressed request message without SubFunction parameter:

Client re-quest	Server capability	Server response	Comment	
Ad-dress-ing functional	SID supported	Data-param supported	Message NRC	
YES	All At least 1 At least 1	Positive Response	—	Server supports the requests and sends positive response.
		Negative Response	NRC = XX	Server supports the requests and sends positive response.
		None	—	Server sends negative response because an error occurred processing the data parameters of request message.
	NO	No Response	—	Server does not send a response.

Where:

- SPRMIB - flag informing whether Suppress Positive Response Message Indication Bit is set in the received request message
- SID supported - flag informing whether Service Identifier in the received request message is supported by the server
- SF supported - flag informing whether SubFunction in the received request message is supported by the server
- DataParam supported - information whether values of data parameters (e.g. DIDs, RIDs, DTCStatusMask) in the received request message are supported by the server
- NRC - Negative Response Code
- XX - NRC code that is supported by the server and suitable to the current situation (e.g. NRC 0x21 busyRepeatRequest if server is currently overloaded and cannot process next request message)

## 5.3 UDS Packet

UDS packet might also be called Network Protocol Data Unit (N\_PDU). The packets are created during *segmentation* of a *diagnostic message*. Each *diagnostic message* consists of at least one UDS Packet (N\_PDU). There are some packets which does not carry any diagnostic message data as they are used to manage the flow of other packets.

**UDS packet consists of following fields:**

- Network Address Information* (N\_AI) - packet addressing
- Network Data Field* (N\_Data) - packet data
- Network Protocol Control Information* (N\_PCI) - packet type

### 5.3.1 Network Address Information

Network Address Information (N\_AI) contains address information which identifies the recipient(s) and the sender between whom data exchange takes place. It also describes communication model (e.g. whether response is required) for the message.

### 5.3.2 Network Data Field

Network Data Field (N\_Data) carries diagnostic message data. It might be an entire diagnostic message data (if a *diagnostic message* fits into one packet) or just a part of it (if *segmentation* had to be used to divide a *diagnostic message* into smaller parts).

### 5.3.3 Network Protocol Control Information

Network Protocol Control Information (N\_PCI) identifies the type of *UDS packet* (Network Protocol Data Unit). N\_PCI values and their interpretation are bus specific.

### 5.3.4 UDS Packet on CAN

In this chapter you will find information about UDS packets that are specific for CAN bus, therefore **applicable only for UDS packets that are transmitted over CAN bus**.

#### CAN Frame

CAN data frames are the only type of CAN frames that are used during normal UDS communication. CAN data frames are made up of many different fields, but the key in our case (these influenced by UDS protocol) are listed below:

- CAN Identifier (CAN ID)

CAN ID is a field that informs every receiving CAN node about a sender and a content of frames. CAN nodes shall filter out and ignore CAN frames that are not relevant for them. In a normal situation, a CAN node detects a transmission of incoming CAN frames and once the identifier value (of a CAN frame) is decoded, the CAN node shall stop further listening to the frame if the CAN node is not a recipient of the frame.

There are two formats of CAN ID:

- Standard (11-bit Identifier)
- Extended (29-bit identifier)

- Data Length Code (DLC)

Data Length Code (DLC) informs about number of CAN frame payload bytes that CAN Data Field contains.

- CAN Data Field

CAN Data consists of CAN frame payload bytes. The number of bytes that CAN Data Field contains is determined by frame's DLC values as presented in the table:

DLC	Number of CAN Data bytes	Supported by CLASSICAL CAN	Supported by CAN FD
0x0	0	YES	YES
0x1	1	YES	YES
0x2	2	YES	YES
0x3	3	YES	YES
0x4	4	YES	YES
0x5	5	YES	YES
0x6	6	YES	YES
0x7	7	YES	YES
0x8	8	YES	YES
0x9	12	NO	YES
0xA	16	NO	YES
0xB	20	NO	YES
0xC	24	NO	YES
0xD	32	NO	YES
0xE	48	NO	YES
0xF	64	NO	YES

---

**Note:** To learn more about CAN bus and CAN frame structure, you are encouraged to visit [e-learning portal of Vector Informatik GmbH](#).

---

## CAN Packet Addressing Formats

Each CAN packet addressing format describes a different way of providing *Network Address Information* to all recipients of CAN packets.

**The exchange of UDS Packets on CAN is supported by three addressing formats:**

- *Normal addressing*
- *Extended addressing*
- *Mixed addressing*

**Warning:** Addressing format must be predefined and configured before any CAN packet is received as every CAN packet addressing format determines a different way of decoding CAN packets information (*Network Address Information*, *Network Data Field* and *Network Protocol Control Information*) that is not compatible with other addressing formats.

---

**Note:** Regardless of addressing format used, to transmit a *functionally addressed* message over CAN, a sender is allowed to use *Single Frame* packets only.

---

## Normal Addressing

If normal addressing format is used, then the value of CAN Identifier carries an entire *Network Address Information*. Basing on CAN Identifier value, it is possible to distinguish *an addressing type*, a sender and a target/targets entities of a packet.

**Following parameters specifies *Network Address Information* when Normal Addressing is used:**

- CAN ID

---

**Note:** Correspondence between *Network Address Information* and the value of CAN Identifier is left open for a network designer unless *normal fixed addressing* subformat is used.

---

**Note:** *Network Protocol Control Information* is placed in the **first byte** of *CAN frame data field* if normal addressing format is used.

---

## Normal Fixed Addressing

Normal fixed addressing format is a special case of *normal addressing* in which the mapping of the address information into the CAN identifier is further defined.

---

**Note:** For normal fixed addressing, only 29-bit (extended) CAN Identifiers are allowed.

---

**Following parameters specifies *Network Address Information* when Normal Fixed Addressing is used:**

- CAN ID (with embedded **Target Address** and **Source Address**)

**CAN Identifier values used for UDS communication using normal fixed addressing:**

- For *physical addressed* messages, CAN Identifier value is defined as presented below:

CAN\_ID = **0x18DATSS**

- For *functional addressed* messages, CAN Identifier value is defined as presented below:

CAN\_ID = **0x18DBTTSS**

**where:**

- CAN\_ID - value of **CAN Identifier**
- TT - two (hexadecimal) digits of a 8-bit **Target Address** value
- SS - two (hexadecimal) digits of a 8-bit **Source Address** value

## Extended Addressing

If extended addressing format is used, then the value of **the first CAN frame byte informs about a target** of a UDS packet and remaining *Network Address Information* (a sending entity and *an addressing type*) are determined by CAN Identifier value.

Following parameters specifies *Network Address Information* when Extended Addressing is used:

- CAN ID
- Target Address (located in the first data byte of a *CAN Frame*)

---

**Note:** *Network Protocol Control Information* is placed in the **second byte** of *CAN frame data field* if extended addressing format is used.

---

## Mixed Addressing

Mixed addressing format specifies that **the first byte of a CAN frame is an extension** of *Network Address Information*.

---

**Note:** *Network Protocol Control Information* is placed in the **second byte** of *CAN frame data field* if mixed addressing format is used.

---

### Mixed Addressing - 11-bit CAN Identifier

If mixed addressing format is used with 11-bit CAN Identifiers, then the value of **the first CAN frame byte extends** the CAN Identifier and a combination of these data forms the entire *Network Address Information* of a CAN packet.

Following parameters specifies *Network Address Information* when Extended Addressing is used:

- CAN ID
- Addressing Extension (located in the first data byte of a *CAN Frame*)

### Mixed Addressing - 29-bit CAN Identifier

If mixed addressing format is used with 29-bit CAN Identifiers, then the value of **the first CAN frame byte extends** the CAN Identifier (that contains **Target Address** and **Sender Address** values) and a combination of these data forms the entire *Network Address Information* of a CAN packet.

Following parameters specifies *Network Address Information* when Extended Addressing is used:

- CAN ID (with embedded **Target Address** and **Source Address**)
- Addressing Extension (located in the first data byte of a *CAN Frame*)

**CAN Identifier values used for UDS communication using mixed 29-bit addressing:**

- For *physical addressed* messages, CAN Identifier value is defined as presented below:

```
CAN_ID = 0x18CETTSS
```

- For *functional addressed* messages, CAN Identifier value is defined as presented below:

CAN_ID = 0x18CDTTSS
---------------------

where:

- CAN\_ID - value of **CAN Identifier**
- TT - two (hexadecimal) digits of a 8-bit **Target Address** value
- SS - two (hexadecimal) digits of a 8-bit **Source Address** value

### CAN Data Field

*CAN frames* that are exchanged during UDS communication must have Data Length Code (DLC) equal to 8 (for CLASSICAL CAN and CAN FD) or greater (for CAN FD). The only exception is usage of *CAN Frame Data Optimization*.

DLC	Description
<8	<i>Valid only for CAN frames using data optimization</i> Values in this range are only valid for Single Frame, Flow Control and Consecutive Frame that use CAN frame data optimization.
8	<i>Configured CAN frame maximum payload length of 8 bytes</i> For the use with CLASSICAL CAN and CAN FD type frames.
>8	<i>Configured CAN frame maximum payload length greater than 8 bytes</i> For the use with CAN FD type frames only.

where:

- DLC - Data Length Code of a *CAN frame*

---

**Note:** Number of bytes that carry diagnostic message payload depends on a type and a format of a CAN packet as it is presented in *the table with CAN packets formats*.

---

### CAN Frame Data Padding

If a number of bytes specified in a UDS Packet is shorter than a number of bytes in CAN frame's data field, then the sender has to pad any unused bytes in the frame. This can only be a case for *Single Frame*, *Flow Control* and the last *Consecutive Frame* of a segmented message. If not specified differently, the default value 0xCC shall be used for the frame padding to minimize the bit stuffing insertions and bit alteration on the wire.

---

**Note:** CAN frame data padding is mandatory for *CAN frames* with DLC>8 and optional for frames with DLC=8.

---

## CAN Frame Data Optimization

CAN frame data optimization is an alternative to [CAN Frame Data Padding](#). If a number of bytes specified in a CAN Packet is shorter than a number of bytes in CAN frame's data field, then the sender might decrease DLC value of the [CAN frame](#) to the minimal number that is required to send a desired number of data bytes in a single CAN packet.

---

**Note:** CAN Frame Data Optimization might always be used for CAN Packets with less than 8 bytes of data to send.

---

**Warning:** CAN Frame Data Optimization might not always be able to replace [CAN Frame Data Padding](#) when CAN FD is used. This is a consequence of DLC values from 9 to 15 meaning as these values are mapped into CAN frame data bytes numbers in a non-linear way (e.g. DLC=9 represents 12 data bytes).

Example:

*When a CAN Packet with 47 bytes of data is planned for a transmission, then DLC=14 can be used instead of DLC=15, to choose 48-byte instead of 64-byte long CAN frame. Unfortunately, the last byte of CAN Frame data has to be padded as there is no way to send over CAN a frame with exactly 47 bytes of data.*

## CAN Packet Types

According to ISO 15765-2, CAN bus supports 4 types of UDS packets.

**List of all values of [Network Protocol Control Information](#) supported by CAN bus:**

- 0x0 - *Single Frame*
- 0x1 - *First Frame*
- 0x2 - *Consecutive Frame*
- 0x3 - *Flow Control*
- 0x4-0xF - values range reserved for future extension by ISO 15765

The format of all CAN packets is presented in the table below.

CAN N_PDU	Byte #1		Byte #2	Byte #3	Byte #4	Byte #5	Byte #6	...
	Bits 7-4	Bits 3-0						
Single Frame <i>DLC 8</i>	0x0	SF_DL						
Single Frame <i>DLC &gt; 8</i>	0x0	0x0	SF_DL					
First Frame <i>FF_DL 4095</i>	0x1	FF_DL						
First Frame <i>FF_DL &gt; 4095</i>	0x1	0x0	0x00	FF_DL				
Consecutive Frame	0x2	SN						
Flow Control	0x3	FS	BS	ST_min	N/A	N/A	N/A	N/A

**where:**

- DLC - Data Length Code of a CAN frame, it is equal to number of data bytes carried by this CAN frame
- SF\_DL - *Single Frame Data Length*

- FF\_DL - *First Frame Data Length*
- SN - *Sequence Number*
- FS - *Flow Status*
- BS - *Block Size*
- ST\_min - *Separation Time minimum*
- N/A - Not Applicable (byte does not carry any information)

## Single Frame

Single Frame (SF) is used by CAN entities to transmit a diagnostic message with a payload short enough to fit it into a single CAN packet. In other words, Single Frame carries payload of an entire diagnostic message. Number of payload bytes carried by SF is specified by *Single Frame Data Length* value.

### Single Frame Data Length

Single Frame Data Length (SF\_DL) is 4-bit (for CAN packets with DLC<=8) or 8-bit (for CAN packets with DLC>8) value carried by every Single Frame as presented in *the table with CAN packet formats*. SF\_DL specifies number of diagnostic message payload bytes transmitted in a Single Frame.

---

**Note:** Maximal value of SF\_DL depends on Single Frame *addressing format* and *DLC of a CAN message* that carries this packet.

---

## First Frame

First Frame (FF) is used by CAN entities to indicate start of a diagnostic message transmission. First Frames are only used during a transmission of a segmented diagnostic messages that could not fit into a *Single Frame*. Number of payload bytes carried by FF is specified by *First Frame Data Length* value.

### First Frame Data Length

First Frame Data Length (FF\_DL) is 12-bit (if FF\_DL < 4095) or 4-byte (if FF\_DL > 4095) value carried by every First Frame. FF\_DL specifies number of diagnostic message payload bytes of a diagnostic message which transmission was initiated by a First Frame.

---

**Note:** Maximal value of FF\_DL is 4294967295 (0xFFFFFFFF). It means that CAN bus is capable of transmitting diagnostic messages that contains up to nearly 4,3 GB of payload bytes.

---

## Consecutive Frame

Consecutive Frame (CF) is used by CAN entities to continue transmission of a diagnostic message. *First Frame* shall always precede (one or more) Consecutive Frames. Consecutive Frames carry payload bytes of a diagnostic message that was not transmitted in a *First Frame* that preceded them. To avoid ambiguity and to make sure that no Consecutive Frame is lost, the order of Consecutive Frames is determined by *Sequence Number* value.

## Sequence Number

Sequence Number (SN) is 4-bit value used to specify the order of Consecutive Frames.

The rules of proper Sequence Number value assignment are following:

- SN value of the first *Consecutive Frame* that directly follows a *First Frame* shall be set to 1
- SN shall be incremented by 1 for each following *Consecutive Frame*
- SN value shall not be affected by *Flow Control* frames
- when SN reaches the value of 15, it shall wraparound and be set to 0 in the next *Consecutive Frame*

## Flow Control

Flow Control (FC) is used by receiving CAN entities to instruct sending entities to stop, start, pause or resume transmission of *Consecutive Frames*.

Flow Control packet contains following parameters:

- *Flow Status*
- *Block Size*
- *Separation Time Minimum*

## Flow Status

Flow Status (FS) is 4-bit value that is used to inform a sending network entity whether it can proceed with a Consecutive Frames transmission.

Values of Flow Status:

- 0x0 - ContinueToSend (CTS)

ContinueToSend value of Flow Status informs a sender of a diagnostic message that receiving entity (that responded with CTS) is ready to receive a maximum of *Block Size* number of *Consecutive Frames*.

Reception of a *Flow Control* frame with ContinueToSend value shall cause the sender to resume ConsecutiveFrames sending.

- 0x1 - wait (WAIT)

Wait value of Flow Status informs a sender of a diagnostic message that receiving entity (that responded with WAIT) is not ready to receive another *Consecutive Frames*.

Reception of a *Flow Control* frame with WAIT value shall cause the sender to pause ConsecutiveFrames sending and wait for another *Flow Control* frame.

Values of *Block Size* and *STmin* in the *Flow Control* frame (that contains WAIT value of Flow Status) are not relevant and shall be ignored.

- 0x2 - Overflow (OVFLW)

Overflow value of Flow Status informs a sender of a diagnostic message that receiving entity (that responded with OVFLW) is not able to receive a full diagnostic message as it is too big and reception of the message would result in *Buffer Overflow* on receiving side. In other words, the value of *FF\_DL* exceeds the buffer size of the receiving entity.

Reception of a *Flow Control* frame with Overflow value shall cause the sender to abort the transmission of a diagnostic message.

Overflow value shall only be sent in a *Flow Control* frame that directly follows a *First Frame*.

Values of *Block Size* and *STmin* in the *Flow Control* frame (that contains OVFLW value of Flow Status) are not relevant and shall be ignored.

- 0x3-0xF - Reserved

This range of values is reserved for future extension by ISO 15765.

## Block Size

Block Size (BS) is a one byte value specified by receiving entity that informs about number of *Consecutive Frames* to be sent in a one block of packets.

### Block Size values:

- 0x00

The value 0 of the Block Size parameter informs a sender that no more *Flow Control* frames shall be sent during the transmission of the segmented message.

Reception of Block Size = 0 shall cause the sender to send all remaining *Consecutive Frames* without any stop for further *Flow Control* frames from the receiving entity.

- 0x01-0xFF

This range of Block Size values informs a sender the maximum number of *Consecutive Frames* that can be transmitted without an intermediate *Flow Control* frames from the receiving entity.

## Separation Time Minimum

Separation Time minimum (STmin) is a one byte value specified by receiving entity that informs about minimum time gap between the transmission of two following *Consecutive Frames*.

### STmin values:

- 0x00-0x7F - Separation Time minimum range 0-127 ms

The value of STmin in this range represents the value in milliseconds (ms).

0x00 = 0 ms

0xFF = 127 ms

- 0x80-0xF0 - Reserved

This range of values is reserved for future extension by ISO 15765.

- 0xF1-0xF9 - Separation Time minimum range 100-900 s

The value of STmin in this range represents the value in microseconds (s) according to the formula:

$$(ST_{min} - 0xF0) * 100 \text{ s}$$

Meaning of example values:

0xF1 -> 100 s

0xF5 -> 500 s

0xF9 -> 900 s

- 0xFA-0xFF - Reserved

This range of values is reserved for future extension by ISO 15765.

## 5.4 Segmentation

### 5.4.1 Message Segmentation

To transmit a diagnostic message, its information (payload and addressing) must be unambiguously encoded into one or more segments (these segments are called *UDS Packets* by this documentation) that are specific for bus used.

---

**Note:** Segmentation process is specific for each bus due to various topologies supported by each bus, various communication models (e.g. Master/Slave) enforced by them, etc.

---

#### Segmentation on CAN

##### Unsegmented message transmission

When mentioning unsegmented message transmission, we mean a case when an entire *Diagnostic Message* can be fully transmitted by a single packet. *Single Frame (CAN Packet)* is the only type of CAN Packets that can be used in the described scenario.

##### Segmented message transmission

When a *Diagnostic Message* to be transmitted on CAN contains payload which size is greater than a *Single Frame* capacity, then the message payload must be divided and transmitted by many CAN packets. The first packet to carry such messages is *First Frame (CAN Packet)* and its transmission is followed by *Consecutive Frames (CAN Packets)*. A receiver controls the stream of incoming *Consecutive Frames* by sending *Flow Control (CAN Packet)* after *First Frame* and each complete transmission of *Consecutive Frames* block.

---

**Note:** The size of *Consecutive Frames* block is determined by *Block Size* parameter which value is carried by *Flow Control*.

---

---

**Note:** The minimum time between two *Consecutive Frames* is determined by *Separation Time Minimum* parameter which value is carried by *Flow Control*.

---

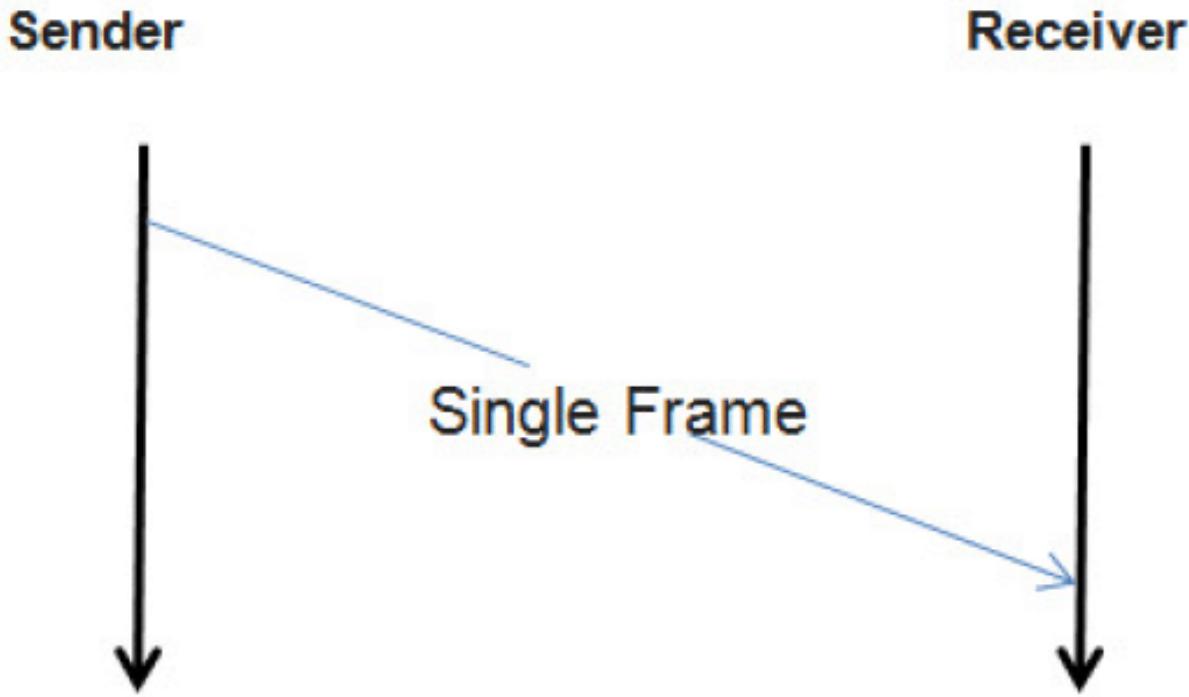


Fig. 4: Transmission of an unsegmented Diagnostic Message on CAN bus.  
A sender transmits a *Single Frame (CAN Packet)* that contains an entire *Diagnostic Message*.

#### See also:

Only the typical use case of *Flow Control* was described here. Check *Flow Status* parameter and meaning of its values to study less likely scenarios.

#### 5.4.2 Packets Desegmentation

Desegmentation is an unambiguous operation which is the reverse process to a *message segmentation*. It transforms one or more *UDS packets* into a *diagnostic message*.

---

**Note:** There are many ways to segment a diagnostic message into CAN packets, but there is always only one correct way to perform desegmentation and decode a diagnostic message out of CAN Packets.

---

### 5.5 Performance and Error Handling

In this chapter of the documentation, we would explain performance and timing requirements for UDS communication and how they are supposed to be handled by UDS entities.

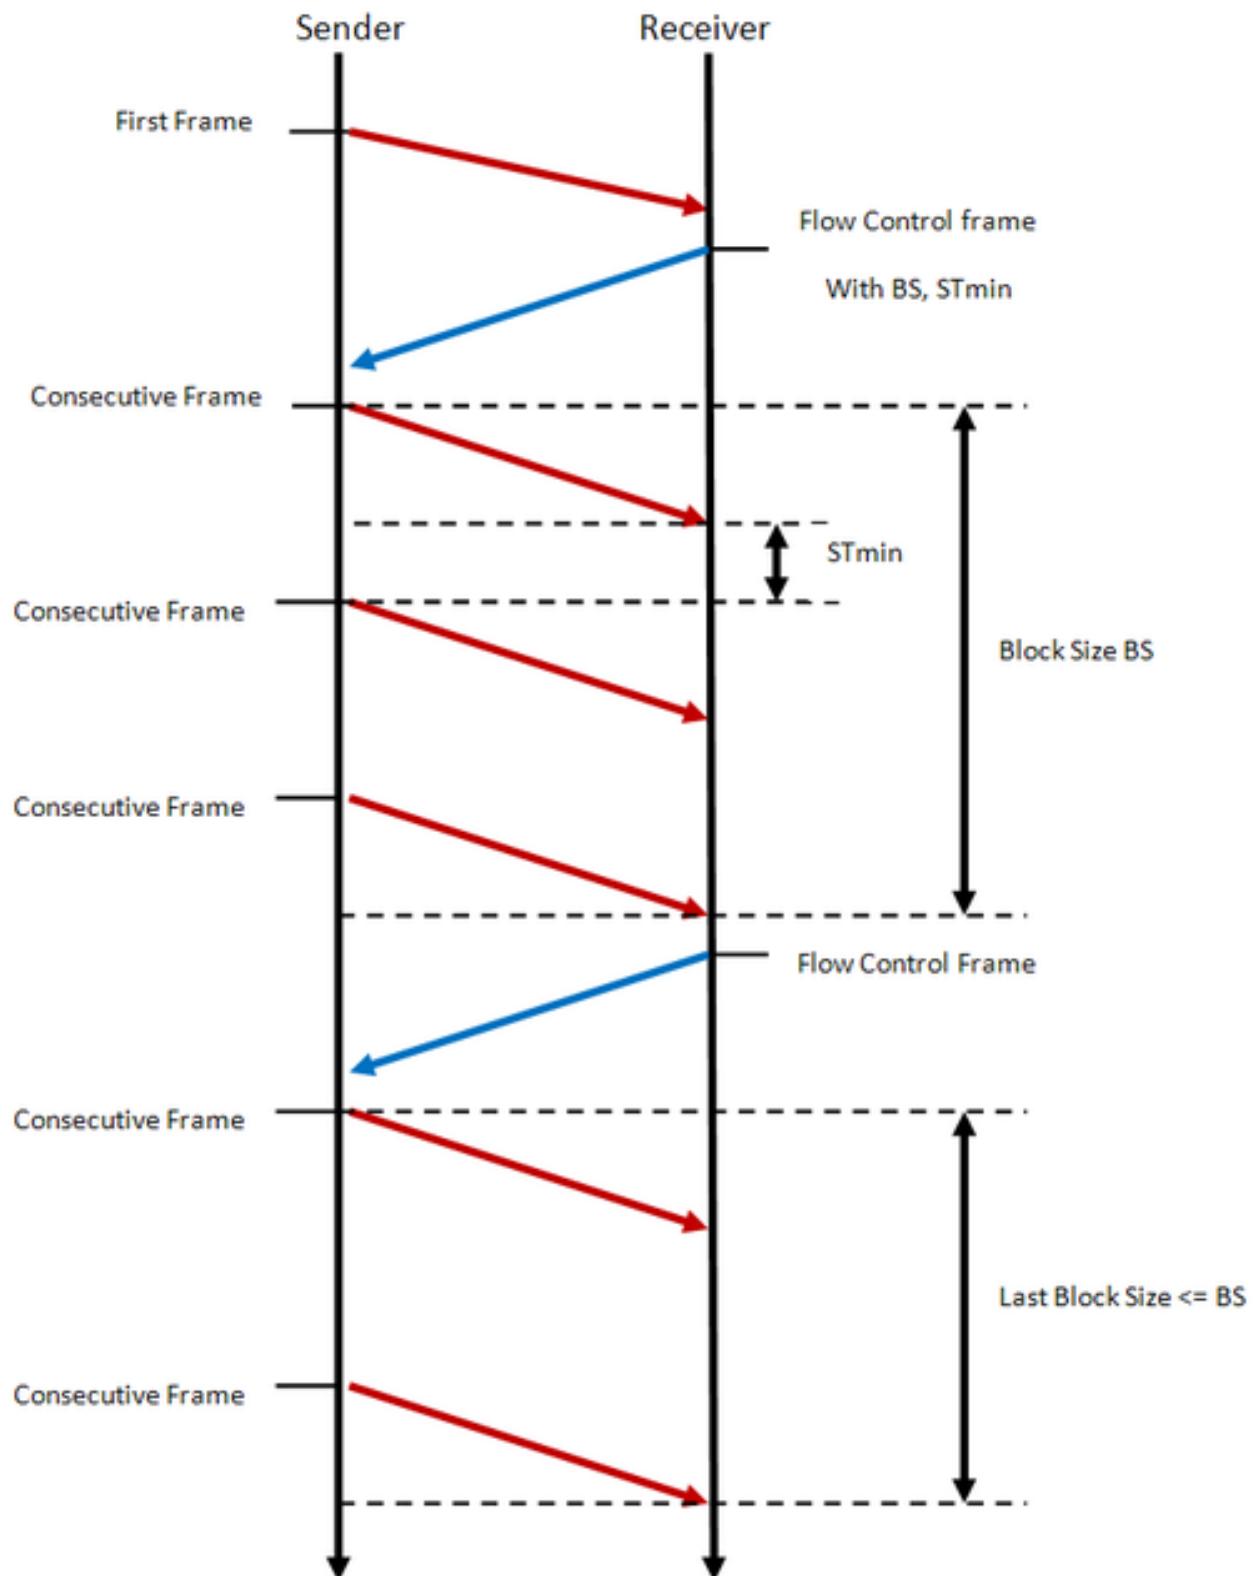


Fig. 5: Transmission of a segmented Diagnostic Message on CAN bus.

A sender initiates *Diagnostic Message* transmission with a *First Frame (CAN Packet)*. Then, a receiver controls the stream of incoming *Consecutive Frames (CAN Packets)* by transmitting *Flow Controls (CAN Packets)*.

### 5.5.1 CAN specific

*ISO standards* defines following time values on the network layer of UDS on CAN communication:

- $N_{As}$
- $N_{Ar}$
- $N_{Bs}$
- $N_{Br}$
- $N_{Cs}$
- $N_{Cr}$

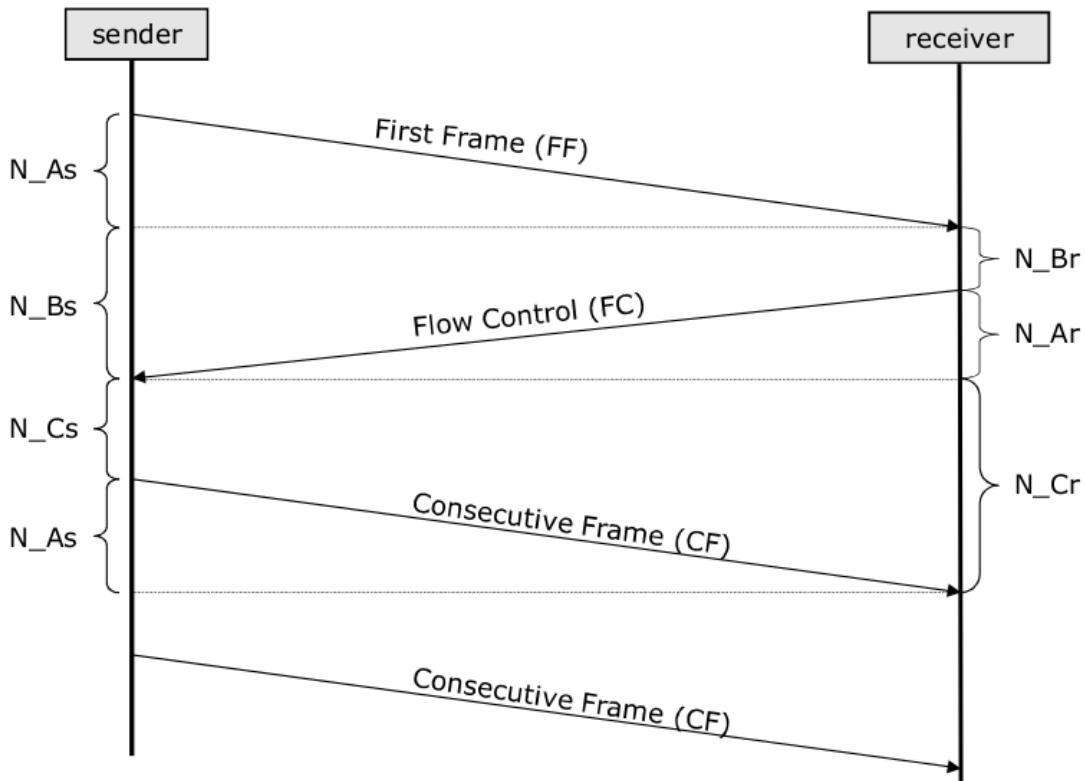


Fig. 6: Network layer time values ( $N_{As}$ ,  $N_{Ar}$ ,  $N_{Bs}$ ,  $N_{Br}$ ,  $N_{Cs}$ ,  $N_{Cr}$ ) present during UDS on CAN communication.

---

**Note:** The example uses *segmented diagnostic message transmission* as all CAN timings values can be presented there (all these times are applicable in this case). For *unsegmented diagnostic message transmission* though, the only applicable time parameter is  $N_{As}$ .

## N\_As

N\_As is a time parameter related to transmission of any *CAN Packet* by a sender. It is measured from the beginning of the *CAN Frame* (that carries such CAN Packet) transmission till the reception of a confirmation that this CAN Frame was received by a receiver.

### Timeout value:

1000 ms

### Error handling:

If N\_As timeout is exceeded, then the transmission of the *diagnostic message* shall be aborted.

### Affected *CAN Packets*:

- *Single Frame*
- *First Frame*
- *Consecutive Frame*

## N\_Ar

N\_Ar is a time parameter related to transmission of any *CAN Packet* by a receiver. It is measured from the beginning of the *CAN Frame* (that carries such CAN Packet) transmission till the reception of a confirmation that this CAN Frame was received by a sender.

### Timeout value:

1000 ms

### Error handling:

If N\_Ar timeout is exceeded, then the reception of the *diagnostic message* shall be aborted.

### Affected *CAN Packets*:

- *Flow Control*

## N\_Bs

N\_Bs is a time parameter related to *Flow Control (CAN Packet)* reception by a sender. It is measured from the end of the last CAN Packet transmission (either transmitted *First Frame*, *Consecutive Frame* or received *Flow Control*), till the reception of *Flow Control*.

### Timeout value:

1000 ms

### Error handling:

If N\_Bs timeout is exceeded, then the reception of the *diagnostic message* shall be aborted.

### Affected *CAN Packets*:

- *Flow Control*

## N\_Br

N\_Br is a time parameter related to *Flow Control (CAN Packet)* transmission by a receiver. It is measured from the end of the last CAN Packet transmission (either received *First Frame*, *Consecutive Frame* or transmitted *Flow Control*), till the start of *Flow Control* transmission.

### Performance requirement:

A receiving entity is obliged to transmit *Flow Control* packet before value of N\_Br achieves maximal value threshold.

$$\begin{aligned} [N_{Br}] + [N_{Ar}] &< 0.9 * [N_{Bs \ timeout}] \\ [N_{Br \ max}] &= 900\text{ms} - [N_{Ar}] \end{aligned}$$

### Affected CAN Packets:

- *Flow Control*

## N\_Cs

N\_Cs is a time parameter related to *Consecutive Frame (CAN Packet)* transmission by a sender. It is measured from the end of the last CAN Packet transmission (either received *Flow Control* or transmitted *Consecutive Frame*), till the start of *Consecutive Frame* transmission.

### Performance requirement:

A sending entity is obliged to transmit *Consecutive Frame* packet before value of N\_Cs achieves maximal value threshold.

$$\begin{aligned} [N_{Cs}] + [N_{As}] &< 0.9 * [N_{Cr \ timeout}] \\ [N_{Cs \ max}] &= 900\text{ms} - [N_{As}] \end{aligned}$$

### Affected CAN Packets:

- *Consecutive Frame*

## N\_Cr

N\_Cr is a time parameter related to *Consecutive Frame (CAN Packet)* reception by a receiver. It is measured from the end of the last CAN Packet transmission (either transmitted *Flow Control* or received *Consecutive Frame*), till the reception of *Consecutive Frame*.

### Timeout value:

1000 ms

### Error handling:

If N\_Cr timeout is exceeded, then the reception of the *diagnostic message* shall be aborted.

### Affected CAN Packets:

- *Consecutive Frame*



## CONTRIBUTION

### 6.1 How to contribute?

If you want to become a contributor, please visit [UDS project page](#) and read [CONTRIBUTING.md](#) file.

[Contact us](#) to find out what we have got to offer and to get more information.

### 6.2 Sponsoring

If you consider sponsoring our development team, please visit our [wiki page](#) with detailed information for sponsors. With a little help from you, we would be able to improve the quality of our code, speed up the development and provide more features. We also offer special treatment for all our sponsors. Please [contact us](#) for more details.

### 6.3 Reporting issues

To report issues, please use our [issues tracking system](#).

### 6.4 Our Sponsors

Full list of our sponsors:



- Merit Automotive

- sponsoring since September 2021



---

**CHAPTER  
SEVEN**

---

## **OVERVIEW**

The purpose of this project is to provide python tools for simulation (on both sides - client and server) and monitoring of diagnostic communication defined by ISO-14229. It can be used with any bus type (e.g. CAN, Ethernet, LIN).

**The most likely use cases of this package are:**

- communication with your vehicle (e.g. reading Diagnostic Trouble Codes)
- monitoring and decoding ongoing UDS communication
- performing tests against on-board ECU (server)
- performing tests against OBD Tester (client)



## IMPLEMENTATION STATUS

The package is currently in the early development phase, therefore only a few features are currently available. If you want to speed up the development, please visit [contribution section](#) to find out what are your options.

### 8.1 Features

Current implementation status of package features:

Feature	Implementation Status
UDS Messages and Packets	Available since version 0.0.2
UDS Packets Reception and Transmission	Available since version 0.3.0
UDS Messages Reception and Transmission	Planned
Messages Segmentation	Available since version 0.2.0
UDS Packets Desegmentation	Available since version 0.2.0
Support for Services with multiple responses	Planned
Client Simulation	Planned
Server Simulation	Planned
Support for Messages Databases	Planned

### 8.2 Buses supported

Current implementation status of support for communication buses:

Bus	Implementation Status
CAN	Partial
FlexRay	Planned
Ethernet	Planned
K-Line	Planned
LIN	Planned



---

**CHAPTER**

**NINE**

---

**LICENSE**

The project is licensed under the MIT license - <https://github.com/mdabrowski1990/uds/blob/main/LICENSE>



**CONTACT**

- e-mail: [uds-package-development@googlegroups.com](mailto:uds-package-development@googlegroups.com)
- group: UDS package development
- discord: <https://discord.gg/y3waVmR5PZ>

---

**Documentation generated**

Nov 03, 2023

---



## PYTHON MODULE INDEX

### U

uds, 21  
uds.can, 21  
uds.can.abstract\_addressing\_information, 22  
uds.can.addressing\_format, 25  
uds.can.addressing\_information, 26  
uds.can.consecutive\_frame, 30  
uds.can.extended\_addressing\_information, 35  
uds.can.first\_frame, 37  
uds.can.flow\_control, 42  
uds.can.frame\_fields, 50  
uds.can.mixed\_addressing\_information, 59  
uds.can.normal\_addressing\_information, 61  
uds.can.single\_frame, 64  
uds.message, 70  
uds.message.nrc, 70  
uds.message.service\_identifiers, 76  
uds.message.uds\_message, 79  
uds.packet, 83  
uds.packet.abstract\_can\_packet\_container, 83  
uds.packet.abstract\_packet, 86  
uds.packet.abstract\_packet\_type, 90  
uds.packet.can\_packet, 91  
uds.packet.can\_packet\_record, 99  
uds.packet.can\_packet\_type, 101  
uds.segmentation, 102  
uds.segmentation.abstract\_segmenter, 102  
uds.segmentation.can\_segmenter, 105  
uds.transmission\_attributes, 109  
uds.transmission\_attributes.addressing, 109  
uds.transmission\_attributes.transmission\_direction,  
    110  
uds.transport\_interface, 110  
uds.transport\_interface.abstract\_transport\_interface,  
    111  
uds.transport\_interface.can\_transport\_interface,  
    113  
uds.utilities, 121  
uds.utilities.bytes\_operations, 121  
uds.utilities.common\_types, 123  
uds.utilities.custom\_exceptions, 124  
uds.utilities.custom\_warnings, 126



# INDEX

## Symbols

<code>_MAX_LISTENER_TIMEOUT</code>		<i>(uds.transport_interface.can_transport_interface.PyCanTransportInterface attribute), 118</i>	<i>(uds.can.consecutive_frame.CanConsecutiveFrameHandler class method), 70</i>
<code>_MIN_NOTIFIER_TIMEOUT</code>		<i>(uds.transport_interface.can_transport_interface.PyCanTransportInterface attribute), 118</i>	<i>(uds.can.first_frame.CanFirstFrameHandler class method), 35</i>
<code>__DATA_BYTES_NUMBERS</code>		<i>(uds.can.frame_fields.CanDlcHandler attribute), 57</i>	<i>(uds.can.valid_ff_dl() (uds.can.first_frame.CanFirstFrameHandler class method), 41</i>
<code>__DATA_BYTES_NUMBER_MAPPING</code>		<i>(uds.can.frame_fields.CanDlcHandler attribute), 57</i>	<i>(uds.can.flow_control.CanFlowControlHandler class method), 49</i>
<code>__DLC_MAPPING</code>		<i>(uds.can.frame_fields.CanDlcHandler attribute), 57</i>	<i>(uds.can.single_frame.CanSingleFrameHandler class method), 69</i>
<code>__DLC_SPECIFIC_FOR_CAN_FD</code>		<i>(uds.can.frame_fields.CanDlcHandler attribute), 57</i>	<i>(uds.message.uds_message.AbstractUdsMessageContainer eq() (uds.message.uds_message.UdsMessage method), 80</i>
<code>__DLC_VALUES</code>		<i>(uds.can.frame_fields.CanDlcHandler attribute), 57</i>	<i>(uds.message.uds_message.UdsMessageRecord method), 82</i>
<code>__FLOATING_POINT_ACCURACY</code>		<i>(uds.can.flow_control.CanSTminTranslator attribute), 44</i>	<i>(uds.can.first_frame.CanFirstFrameHandler class method), 41</i>
<code>__assess_ai_attributes()</code>		<i>(uds.packet.can_packet_record.CanPacketRecord method), 101</i>	<i>(uds.can.segmentation.CanSegmenter functional_segmentation() (uds.segmentation.can_segmenter.CanSegmenter method), 108</i>
<code>__assess_packet_type()</code>		<i>(uds.packet.can_packet_record.CanPacketRecord method), 101</i>	<i>(uds.license (in module uds), 129</i>
<code>__author__</code>	<i>(in module uds)</i>		<i>(uds.maintainer (in module uds), 129</i>
<code>__credits__</code>	<i>(in module uds)</i>		<i>(uds.physical_segmentation() (uds.segmentation.can_segmenter.CanSegmenter method), 108</i>
<code>__del__()</code>	<i>(uds.transport_interface.can_transport_interface.PyCanTransportInterface method), 118</i>		<i>(uds.segmentation.can_segmenter.CanSegmenter update_ai_data_byte() (uds.packet.can_packet.CanPacket method), 98</i>
<code>__email__</code>	<i>(in module uds)</i>		<i>(uds.validate_packets_records() (uds.message.uds_message.UdsMessageRecord static method), 82</i>
<code>__encode_any_ff_dl()</code>		<i>(uds.can.first_frame.CanFirstFrameHandler class method), 42</i>	<i>(uds.validate_payload_length() (uds.can.single_frame.CanSingleFrameHandler class method), 69</i>
<code>__encode_any_flow_status()</code>		<i>(uds.can.flow_control.CanFlowControlHandler class method), 50</i>	<i>(uds.validate_unambiguous_ai_change() (uds.packet.can_packet.CanPacket method), 98</i>
<code>__encode_any_sf_dl()</code>		<i>(uds.can.single_frame.CanSingleFrameHandler</i>	

`_version_` (in module `uds`), 129  
`_is_100us_value()` (`uds.can.flow_control.CanSTminTranslator` class method), 45  
`_is_ms_value()` (`uds.can.flow_control.CanSTminTranslator` class method), 45  
`_setup_async_notifier()` (`uds.transport_interface.can_transport_interface`.~~PyCanTransportInterface~~ class method), 119  
`_setup_notifier()` (`uds.transport_interface.can_transport_interface`.~~PyCanTransportInterface~~ class method), 119  
`_teardown_async_notifier()` (`uds.transport_interface.can_transport_interface`.~~PyCanTransportInterface~~ class method), 119  
`_teardown_notifier()` (`uds.transport_interface.can_transport_interface`.~~PyCanTransportInterface~~ class method), 118  
`_validate_frame()` (`uds.packet.abstract_packet`.~~AbstractUdsPacket~~ static method), 89  
`_validate_frame()` (`uds.packet.can_packet_record`.~~CanPacketRecord~~ static method), 100

`address_extension` (`uds.can.addressing_information.CanAddressingInformation` attribute), 27  
`address_extension` (`uds.can.addressing_information.CanAddressingInformation` attribute), 28  
`address_extension` (`uds.packet.abstract_can_packet_container`.~~AbstractCanPacketContainer~~ property), 84  
`address_extension` (`uds.packet.can_packet`.~~CanPacket~~ property), 93  
`address_extension` (`uds.packet.can_packet_record`.~~CanPacketRecord~~ property), 100  
`ADDRESS_EXTENSION_NAME`  
`addressing_format` (`uds.can.abstract_addressing_information`.~~AbstractCanAddressingInformation~~ attribute), 24  
`addressing_format` (`uds.can.abstract_addressing_information`.~~AbstractCanAddressingInformation~~ attribute), 24  
`addressing_format` (`uds.can.abstract_addressing_information`.~~AbstractCanAddressingInformation~~ attribute), 24  
`addressing_format` (`uds.can.extended_addressing_information`.~~ExtendedAddressingInformation~~ property), 36  
`addressing_format` (`uds.can.mixed_addressing_information`.~~Mixed11Bit~~ property), 59  
`addressing_format` (`uds.can.mixed_addressing_information`.~~Mixed29Bit~~ property), 60  
`addressing_format` (`uds.can.normal_addressing_information`.~~Normal11Bit~~ property), 62  
`addressing_format` (`uds.can.normal_addressing_information`.~~NormalFix~~ property), 63  
`addressing_format` (`uds.packet.abstract_can_packet_container`.~~AbstractCanPacketContainer~~ property), 83  
`addressing_format` (`uds.packet.can_packet`.~~CanPacket~~ property), 93  
`addressing_format` (`uds.packet.can_packet_record`.~~CanPacketRecord~~ property), 100  
`addressing_format` (`uds.segmentation.can_segmenter`.~~CanSegmenter~~ property), 106  
`ADDRESSING_FORMAT_NAME` (`uds.can.abstract_addressing_information`.~~AbstractCanAddressingInformation~~ attribute), 24  
`addressing_information` (`uds.segmentation.can_segmenter`.~~CanSegmenter~~ property), 106  
`addressing_information` (`uds.transport_interface.can_transport_interface`.~~AbstractCanTransportInterface~~ attribute), 116  
`ADDRESSING_INFORMATION_MAPPING` (`uds.can.addressing_information`.~~CanAddressingInformation~~ attribute), 28  
`addressing_type` (`uds.can.abstract_addressing_information`.~~PacketAIP~~ attribute), 22  
`addressing_type` (`uds.can.addressing_information`.~~CanAddressingInformation~~ attribute), 28  
`addressing_type` (`uds.packet.abstract_packet_type`.~~CanIdHandler~~ attribute), 51  
`addressing_type` (`uds.message.uds_message`.~~AbstractUdsMessageContainer~~ attribute), 127

property), 80  
 addressing\_type (*uds.message.uds\_message.UdsMessage*.*async\_send\_packet()*  
     property), 80  
 addressing\_type (*uds.message.uds\_message.UdsMessageRecord* method), 112  
     property), 81  
 addressing\_type (*uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainer*.*can\_transport\_interface.PyCanTransportInterface*.*method*), 120  
     property), 84  
 addressing\_type (*uds.packet.abstract\_packet.AbstractUdsAuthentication* attribute), 77  
 addressing\_type (*uds.packet.abstract\_packet.AbstractUdsAuthenticationRequired* attribute), 72  
 addressing\_type (*uds.packet.abstract\_packet.AbstractUdsPacketRecord* property), 89  
 addressing\_type (*uds.packet.can\_packet.CanPacket* BIG\_ENDIAN attribute), 122  
     property), 93  
 addressing\_type (*uds.packet.can\_packet\_record.CanPacketRecord* block\_size attribute), 85  
     property), 100  
 ADDRESSING\_TYPE\_NAME  
     (uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation.NRC attribute), 75  
     attribute), 24  
 ADDRESSING\_TYPE\_NAME  
     (uds.can.frame\_fields.CanIdHandler attribute), 52  
 AddressingType (class in *uds.transmission\_attributes.addressing*), 109  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation.Operations module attribute), 24  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.extended\_addressing\_information.ExtendedCanAddressingInformation.attribute), 36  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.mixed\_addressing\_information.Mixed11BitCanAddressingInformation attribute), 59  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.mixed\_addressing\_information.Mixed29BitCanAddressingInformation attribute), 61  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.normal\_addressing\_information.Normal11BitCanAddressingInformation attribute), 62  
 AI\_DATA\_BYTES\_NUMBER  
     (uds.can.normal\_addressing\_information.NormalFixedCanAddressingInformation attribute), 63  
 ALL\_REQUEST\_SIDS (in module *uds.message.service\_identifiers*), 76  
 ALL\_RESPONSE\_SIDS (in module *uds.message.service\_identifiers*), 76  
 AmbiguityError, 125  
 async\_receive\_packet() (method), 112  
 async\_receive\_packet() (uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface)

**B**

BrakeSwitchOrSwitchesNotClosed  
 BusyRepeatRequest (uds.message.nrc.NRC attribute), 71  
 ByteEnum (class in *uds.utilities.enums*), 128  
 bytes\_list\_to\_int() (in module *uds.utilities.operations*), 122

**C**

can\_id (uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation attribute), 24  
 can\_id (uds.can.abstract\_addressing\_information.PacketAIParamsAlias attribute), 22  
 can\_id (uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainer property), 83  
 can\_id (uds.packet.can\_packet\_record.CanPacketRecord property), 92  
 CAN\_ID\_NAME (uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation attribute), 24  
 CanAddressingFormat (class in *uds.can.addressing\_format*), 25  
 CanAddressingInformation (class in *uds.can.addressing\_information*), 26  
 CanAddressingInformation.DataBytesAIParamsAlias (class in *uds.can.addressing\_information*), 27  
 CanAddressingInformation.DecodedAIParamsAlias (class in *uds.can.addressing\_information*), 27  
 CanConsecutiveFrameHandler (class in *uds.can.consecutive\_frame*), 31  
 CanDlcHandler (class in *uds.can.frame\_fields*), 56  
 CanFirstFrameHandler (class in *uds.can.first\_frame*),

CanFlowControlHandler (class in `uds.can.flow_control`), 45  
CanFlowStatus (class in `uds.can.flow_control`), 43  
CanIdHandler (class in `uds.can.frame_fields`), 51  
CanIdHandler.CanIdAIAlias (class in `uds.can.frame_fields`), 51  
CanPacket (class in `uds.packet.can_packet`), 91  
CanPacketRecord (class in `uds.packet.can_packet_record`), 99  
CanPacketType (class in `uds.packet.can_packet_type`), 101  
CanSegmenter (class in `uds.segmentation.can_segmenter`), 105  
CanSingleFrameHandler (class in `uds.can.single_frame`), 64  
CanSTminTranslator (class in `uds.can.flow_control`), 44  
CertificateVerificationFailed\_InvalidCertificate (`uds.message.nrc.NRC` attribute), 73  
CertificateVerificationFailed\_InvalidChainOfTrust (`uds.message.nrc.NRC` attribute), 73  
CertificateVerificationFailed\_InvalidContent (`uds.message.nrc.NRC` attribute), 73  
CertificateVerificationFailed\_InvalidFormat (`uds.message.nrc.NRC` attribute), 73  
CertificateVerificationFailed\_InvalidScope (`uds.message.nrc.NRC` attribute), 73  
CertificateVerificationFailed\_InvalidSignature (`uds.message.nrc.NRC` attribute), 73  
ChallengeCalculationFailed (`uds.message.nrc.NRC` attribute), 73  
clear\_frames\_buffers() (method), 119  
ClearDiagnosticInformation (`uds.message.service_identifiers.RequestSID` attribute), 78  
CommunicationControl (`uds.message.service_identifiers.RequestSID` attribute), 77  
ConditionsNotCorrect (`uds.message.nrc.NRC` attribute), 72  
ConfigurationDataUsageFailed (`uds.message.nrc.NRC` attribute), 73  
CONSECUTIVE\_FRAME (`uds.packet.can_packet_type.CanPacketType` attribute), 102  
CONSECUTIVE\_FRAME\_N\_PCI (`uds.can.consecutive_frame.CanConsecutiveFrameHandler` attribute), 31  
ContinueToSend (`uds.can.flow_control.CanFlowStatus` attribute), 43  
ControlDTCSetting (`uds.message.service_identifiers.RequestSID` attribute), 77  
create\_any\_frame\_data() in `(uds.can.consecutive_frame.CanConsecutiveFrameHandler` class method), 32  
create\_any\_frame\_data() in `(uds.can.first_frame.CanFirstFrameHandler` class method), 38  
create\_any\_frame\_data() in `(uds.can.flow_control.CanFlowControlHandler` class method), 46  
create\_any\_frame\_data() in `(uds.can.single_frame.CanSingleFrameHandler` class method), 65  
create\_valid\_frame\_data() in `(uds.can.consecutive_frame.CanConsecutiveFrameHandler` class method), 31  
create\_valid\_frame\_data() in `(uds.can.first_frame.CanFirstFrameHandler` class method), 37  
create\_valid\_frame\_data() in `(uds.can.flow_control.CanFlowControlHandler` class method), 45  
create\_valid\_frame\_data() in `(uds.can.single_frame.CanSingleFrameHandler` class method), 64

**D**

data\_length (`uds.packet.abstract_can_packet_container.AbstractCanPack` property), 84  
data\_length (`uds.packet.abstract_packet.AbstractUdsPacket` property), 88  
data\_length (`uds.packet.abstract_packet.AbstractUdsPacketContainer` property), 87  
data\_length (`uds.packet.abstract_packet.AbstractUdsPacketRecord` property), 88  
DeAuthenticationFailed (`uds.message.nrc.NRC` attribute), 73  
decode() in `(uds.can.flow_control.CanSTminTranslator` class method), 44  
decode\_ai\_data\_bytes() in `(uds.can.addressing_information.CanAddressingInformation` class method), 29  
decode\_block\_size() in `(uds.can.flow_control.CanFlowControlHandler` class method), 48  
decode\_can\_id() in `(uds.can.frame_fields.CanIdHandler` class method), 52  
decode\_dlc() in `(uds.can.frame_fields.CanDlcHandler` class method), 57  
decode\_err\_ff\_dl() in `(uds.can.first_frame.CanFirstFrameHandler` class method), 39  
decode\_flow\_status()

<i>(uds.can.flow_control.CanFlowControlHandler class method), 47</i>	<i>encode()</i> ( <i>uds.can.flow_control.CanSTminTranslator class method</i> ), 44
<i>decode_mixed_addressed_29bit_can_id()</i> ( <i>uds.can.frame_fields.CanIdHandler method</i> ), 53	<i>encode_ai_data_bytes()</i> ( <i>uds.can.addressing_information.CanAddressingInformation class method</i> ), 30
<i>decode_normal_fixed_addressed_can_id()</i> ( <i>uds.can.frame_fields.CanIdHandler method</i> ), 52	<i>encode_dlc()</i> ( <i>uds.can.frame_fields.CanDlcHandler class method</i> ), 57
<i>decode_packet_ai()</i> ( <i>uds.can.addressing_information.CanAddress class method</i> ), 29	<i>encode_mixed_addressed_29bit_can_id()</i> ( <i>uds.can.frame_fields.CanIdHandler class method</i> ), 53
<i>decode_payload()</i> ( <i>uds.can.consecutive_frame.CanConsecutiveFrameHandler class method</i> ), 33	<i>encode_normal_fixed_addressed_can_id()</i> ( <i>uds.can.frame_fields.CanIdHandler class method</i> ), 53
<i>decode_payload()</i> ( <i>uds.can.first_frame.CanFirstFrameHandler class method</i> ), 39	<i>Endianness</i> ( <i>class in uds.utilities.bytes_operations</i> ), 121
<i>decode_payload()</i> ( <i>uds.can.single_frame.CanSingleFrameHandler class method</i> ), 66	<i>EngineIsNotRunning</i> ( <i>uds.message.nrc.NRC attribute</i> ), 74
<i>decode_sequence_number()</i> ( <i>uds.can.consecutive_frame.CanConsecutiveFrameHandler class method</i> ), 33	<i>EngineIsRunning</i> ( <i>uds.message.nrc.NRC attribute</i> ), 74
<i>decode_sf_dl()</i> ( <i>uds.can.single_frame.CanSingleFrameHandler class method</i> ), 66	<i>EngineRunTimeTooLow</i> ( <i>uds.message.nrc.NRC attribute</i> ), 74
<i>decode_st_min()</i> ( <i>uds.can.flow_control.CanFlowControlHandler class method</i> ), 48	<i>ExtendedNumberOfAttempts</i> ( <i>uds.message.nrc.NRC attribute</i> ), 72
<i>DEFAULT_FILLER_BYTE</i> ( <i>in module uds.can.frame_fields</i> ), 51	<i>ExtendableEnum</i> ( <i>class in uds.utilities.enums</i> ), 127
<i>DEFAULT_N_BR</i> ( <i>uds.transport_interface.can_transport_interface attribute</i> ), 117	<i>EXTENDED_ADDRESSING</i>
<i>DEFAULT_N_CS</i> ( <i>uds.transport_interface.can_transport_interface.AbstractCanTransportInterface attribute</i> ), 117	<i>ExtendedCanAddressingInformation</i> ( <i>class in uds.can.extended_addressing_information</i> ), 35
<i>desegmentation()</i> ( <i>uds.segmentation.abstract_segmenter.CanSegmenter class method</i> ), 104	<b>F</b>
<i>desegmentation()</i> ( <i>uds.segmentation.can_segmenter.CanSegmenter class method</i> ), 107	<i>FailurePreventsExecutionOfRequestedAction</i> ( <i>uds.message.nrc.NRC attribute</i> ), 72
<i>DiagnosticSessionControl</i> ( <i>uds.message.service_identifiers.RequestSID attribute</i> ), 77	<i>FillerByte</i> ( <i>uds.segmentation.can_segmenter.CanSegmenter property</i> ), 107
<i>direction</i> ( <i>uds.message.uds_message.UdsMessageRecord property</i> ), 81	<i>filler_byte</i> ( <i>uds.transport_interface.can_transport_interface.AbstractCanPacketContainer property</i> ), 116
<i>direction</i> ( <i>uds.packet.abstract_packet.AbstractUdsPacketRecord property</i> ), 88	<i>FIRST_FRAME</i> ( <i>uds.packet.can_packet_type.CanPacketType attribute</i> ), 102
<i>dlc</i> ( <i>uds.packet.abstract_can_packet_container.AbstractCanPacketContainer property</i> ), 84	<i>FIRST_FRAME_N_PCI</i> ( <i>uds.can.first_frame.CanFirstFrameHandler attribute</i> ), 37
<i>dlc</i> ( <i>uds.packet.can_packet.CanPacket property</i> ), 93	<i>FLOW_CONTROL</i> ( <i>uds.packet.can_packet_type.CanPacketType attribute</i> ), 102
<i>dlc</i> ( <i>uds.segmentation.can_segmenter.CanSegmenter property</i> ), 106	<i>FLOW_CONTROL_N_PCI</i> ( <i>uds.can.flow_control.CanFlowControlHandler attribute</i> ), 45
<i>dlc</i> ( <i>uds.transport_interface.can_transport_interface.AbstractCanTransportInterface property</i> ), 116	<i>flow_status</i> ( <i>uds.packet.abstract_can_packet_container.AbstractCanPacketContainer property</i> ), 85
<i>DynamicallyDefineDataIdentifier</i> ( <i>uds.message.service_identifiers.RequestSID attribute</i> ), 78	<i>FrameTransponderInterface</i> ( <i>uds.transport_interface.abstract_packet.AbstractUdsPacketRecord property</i> ), 88
<b>E</b>	<i>FS_BYTES_USED</i> ( <i>uds.can.flow_control.CanFlowControlHandler attribute</i> ), 45
<i>ECUReset</i> ( <i>uds.message.service_identifiers.RequestSID attribute</i> ), 77	<i>FUNCTIONAL</i> ( <i>uds.transmission_attributes.addressing.AddressingType attribute</i> ), 109
<b>G</b>	<i>GeneralProgrammingFailure</i> ( <i>uds.message.nrc.NRC attribute</i> ), 74

attribute), 74

GeneralReject (uds.message.nrc.NRC attribute), 71

get\_addressing\_information()  
    (uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainerHandler method), 86

get\_ai\_data\_bytes\_number()  
    (uds.can.addressing\_information.CanAddressingInformation class method), 30

get\_max\_payload\_size()  
    (uds.can.consecutive\_frame.CanConsecutiveFrameHandler class method), 34

get\_max\_payload\_size()  
    (uds.can.single\_frame.CanSingleFrameHandler class method), 67

get\_min\_dlc()  
    (uds.can.consecutive\_frame.CanConsecutiveFrameHandler class method), 34

get\_min\_dlc()  
    (uds.can.flow\_control.CanFlowControlHandler class method), 49

get\_min\_dlc()  
    (uds.can.frame\_fields.CanDlcHandler class method), 57

get\_min\_dlc()  
    (uds.can.single\_frame.CanSingleFrameHandler class method), 67

get\_payload\_size()  
    (uds.can.first\_frame.CanFirstFrameHandler class method), 40

get\_sf\_dl\_bytes\_number()  
    (uds.can.single\_frame.CanSingleFrameHandler class method), 68

|

InconsistentArgumentsError, 125

IncorrectMessageLengthOrInvalidFormat  
    (uds.message.nrc.NRC attribute), 71

InputOutputControlByIdentifier  
    (uds.message.service\_identifiers.RequestSID attribute), 78

int\_to\_bytes\_list()  
    (in module uds.utilities.bytes\_operations), 122

InvalidKey (uds.message.nrc.NRC attribute), 72

is\_can\_fd\_specific\_dlc()  
    (uds.can.frame\_fields.CanDlcHandler class method), 58

is\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 55

is\_compatible\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 54

is\_consecutive\_frame()  
    (uds.can.consecutive\_frame.CanConsecutiveFrameHandler class method), 32

is\_desegmented\_message()  
    (uds.segmentation.abstract\_segmenter.AbstractSegmenter class method), 104

is\_desegmented\_message()  
    (uds.segmentation.can\_segmenter.CanSegmenter class method), 103

method), 107

is\_extended\_addressed\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method)

is\_extended\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method)

is\_first\_frame()  
    (uds.can.first\_frame.CanFirstFrameHandler class method), 39

is\_initial\_packet\_type()  
    (uds.packet.abstract\_packet\_type.AbstractUdsPacketType class method), 90

is\_final\_packet\_type()  
    (uds.packet.can\_packet\_type.CanPacketType class method), 102

is\_input\_packet()  
    (uds.segmentation.abstract\_segmenter.AbstractSegmenter class method), 104

is\_member()  
    (uds.utilities.enums.ValidatedEnum class method), 107

is\_mixed\_11bit\_addressed\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 55

is\_mixed\_29bit\_addressed\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 55

is\_normal\_11bit\_addressed\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 54

is\_normal\_fixed\_addressed\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 54

is\_request\_sid()  
    (uds.message.service\_identifiers.RequestSID class method), 78

is\_response\_sid()  
    (uds.message.service\_identifiers.ResponseSID class method), 79

is\_single\_frame()  
    (uds.can.single\_frame.CanSingleFrameHandler class method), 66

is\_standard\_can\_id()  
    (uds.can.frame\_fields.CanIdHandler class method), 56

is\_supported\_bus\_manager()  
    (uds.transport\_interface.abstract\_transport\_interface.AbstractTransportInterface static method), 111

is\_supported\_bus\_manager()  
    (uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface static method), 119

is\_supported\_packet\_type()  
    (uds.segmentation.abstract\_segmenter.AbstractSegmenter class method), 103

is\_supported\_packets\_sequence\_type()  
    (uds.segmentation.can\_segmenter.CanSegmenter class method), 103

`(uds.segmentation.abstract_segmenter.AbstractSegmenter.MIN_EXTENDED_VALUE (uds.can.frame_fields.CanIdHandler method), 104`  
`is_time_value() (uds.can.flow_control.CanSTminTranslator.MIN_RAW_VALUE_100US_RANGE class method), 45`

**L**

`LinkControl (uds.message.service_identifiers.RequestSID attribute), 77`  
`LITTLE_ENDIAN (uds.utilities.bytes_operations.Endianness attribute), 122`  
`LONG_FF_DL_BYTES_USED (uds.can.first_frame.CanFirstFrameHandler attribute), 37`  
`LONG_SF_DL_BYTES_USED (uds.can.single_frame.CanSingleFrameHandler attribute), 64`

**M**

`MAX_DATA_BYTES_NUMBER (uds.can.frame_fields.CanDlcHandler attribute), 57`  
`MAX_DLC_VALUE (uds.can.frame_fields.CanDlcHandler attribute), 57`  
`MAX_DLC_VALUE_SHORT_SF_DL (uds.can.single_frame.CanSingleFrameHandler attribute), 64`  
`MAX_EXTENDED_VALUE (uds.can.frame_fields.CanIdHandler attribute), 52`  
`MAX_LONG_FF_DL_VALUE (uds.can.first_frame.CanFirstFrameHandler attribute), 37`  
`MAX_RAW_VALUE_100US_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MAX_SHORT_FF_DL_VALUE (uds.can.first_frame.CanFirstFrameHandler attribute), 37`  
`MAX_STANDARD_VALUE (uds.can.frame_fields.CanIdHandler attribute), 51`  
`MAX_STMIN_TIME (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MAX_TIME_VALUE_100US_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MAX_VALUE_MS_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MIN_BASE_UDS_DLC (uds.can.frame_fields.CanDlcHandler attribute), 57`  
`MIN_DATA_BYTES_NUMBER (uds.can.frame_fields.CanDlcHandler attribute), 57`  
`MIN_DLC_VALUE (uds.can.frame_fields.CanDlcHandler attribute), 57`

`MIN_EXTENDED_VALUE (uds.can.frame_fields.CanIdHandler attribute), 52`  
`MIN_RAW_VALUE_100US_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MIN_STANDARD_VALUE (uds.can.frame_fields.CanIdHandler attribute), 51`  
`MIN_TIME_VALUE_100US_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`MIN_VALUE_MS_RANGE (uds.can.flow_control.CanSTminTranslator attribute), 44`  
`Mixed11BitCanAddressingInformation (class in uds.can.mixed_addressing_information), 59`  
`Mixed29BitCanAddressingInformation (class in uds.can.mixed_addressing_information), 60`  
`MIXED_11BIT_ADDRESSING (uds.can.addressing_format.CanAddressingFormat attribute), 26`  
`MIXED_29BIT_ADDRESSING (uds.can.addressing_format.CanAddressingFormat attribute), 26`  
`MIXED_29BIT_FUNCTIONAL_ADDRESSING_OFFSET (uds.can.frame_fields.CanIdHandler attribute), 52`  
`MIXED_29BIT_PHYSICAL_ADDRESSING_OFFSET (uds.can.frame_fields.CanIdHandler attribute), 52`  
`module`  
`uds, 21`  
`uds.can, 21`  
`uds.can.abstract_addressing_information, 22`  
`uds.can.addressing_format, 25`  
`uds.can.addressing_information, 26`  
`uds.can.consecutive_frame, 30`  
`uds.can.extended_addressing_information, 35`  
`uds.can.first_frame, 37`  
`uds.can.flow_control, 42`  
`uds.can.frame_fields, 50`  
`uds.can.mixed_addressing_information, 59`  
`uds.can.normal_addressing_information, 61`  
`uds.can.single_frame, 64`  
`uds.message, 70`  
`uds.message.nrc, 70`  
`uds.message.service_identifiers, 76`  
`uds.message.uds_message, 79`  
`uds.packet, 83`  
`uds.packet.abstract_can_packet_container, 83`  
`uds.packet.abstract_packet, 86`  
`uds.packet.abstract_packet_type, 90`  
`uds.packet.can_packet, 91`

uds.packet.can\_packet\_record, 99  
uds.packet.can\_packet\_type, 101  
uds.segmentation, 102  
uds.segmentation.abstract\_segmenter, 102  
uds.segmentation.can\_segmenter, 105  
uds.transmission\_attributes, 109  
uds.transmission\_attributes.addressing, 109  
uds.transmission\_attributes.transmission\_direction, 110  
uds.transport\_interface, 110  
uds.transport\_interface.abstract\_transport\_interface, 111  
uds.transport\_interface.can\_transport\_interface, 113  
uds.utilities, 121  
uds.utilities.bytes\_operations, 121  
uds.utilities.common\_types, 123  
uds.utilities.custom\_exceptions, 124  
uds.utilities.custom\_warnings, 126  
uds.utilities.enums, 127

**N**

n\_ar\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 114  
n\_ar\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 118  
N\_AR\_TIMEOUT(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.attribute), 117  
n\_ar\_timeout(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 114  
n\_as\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 114  
n\_as\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 118  
N\_AS\_TIMEOUT(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.attribute), 116  
n\_as\_timeout(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 114  
n\_br(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 115  
n\_br\_max(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 115  
n\_bs\_measured(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 115  
n\_bs\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 118  
N\_BS\_TIMEOUT(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.attribute), 117  
n\_bs\_timeout(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 115  
n\_cr\_measured(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 116

n\_cr\_measured(uds.transport\_interface.can\_transport\_interface.PyCanTransportInterface.property), 118  
N\_CR\_TIMEOUT(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.attribute), 117  
n\_cr\_timeout(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 116  
n\_cs(uds.transport\_interface.can\_transport\_interface.AbstractCanTransportInterface.property), 115  
NegativeResponse(uds.message.service\_identifiers.ResponseSID.property), 79  
NibbleEnum(class in uds.utilities.enums), 128  
NResponseFromSubnetComponent(uds.message.nrc.NRC attribute), 72  
Normal11BitCanAddressingInformation(class in uds.can.normal\_addressing\_information), 61  
NORMAL\_11BIT\_ADDRESSING(uds.can.addressing\_format.CanAddressingFormat.attribute), 26  
NORMAL\_FIXED\_ADDRESSING(uds.can.addressing\_format.CanAddressingFormat.attribute), 26  
NORMAL\_FIXED\_FUNCTIONAL\_ADDRESSING\_OFFSET(uds.can.frame\_fields.CanIdHandler attribute), 52  
NORMAL\_FIXED\_PHYSICAL\_ADDRESSING\_OFFSET(uds.can.frame\_fields.CanIdHandler attribute), 52  
NormalFixedCanAddressingInformation(class in uds.can.normal\_addressing\_information), 62  
NRC(class in uds.message.TransportInterface), 71

**O**

Overflow(uds.can.flow\_control.CanFlowStatus attribute), 116  
OwnershipVerificationFailed

**P**

packet\_type(uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainer.property), 88  
packet\_type(uds.packet.abstract\_packet.AbstractUdsPacket.property), 88  
packet\_type(uds.packet.abstract\_packet.AbstractUdsPacketContainer.property), 89  
packet\_type(uds.packet.abstract\_packet.AbstractUdsPacketRecord.property), 89  
packet\_type(uds.packet.can\_packet.CanPacket.property), 89  
packet\_type(uds.packet.can\_packet\_record.CanPacketRecord.property), 90  
PacketAIParamsAlias(class in uds.can.abstract\_addressing\_information), 90

22  
**packets\_records** (*uds.message.uds\_message.UdsMessage*  
     *property*), 81  
**PacketsContainersSequence** (in  
     *uds.packet.abstract\_packet*), 89  
**PacketsRecordsSequence** (in  
     *uds.packet.abstract\_packet*), 90  
**PacketsRecordsTuple** (in  
     *uds.packet.abstract\_packet*), 90  
**PacketsTuple** (in module *uds.packet.abstract\_packet*), 90  
**payload** (*uds.message.uds\_message.AbstractUdsMessageContainer*  
     *property*), 80  
**payload** (*uds.message.uds\_message.UdsMessage*  
     *property*), 80  
**payload** (*uds.message.uds\_message.UdsMessageRecord*  
     *property*), 81  
**payload** (*uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainer*  
     *property*), 85  
**payload** (*uds.packet.abstract\_packet.AbstractUdsPacket*  
     *property*), 88  
**payload** (*uds.packet.abstract\_packet.AbstractUdsPacketContainer*  
     *property*), 87  
**payload** (*uds.packet.abstract\_packet.AbstractUdsPacketRequest*  
     *property*), 89  
**PHYSICAL** (*uds.transmission\_attributes.addressing.AddressingType*  
     *attribute*), 109  
**PyCanTransportInterface** (class in  
     *uds.transport\_interface.can\_transport\_interface*), 117  
**R**  
**raw\_frame\_data** (*uds.packet.abstract\_can\_packet\_container*  
     *property*), 83  
**raw\_frame\_data** (*uds.packet.abstract\_packet.AbstractUdsPacket*  
     *property*), 87  
**raw\_frame\_data** (*uds.packet.abstract\_packet.AbstractUdsPacketContainer*  
     *property*), 87  
**raw\_frame\_data** (*uds.packet.abstract\_packet.AbstractUdsPacketRecord*  
     *property*), 89  
**raw\_frame\_data** (*uds.packet.can\_packet.CanPacket*  
     *property*), 92  
**raw\_frame\_data** (*uds.packet.can\_packet\_record.CanPacketRecord*  
     *property*), 99  
**RawBytesAlias** (in module *uds.utilities.common\_types*), 123  
**RawBytesListAlias** (in module *uds.utilities.common\_types*), 123  
**RawBytesSetAlias** (in module *uds.utilities.common\_types*), 123  
**RawBytesTupleAlias** (in module *uds.utilities.common\_types*), 123  
**ReadDataByIdentifier** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**ReadDataByPeriodicIdentifier** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**ReadDTCInformation** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**ReadMemoryByAddress** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**ReadScalingDataByIdentifier** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**ReassignmentError**, 124  
**receive\_packet()** (*uds.transport\_interface.abstract\_transport\_interface*.  
     *method*), 112  
**receive\_packet()** (*uds.transport\_interface.can\_transport\_interface.PyCAN*.  
     *method*), 120  
**RECEIVED** (*uds.transmission\_attributes.transmission\_direction.Transmission*.  
     *attribute*), 110  
**RequestCorrectlyReceived\_ResponsePending** (*uds.message.nrc.NRC* attribute), 74  
**RequestDownload** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**RequestFileTransfer** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**RequestOutOfRange** (*uds.message.nrc.NRC* attribute), 78  
**RequestSequenceError** (*uds.message.nrc.NRC* attribute), 72  
**RequestSID** (class in *uds.message.service\_identifiers*), 77  
**RequestTransferEvent** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**RequestUpload** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**RequiredTimeDelayNotExpired**  
**ResourceTemporarilyNotAvailable** (*uds.message.nrc.NRC* attribute), 76  
**ResponseOnEvent** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 77  
**ResponseSID** (class in *uds.message.service\_identifiers*), 78  
**ResponseTooLong** (*uds.message.nrc.NRC* attribute), 71  
**RoutineControl** (*uds.message.service\_identifiers.RequestSID*  
     *attribute*), 78  
**RpmTooHigh** (*uds.message.nrc.NRC* attribute), 74  
**RpmTooLow** (*uds.message.nrc.NRC* attribute), 74  
**rx\_packets\_functional\_ai** (*uds.can.abstract\_addressing\_information.AbstractCanAddressing*.  
     *property*), 24  
**rx\_packets\_functional\_ai**

(*uds.segmentation.can\_segmenter.CanSegmenter*.set\_address\_information\_normal\_fixed()  
property), 106  
*rx\_packets\_physical\_ai*  
(*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation*.AbstractCanAdd(~~excluding~~ *rx\_min\_ipacket.CanPacket* method), 97  
property), 24  
*rx\_packets\_physical\_ai*  
(*uds.segmentation.can\_segmenter.CanSegmenter*.set\_consecutive\_frame\_data()  
property), 106  
**S**  
*SecureDataTransmissionNotAllowed*  
(*uds.message.nrc.NRC* attribute), 72  
*SecureDataTransmissionRequired*  
(*uds.message.nrc.NRC* attribute), 72  
*SecureDataVerificationFailed*  
(*uds.message.nrc.NRC* attribute), 72  
*SecuredDataTransmission*  
(*uds.message.service\_identifiers.RequestSID* attribute), 78  
*SecurityAccess* (*uds.message.service\_identifiers.RequestSID* attribute), 77  
*SecurityAccessDenied* (*uds.message.nrc.NRC* attribute), 72  
*segmentation()* (*uds.segmentation.abstract\_segmenter.AbstractSegmenter*.method), 105  
*segmentation()* (*uds.segmentation.can\_segmenter.CanSegmenter*.method), 108  
*SegmentationError*, 103  
*segmenter* (*uds.transport\_interface.abstract\_transport\_interface*.AbstractTransportInterface.property), 111  
*segmenter* (*uds.transport\_interface.can\_transport\_interface*.AbstractCanTransportInterface.property), 114  
*send\_packet()* (*uds.transport\_interface.abstract\_transport\_interface*.method), 112  
*send\_packet()* (*uds.transport\_interface.can\_transport\_interface*.method), 119  
*sequence\_number* (*uds.packet.abstract\_can\_packet\_container*.AbstractCanPacketContainer.property), 85  
*ServiceNotSupported* (*uds.message.nrc.NRC* attribute), 71  
*ServiceNotSupportedInActiveSession*  
(*uds.message.nrc.NRC* attribute), 74  
*SessionKeyCreationOrDerivationFailed*  
(*uds.message.nrc.NRC* attribute), 73  
*set\_address\_information()*  
(*uds.packet.can\_packet*.CanPacket method), 94  
*set\_address\_information\_extended()*  
(*uds.packet.can\_packet*.CanPacket method), 95  
*set\_address\_information\_mixed\_11bit()*  
(*uds.packet.can\_packet*.CanPacket method), 95  
*set\_address\_information\_mixed\_29bit()*  
(*uds.packet.can\_packet*.CanPacket method), 95  
*set\_address\_information\_normal\_11bit()*  
(*uds.packet.can\_packet*.CanPacket method), 94  
*set\_address\_information\_normal\_fixed()*  
(*uds.packet.can\_packet*.CanPacket method), 94  
*set\_consecutive\_frame\_data()*  
*set\_first\_frame\_data()*  
(*uds.packet.can\_packet*.CanPacket method), 97  
*set\_flow\_control\_data()*  
(*uds.packet.can\_packet*.CanPacket method), 98  
*set\_packet\_data()* (*uds.packet.can\_packet*.CanPacket method), 95  
*set\_single\_frame\_data()*  
(*uds.packet.can\_packet*.CanPacket method), 96  
*SettingAccessRightsFailed* (*uds.message.nrc.NRC* attribute), 73  
*ShifterLeverNotInPark* (*uds.message.nrc.NRC* attribute), 75  
*SHORT\_FF\_DL\_BYTES\_USED*  
(*uds.can.first\_frame.CanFirstFrameHandler* attribute), 37  
*SHORT\_SF\_DL\_BYTES\_USED*  
(*uds.can.single\_frame.CanSingleFrameHandler* attribute), 64  
*SINGLE\_FRAME* (*uds.packet.can\_packet\_type.CanPacketType* attribute), 102  
*SINGLE\_FRAME\_N\_PCI* (*uds.can.single\_frame.CanSingleFrameHandler* attribute), 64  
*SN\_BYTES\_USED* (*uds.can.consecutive\_frame.CanConsecutiveFrameHandler* attribute), 31  
*source\_address* (*uds.transport\_interface*.AbstractTransportInterface.property), 24  
*source\_address* (*uds.transport\_interface*.AbstractTransportInterface.property), 22  
*source\_address* (*uds.transport\_interface*.CanAddressingInformation.property), 28  
*source\_address* (*uds.can.frame\_fields*.CanIdHandler.CanIdAlias attribute), 51  
*source\_address* (*uds.packet.abstract\_can\_packet\_container*.AbstractCanPacketContainer.property), 84  
*source\_address* (*uds.packet.can\_packet*.CanPacket property), 93  
*source\_address* (*uds.packet.can\_packet\_record*.CanPacketRecord property), 100  
*SOURCE\_ADDRESS\_NAME*  
(*uds.can.abstract\_addressing\_information*.AbstractCanAddressingInformation attribute), 24  
*SOURCE\_ADDRESS\_NAME*  
(*uds.can.frame\_fields*.CanIdHandler attribute), 52  
*st\_min* (*uds.packet.abstract\_can\_packet\_container*.AbstractCanPacketContainer.property), 86  
*STMIN\_BYTE\_POSITION*  
(*uds.can.flow\_control*.CanFlowControlHandler attribute), 45  
*SubFunctionNotSupported* (*uds.message.nrc.NRC* attribute), 106

*tribute), 71*  
**SubFunctionNotSupportedInActiveSession** (*uds.message.nrc.NRC attribute*), 74  
**supported\_packet\_class** (*uds.segmentation.abstract\_segmenter.AbstractSegmenter* property), 103  
**supported\_packet\_class** (*uds.segmentation.can\_segmenter.CanSegmenter* property), 106  
**supported\_packet\_record\_class** (*uds.segmentation.abstract\_segmenter.AbstractSegmenter* property), 103  
**supported\_packet\_record\_class** (*uds.segmentation.can\_segmenter.CanSegmenter* property), 106

**T**

**target\_address** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 24  
**target\_address** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 22  
**target\_address** (*uds.can.addressing\_information.CanAddressingInformation* attribute), 27  
**target\_address** (*uds.can.addressing\_information.CanAddressingInformation* attribute), 28  
**target\_address** (*uds.can.frame\_fields.CanIdHandler* attribute), 51  
**target\_address** (*uds.packet.abstract\_can\_packet\_container.AbstractCanPacketContainer* property), 84  
**target\_address** (*uds.packet.can\_packet.CanPacket* property), 93  
**target\_address** (*uds.packet.can\_packet\_record.CanPacketRecord* property), 100  
**TARGET\_ADDRESS\_NAME** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 24  
**TARGET\_ADDRESS\_NAME** (*uds.frame\_fields.CanIdHandler* attribute), 52  
**TemperatureTooHigh** (*uds.message.nrc.NRC attribute*), 75  
**TemperatureTooLow** (*uds.message.nrc.NRC attribute*), 75  
**TesterPresent** (*uds.message.service\_identifiers.RequestSID attribute*), 77  
**ThrottleOrPedalTooHigh** (*uds.message.nrc.NRC attribute*), 75  
**ThrottleOrPedalTooLow** (*uds.message.nrc.NRC attribute*), 75  
**TimeMillisecondsAlias** (*in uds.utilities.common\_types*), 123  
**TorqueConvertClutchLocked** (*uds.message.nrc.NRC attribute*), 75

**TransferData** (*uds.message.service\_identifiers.RequestSID attribute*), 78  
**TransferDataSuspended** (*uds.message.nrc.NRC attribute*), 74  
**transmission\_end** (*uds.message.uds\_message.UdsMessageRecord* property), 82  
**transmission\_start** (*uds.message.uds\_message.UdsMessageRecord* property), 82  
**transmission\_time** (*uds.packet.abstract\_packet.AbstractUdsPacketRecord* property), 89

**TransmissionDirection** (class in *uds.transmission\_attributes.transmission\_direction*), 110  
**TransmissionRangeNotInGear** (*uds.message.nrc.NRC attribute*), 75  
**TransmissionRangeNotInNeutral** (*uds.message.nrc.NRC attribute*), 75

**TRANSMITTED** (*uds.transmission\_attributes.transmission\_direction.TransmissionDirection* attribute), 110

**tx\_packets\_functional\_ai** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 24  
**tx\_packets\_physical\_ai** (*uds.segmentation.can\_segmenter.CanSegmenter* property), 106  
**tx\_packets\_physical\_ai** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 51  
**tx\_packets\_physical\_ai** (*uds.segmentation.can\_segmenter.CanSegmenter* property), 106  
**tx\_packets\_physical\_ai** (*uds.can.abstract\_addressing\_information.AbstractCanAddressingInformation* attribute), 84  
**tx\_packets\_physical\_ai** (*uds.segmentation.can\_segmenter.CanSegmenter* property), 106

**U**

**uds**  
**uds.can**  
**uds.can.abstract\_addressing\_information** module, 21  
**uds.can.abstract\_addressing\_information** module, 22  
**uds.can.addressing\_format** module, 25  
**uds.can.addressing\_information** module, 26  
**uds.can.consecutive\_frame** module, 30  
**uds.can.extended\_addressing\_information** module, 35  
**uds.can.first\_frame** module, 37  
**uds.can.flow\_control** module, 42  
**uds.can.frame\_fields** module, 50  
**uds.can.mixed\_addressing\_information**

```
    module, 59
uds.can.normal_addressing_information
    module, 61
uds.can.single_frame
    module, 64
uds.message
    module, 70
uds.message.nrc
    module, 70
uds.message.service_identifiers
    module, 76
uds.message.uds_message
    module, 79
uds.packet
    module, 83
uds.packet.abstract_can_packet_container
    module, 83
uds.packet.abstract_packet
    module, 86
uds.packet.abstract_packet_type
    module, 90
uds.packet.can_packet
    module, 91
uds.packet.can_packet_record
    module, 99
uds.packet.can_packet_type
    module, 101
uds.segmentation
    module, 102
uds.segmentation.abstract_segmenter
    module, 102
uds.segmentation.can_segmenter
    module, 105
uds.transmission_attributes
    module, 109
uds.transmission_attributes.addressing
    module, 109
uds.transmission_attributes.transmission_direction
    module, 110
uds.transport_interface
    module, 110
uds.transport_interface.abstract_transport_interface
    module, 111
uds.transport_interface.can_transport_interface
    module, 113
uds.utilities
    module, 121
uds.utilities.bytes_operations
    module, 121
uds.utilities.common_types
    module, 123
uds.utilities.custom_exceptions
    module, 124
uds.utilities.custom_warnings
    module, 126
uds.utilities.enums
    module, 127
UdsMessage (class in uds.message.uds_message), 80
UdsMessageRecord (class in uds.message.uds_message), 81
UnrecognizedSIDWarning, 76
UnrecognizedSTminWarning, 43
UnusedArgumentError, 125
UnusedArgumentWarning, 126
UploadDownloadNotAccepted (uds.message.nrc.NRC attribute), 73
use_data_optimization
    (uds.segmentation.can_segmenter.CanSegmenter property), 107
use_data_optimization
    (uds.transport_interface.can_transport_interface.AbstractCanTransportInterface property), 116
```

**V**

```
validate_ai_data_bytes()
    (uds.can.addressing_information.CanAddressingInformation class method), 29
validate_can_id() (uds.can.frame_fields.CanIdHandler class method), 56
validate_data_bytes_number()
    (uds.can.frame_fields.CanDlcHandler class method), 58
validate_dlc() (uds.can.frame_fields.CanDlcHandler class method), 58
validate_ff_dl() (uds.can.first_frame.CanFirstFrameHandler class method), 40
validate_frame_data()
    (uds.can.consecutive_frame.CanConsecutiveFrameHandler class method), 34
validate_frame_data()
    (uds.can.first_frame.CanFirstFrameHandler class method), 40
validate_frame_data()
    (uds.can.flow_control.CanFlowControlHandler class method), 49
validate_frame_data()
    (uds.can.single_frame.CanSingleFrameHandler class method), 68
validate_member() (uds.utilities.enums.ValidatedEnum class method), 128
validate_nibble() (in uds.utilities.common_types), 123
validate_packet_ai()
    (uds.can.abstract_addressing_information.AbstractCanAddressingInformation class method), 25
validate_packet_ai()
    (uds.can.addressing_information.CanAddressingInformation class method), 28
```

validate\_packet\_ai()  
    (*uds.can.extended\_addressing\_information.ExtendedCanAddressingInformation class method*), 36  
validate\_packet\_ai()  
    (*uds.can.mixed\_addressing\_information.Mixed11BitCanAddressingInformation class method*), 59  
validate\_packet\_ai()  
    (*uds.can.mixed\_addressing\_information.Mixed29BitCanAddressingInformation class method*), 61  
validate\_packet\_ai()  
    (*uds.can.normal\_addressing\_information.Normal11BitCanAddressingInformation class method*), 62  
validate\_packet\_ai()  
    (*uds.can.normal\_addressing\_information.NormalFixedCanAddressingInformation class method*), 63  
validate\_raw\_byte()           (in           module  
    *uds.utilities.common\_types*), 124  
validate\_raw\_bytes()          (in           module  
    *uds.utilities.common\_types*), 124  
validate\_sf\_dl() (*uds.can.single\_frame.CanSingleFrameHandler class method*), 68  
ValidatedEnum (*class in uds.utilities.enums*), 127  
ValueWarning, 126  
VehicleSpeedTooHigh   (*uds.message.nrc.NRC attribute*), 75  
VehicleSpeedTooLow (*uds.message.nrc.NRC attribute*), 75  
VoltageTooHigh (*uds.message.nrc.NRC attribute*), 75  
VoltageTooLow (*uds.message.nrc.NRC attribute*), 76

## W

Wait (*uds.can.flow\_control.CanFlowStatus attribute*), 43  
WriteDataByIdentifier  
    (*uds.message.service\_identifiers.RequestSID attribute*), 78  
WriteMemoryByAddress  
    (*uds.message.service\_identifiers.RequestSID attribute*), 78  
WrongBlockSequenceCounter (*uds.message.nrc.NRC attribute*), 74